

DF-308 OWNER'S MANUAL CONTENTS

1. INTRODUCTION	2
2. SAFETY PRECAUTIONS	3
3. LIST OF PARTS	4
4. ASSEMBLE THE PRODUCT	10
STEP 1 Connector Installation	10
STEP 2 Cover Support Plate Installation	12
STEP 3 Weight Stack Installation	15
STEP 4 Apply the Weight Stack Sticker	19
STEP 5 Press Handle Installation	20
STEP 6 Seat Frame Installation	21
STEP 7 Seat Frame Leveling Test	24
STEP 8 Seat Back Installation	25
STEP 9 Cable Installation	26
STEP 10 Cable Adjustment	29
STEP 11 Cable Adjustment if too Loose	30
STEP 12 Covers Installation	31
STEP 13 Install cap nut	34
STEP 14 Secure the Product	35
STEP 15 Level the Product	36
STEP 16 Stack Fork Inspections	37
STEP 17 Unit Inspection	38
5. OPERATION INSTRUCTION	39
OPERATION Operating the Product	39
OPERATION Exercising Instructions	42
OPERATION Safety Operating Area	43
6. MAINTENANCE	44
MAINTENANCE Safety Precautions	44
MAINTENANCE Guide Rod Cleaning and Lubricating	45
MAINTENANCE Schedule	46
MAINTENANCE Task List	47
MAINTENANCE One-Year Maintenance Log	48
7. CONSIGNES DE SÉCURITÉ IMPORTANTES	49
8. APPENDIXES	50

Disclaimer

The information in this user manual is subject to change without prior notice.

Sports Art Industrial Co., Ltd. makes no representation or warranty of any kind, express or implied, regarding the marketability of this manual, the suitability for a special purpose, or any other matters.


SportsArt Industrial Co., Ltd. accepts no responsibility for any errors in this manual, or any damages incurred directly, indirectly, accidentally, or continually from the modification, display, or other use of this manual.

*We reserve the right to revise this manual at any time without notice.

1. INTRODUCTION

Congratulations on the purchase of a high quality SportsArt product, the DF-308 Multi Press machine. Constructed of high quality materials and designed for years of reliable performance, this product was made for full commercial use.

Before this product is assembled or operated, we recommend that you familiarize yourself with this manual. Understanding the correct assembly and operation of this product will help ensure that exercisers obtain their fitness goals safely and successfully.

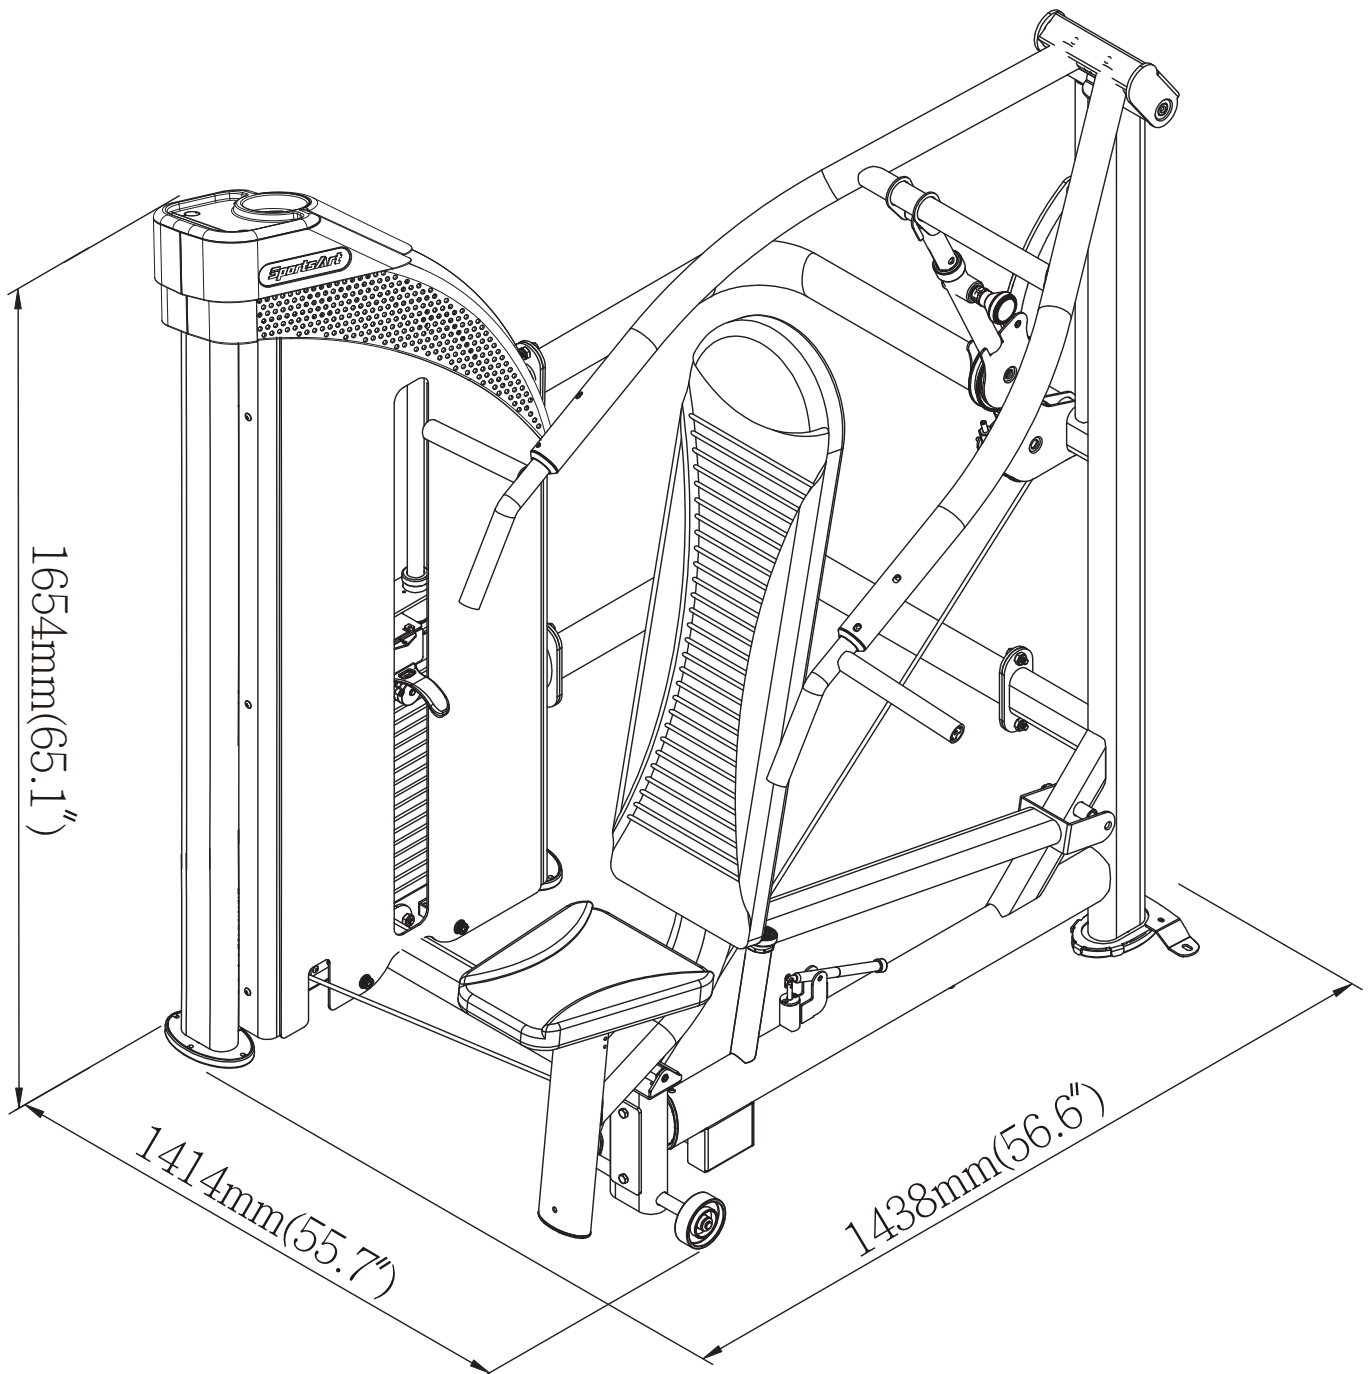

2. SAFETY PRECAUTIONS

This product was designed and built for optimum safety. However certain precautions apply during the use of this product. Please note the following safety precautions:


- Please read the entire manual before assembly and operation. Make sure the product is installed and operated as instructed in this manual.
- Assemble and operate the product on a solid, level surface. Do not use outdoors or near water, including pools and saunas.
- Check the product before every use. Make sure all parts are assembled, and all fasteners are tightened. Do not use the product if it is disassembled in any way.
- Wear proper workout clothing. Do not wear loose clothing. Do not wear shoes with leather soles or high heels. Tie all long hair back. Do not go barefoot on this product.
- Keep away from moving parts. Moving parts may or may not stop immediately if an object becomes caught or impedes normal motion.
- Use this product only for its intended purpose as described in this manual.
- Be careful when mounting and dismounting the unit.
- Never operate this product if it has been damaged in any way. If it is not working properly, or has been dropped or damaged, contact a service technician for repairs.
- Do not use accessories or parts that are not specifically recommended by the manufacturer (SportsArt). Such parts might cause injuries or cause the unit to fail and void the warranty. We are not responsible for any safety issue that arises due to the misuse of accessories or parts. At the same time, we will terminate the warranty terms of this equipment.
- This product is not intended for use by persons (including children 12 or younger) with reduced physical, sensory, or mental capabilities, or by people who are otherwise deficient in product knowledge or experience. If such people use this product, they should be given training and be supervised at all times by someone responsible for their safety.
- Contact your SportsArt representatives on all materials damaged in shipment. (Note: Shipping damages are the responsibility of the carrier.)
- Unpack and verify contents of boxes according to the list of parts to check if any parts are missing.
- Children 12 or younger should be supervised to ensure that they do not play on or near the product.
- The user weight limit for this product is 227 kg, 500 lb.
- Maintenance and repair must be performed by trained service personnel only. Improper maintenance would not only damage the machine, but may also present a danger to the exerciser.
- Over exercise may result in serious injury or death
- Warning that any of the adjustment devices that could interfere with the user's movement should not be left projecting.

CAUTION: If you feel any pain or any abnormal sensations, **STOP YOUR WORKOUT** and consult your physician immediately. Work within your recommended exercise level. **DO NOT** work to exhaustion. Before beginning any exercise program, you should consult with your doctor. It is recommended that you undergo a complete physical examination.


*NOTE: Each machine provides a different resistance ratio of weight stack.

3. LIST OF PARTS


Box A

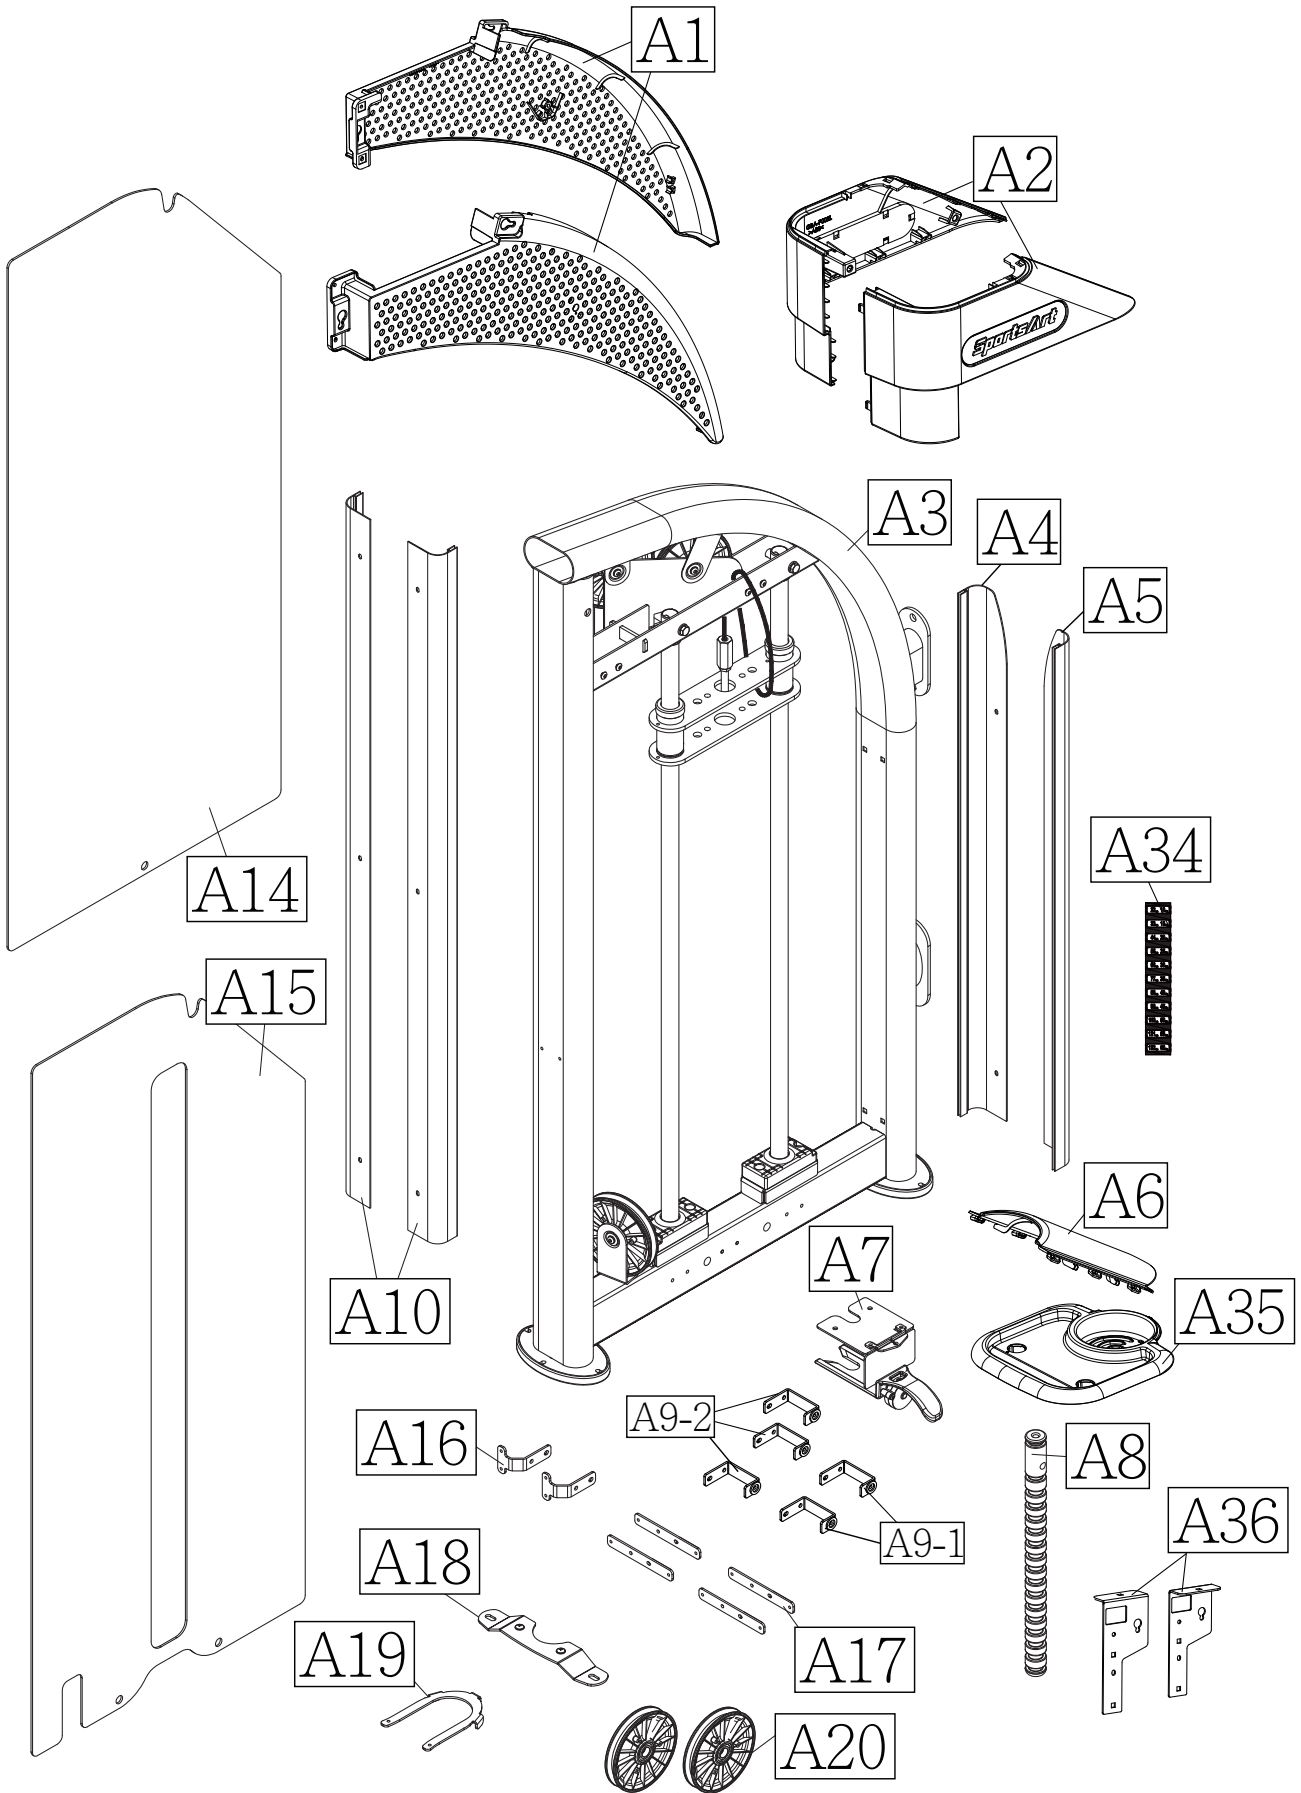

Box B

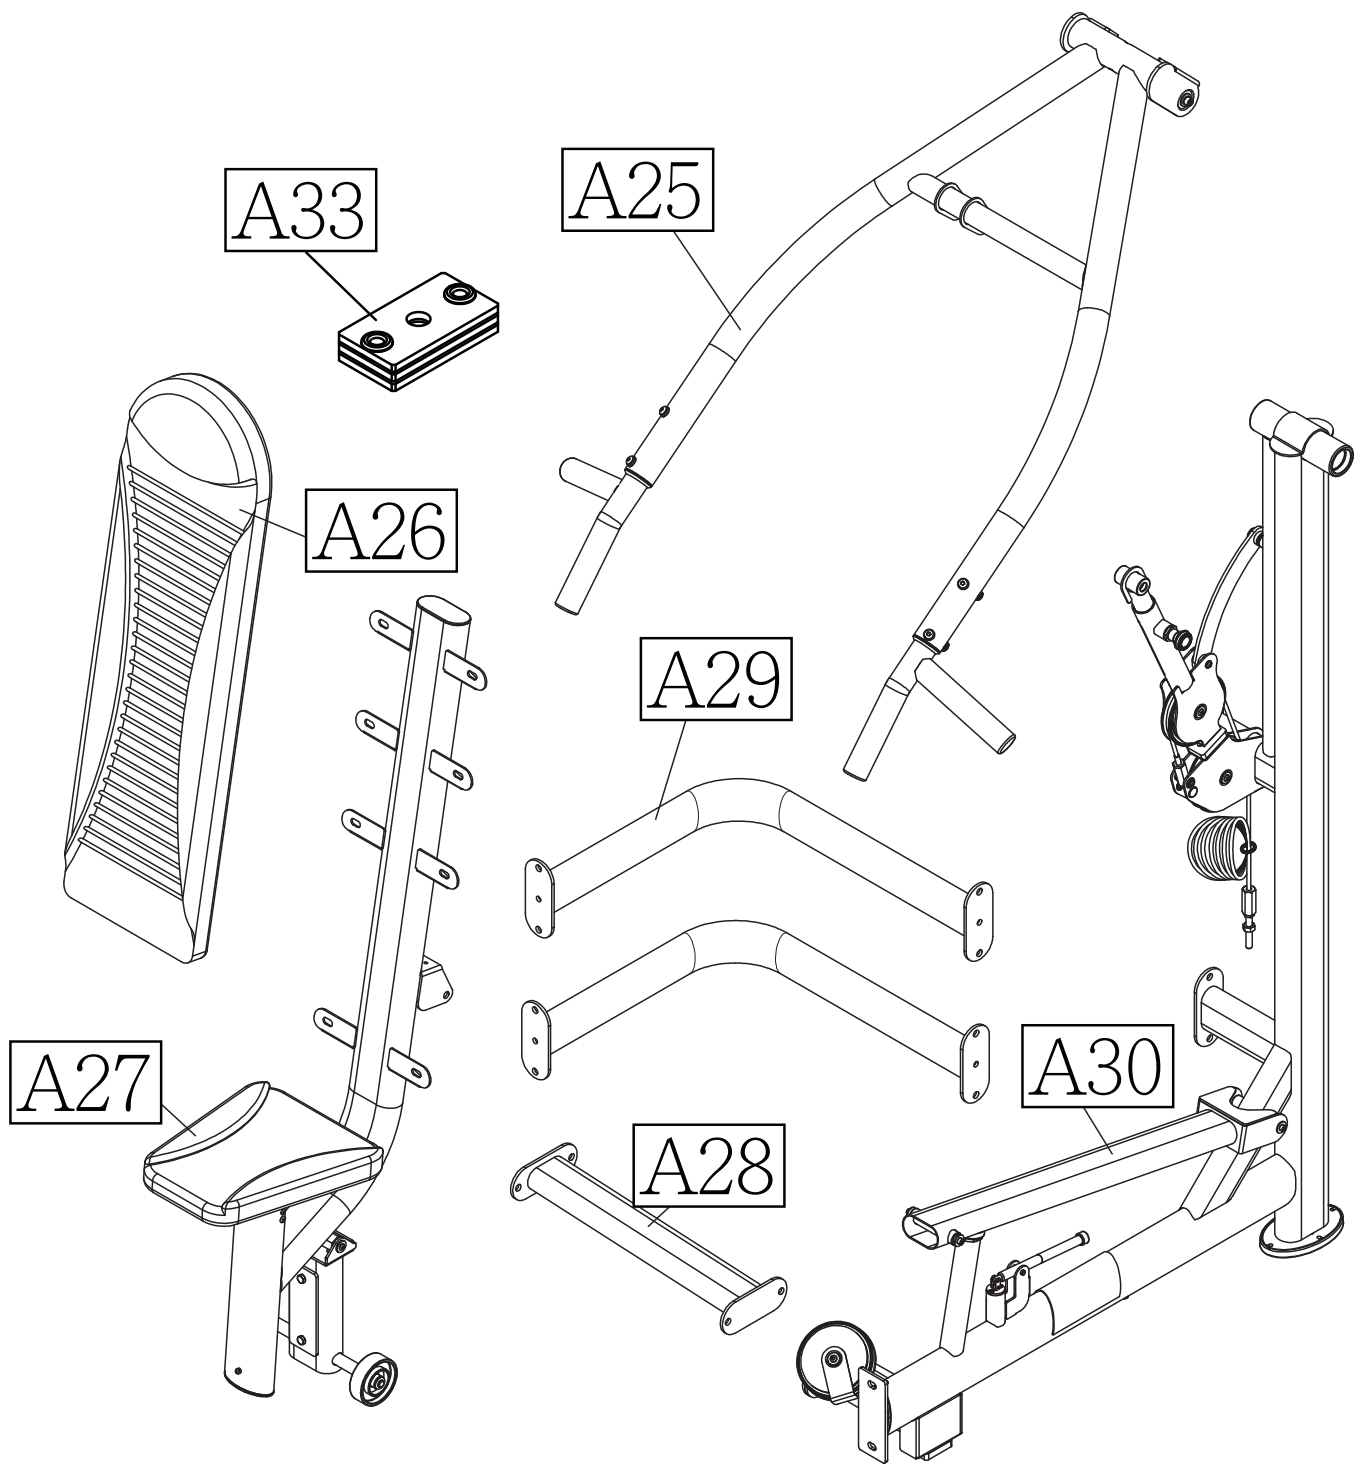

Box C

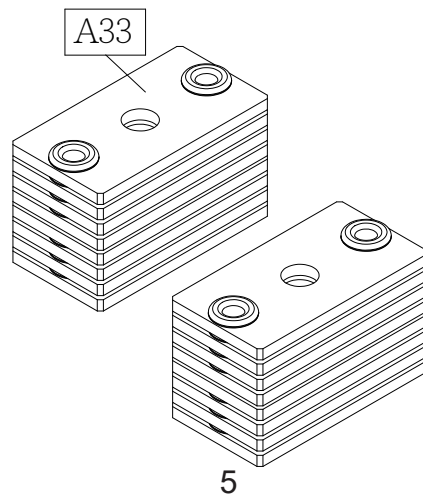

Box A - Main Frame Components

No.	Name	Qty.	No.	Name	Qty.
A1	Left/right perforated boards	2	A10	Cover support plate A	2
A2	Left/right side cover	2	A14	Rear cover	1
A3	Main frame	1	A15	Front cover	1
A4	Cover support plate B-2	1	A16	Bracket	2
A5	Cover support plate B-1	1	A17	Bracket	4
A6	Front cover A	1	A18	Floor fixing bracket	1
A7	Stack fork	1	A19	U bracket	1
A8	Weight stack rod	1	A20	Pulley	2
A9	Cover bracket	5	A34	Weight plate sticker	1
A9-1	Anchor bracket of shroud (square hole)	2	A35	Top cover	1
A9-2	Anchor bracket of shroud (tapped hole)	3	A36	Anchor bracket	2

Box B - User Frame Components

No.	Name	Qty.	No.	Name	Qty.
A25	Press handle	1	A29	Connector B	2
A26	Seat back	1	A30	Secondary frame	1
A27	Seat frame	1	A33	5kg/11lb weight plate	3
A28	Connector A	1			

Box C - Weight Plates Components

No.	Name	Qty.	No.	Name	Qty.
A33	5kg/11lb weight plate	16			

Components in the Hardware Kit

No.	Name	Qty.	Specification	Notes
11	Hex head screw	6	M10*P1.5*L130	
	Spring washer	6	M10	
	Nylon hex lock nut	6	M10	
	Washer	12	D16*d10.2*t1.0	
12	Mushroom top inner hex screw	12	M6*P1.0*L12	
13	Mushroom top Phillips screw	8	M5*L15	
14	Screw socket	1 batch	SGN-07	
15	Mushroom top Phillips screw	10	M5*0.8*L8	
18	Phillips screw	6	M6*P1.0*L12	
19	Flat washer	2	D27*d6.3*t3.0	
	Mushroom top inner hex screw	2	M5*L20	
21	Phillips pan head sheet metal screw	6	M4*L12	
22	Phillips Umbrella head sheet metal screws	2	M4*L14	
23	Round screw cap	2		
24	Fastener	1batch		
	Cap nut	1batch		

Components on the Product

No.	Name	Specification	Notes
51	Hex head screw	M10*P1.5*L75	
	Spring washer	M10	
	Bushing	ØD16*t2.0*L45.5	
	Washer	D16*d10.2*t1.0	
	Nylon hex lock nut	M10	
52	Upper stack carriage set		
53	Nylon hex lock nut	M8	
	PU tube	ØD12*d8*L51	
	Flat Washer	D17*d8.3*t2	
	Hex head screw	M8*P1.25*L65	
54	Nylon hex lock nut	M8	
	PU tube	ØD12*d8*L82	
	Flat Washer	D17*d8.3*t2	
	Hex head screw	M8*P1.25*L65	
55	Guide rod		
56	Inner hex screw	M8*P1.25*L18	
	Spring washer	M8*t2.0	
	Flat Washer	D17*d8*t1.5	


Components on the Product			
No.	Name	Specification	Notes
57	Axle E	ØD20*L197	
	Flat washer	D26*d8.5*t2	
	Spring washer	M8	
	Inner hex screw	M8*P1.25*L20	
58	Nylon hex lock nut	M8	
	Flat washer	D17*d8.3*t1	
	Axle	ØD11.7*L61	
59	Washer	Ø16*Ø10.2	
	Nylon hex lock nut	M10	
	Connecting board		
60	Flat washer	Ø20*Ø 6.3	
	Inner hex screw	M6*L30	
	Bushing		
61	Flat washer	Ø17*Ø8.3	
	Spring washer	M8	
	Mushroom top inner hex screw	M8*L25	
62	Mushroom top inner hex screw	M6*P1.0*L12	
	Spring washer	M6	
	Flat washer	D20*d6.3*t1.5	
	Axle	ØD15*L26	
63	Set fork		
64	Nylon hex lock nut	M6*P1.0*6	
	Flat washer	D20*d6.3*t1.5	
	Axle	ØD8*L54.5	
	Bushing	ØD12*d8*L7	
65	Soft cap	ØD14	
66	Mushroom top Phillips screw	M5*0.8*L15	
	Flat washer	D13*d6*t1.0	
67	Spring washer	M6	
	Flat washer	D20*d6.3*t1.5	
	Mushroom top inner hex screw	M6*P1.0*L12	
68	Inner hex screw	M5*P0.8*L10	
69	Set fork		
70	Bolt assy. crossover		
71	Cover		
72	Flat washer	D20*d6.3*t1.5	
	Spring washer	M6	
	Mushroom top inner hex screw	M6*P1.0*L12	

Components on the Product			
No.	Name	Specification	Notes
73	Pulley cover		
74	Pulley	ØD126*20	
75	Axle	ØD15*L26	
	Flat washer	D20*d6.3*t1.5	
	Spring washer	M6	
	Mushroom top inner hex screw	M6*P1.0*L12	
80	Reinforcement plate		
	Anchor bracket		
	Umbrella hex screw	M6*P1.0*L20	
	Plastic cover		
81	Umbrella hex screw	M6*P1.0*L12	

4. ASSEMBLE THE PRODUCT

Follow instructions below to assemble this product. Note that in this manual the words “left” and “right” are used to refer to the product and its parts. As such, these designations correspond to the “left” and “right” sides of a person in position to exercise on this product. Also, for brevity, the word “screws” or “nuts” is used where washers and other hardware may be involved.


STEP 1 Connector Installation

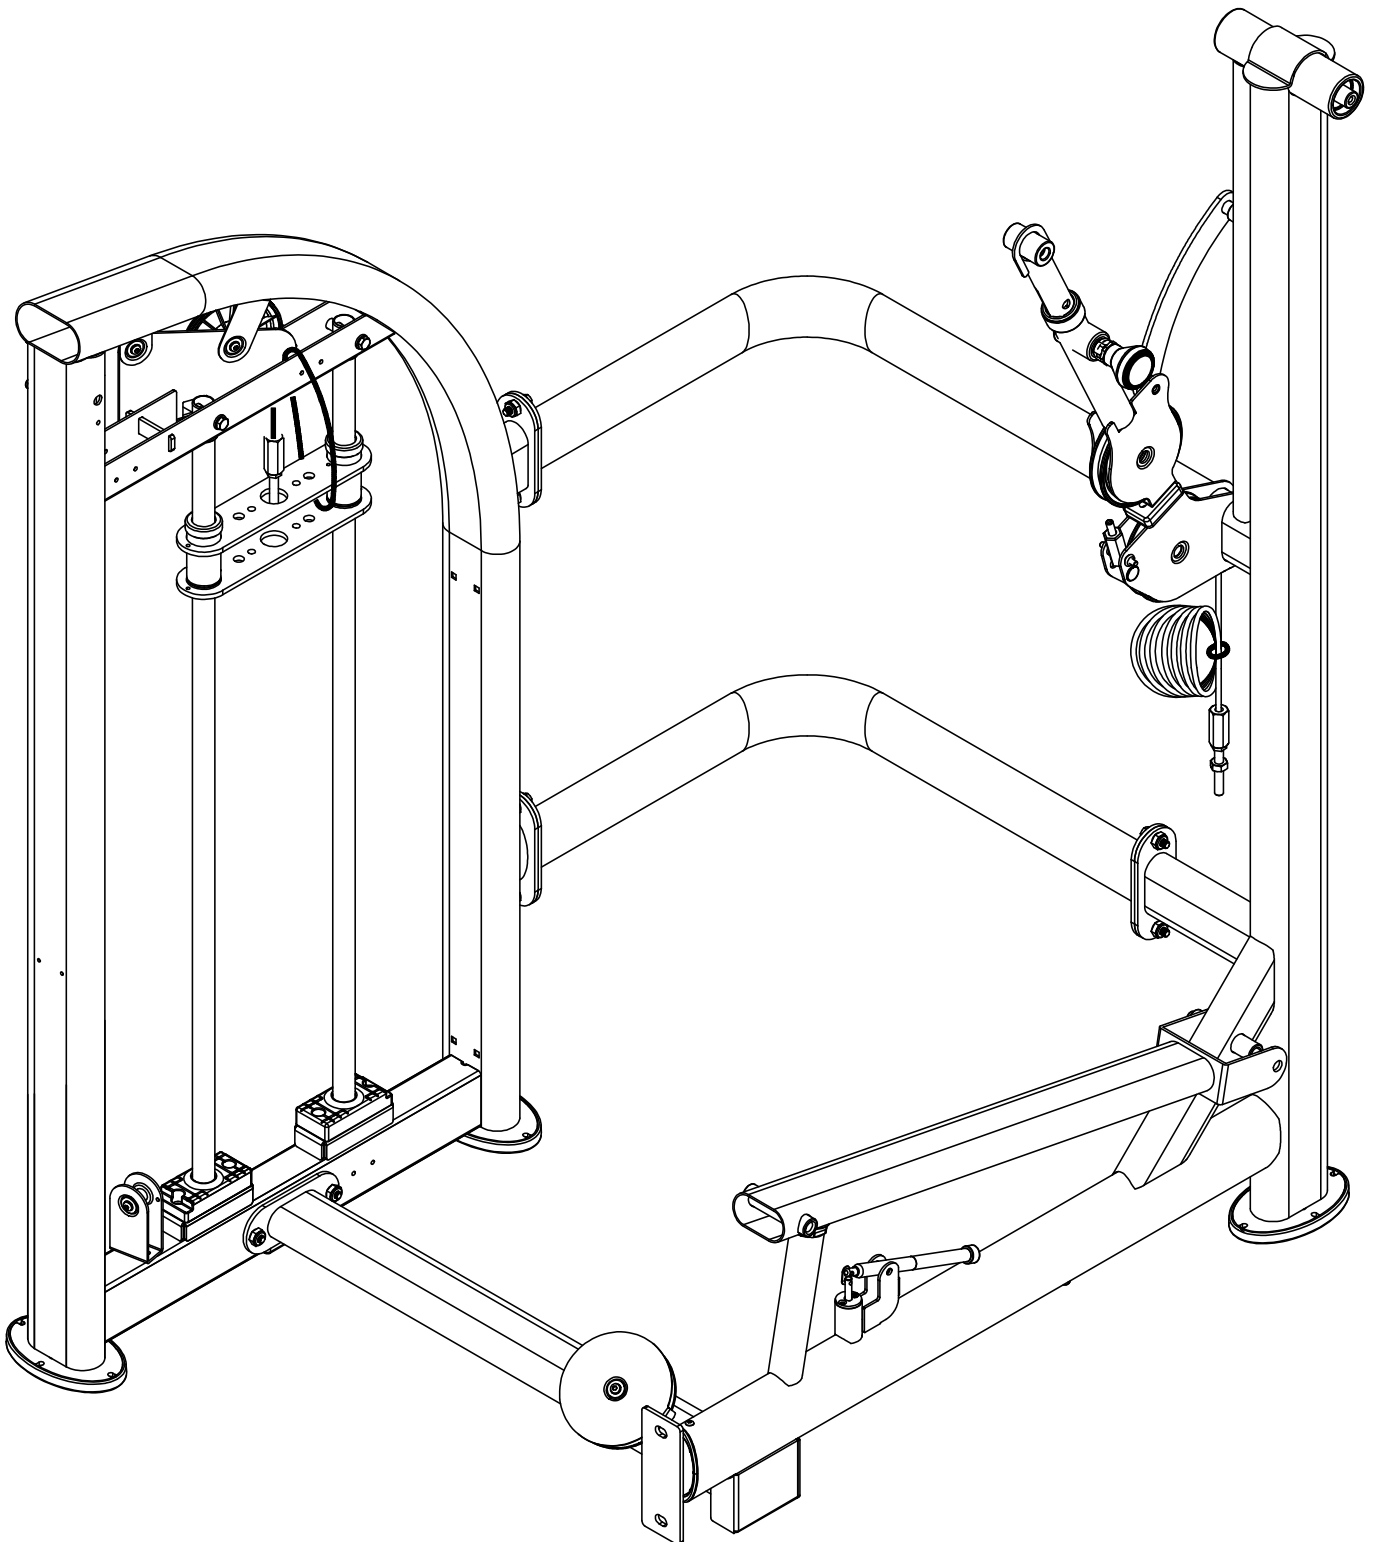


STEP 1 Connector Installation (CONT.)

Before assembling, remove screws (51) from the main frame (A3) as shown. Use connector A (A28) and connector B (A29) to connect the main frame (A3) to the secondary frame (A30) and then use screws (11) (51) loosely secure these pieces. Do not tighten screws yet.

Set the unit flat on the floor. First secure screws (51) on the main frame (A3) and then secure screws (11) on the secondary frame (A30).

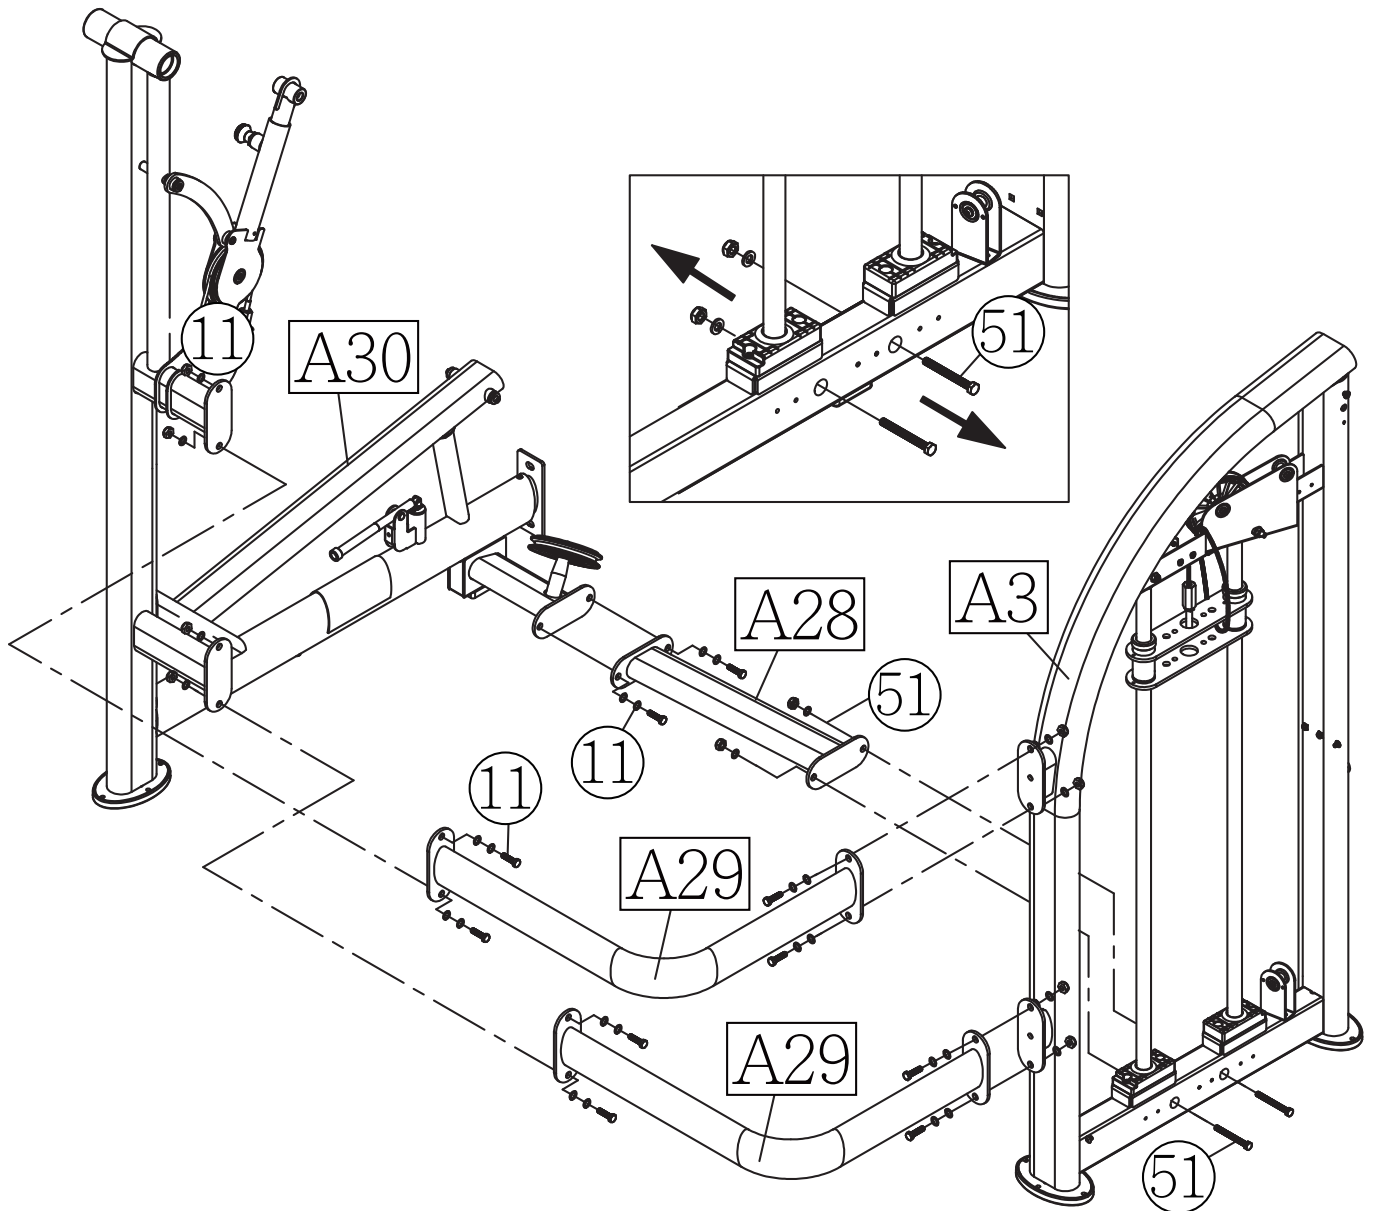

STEP 2 Cover Support Plate Installation

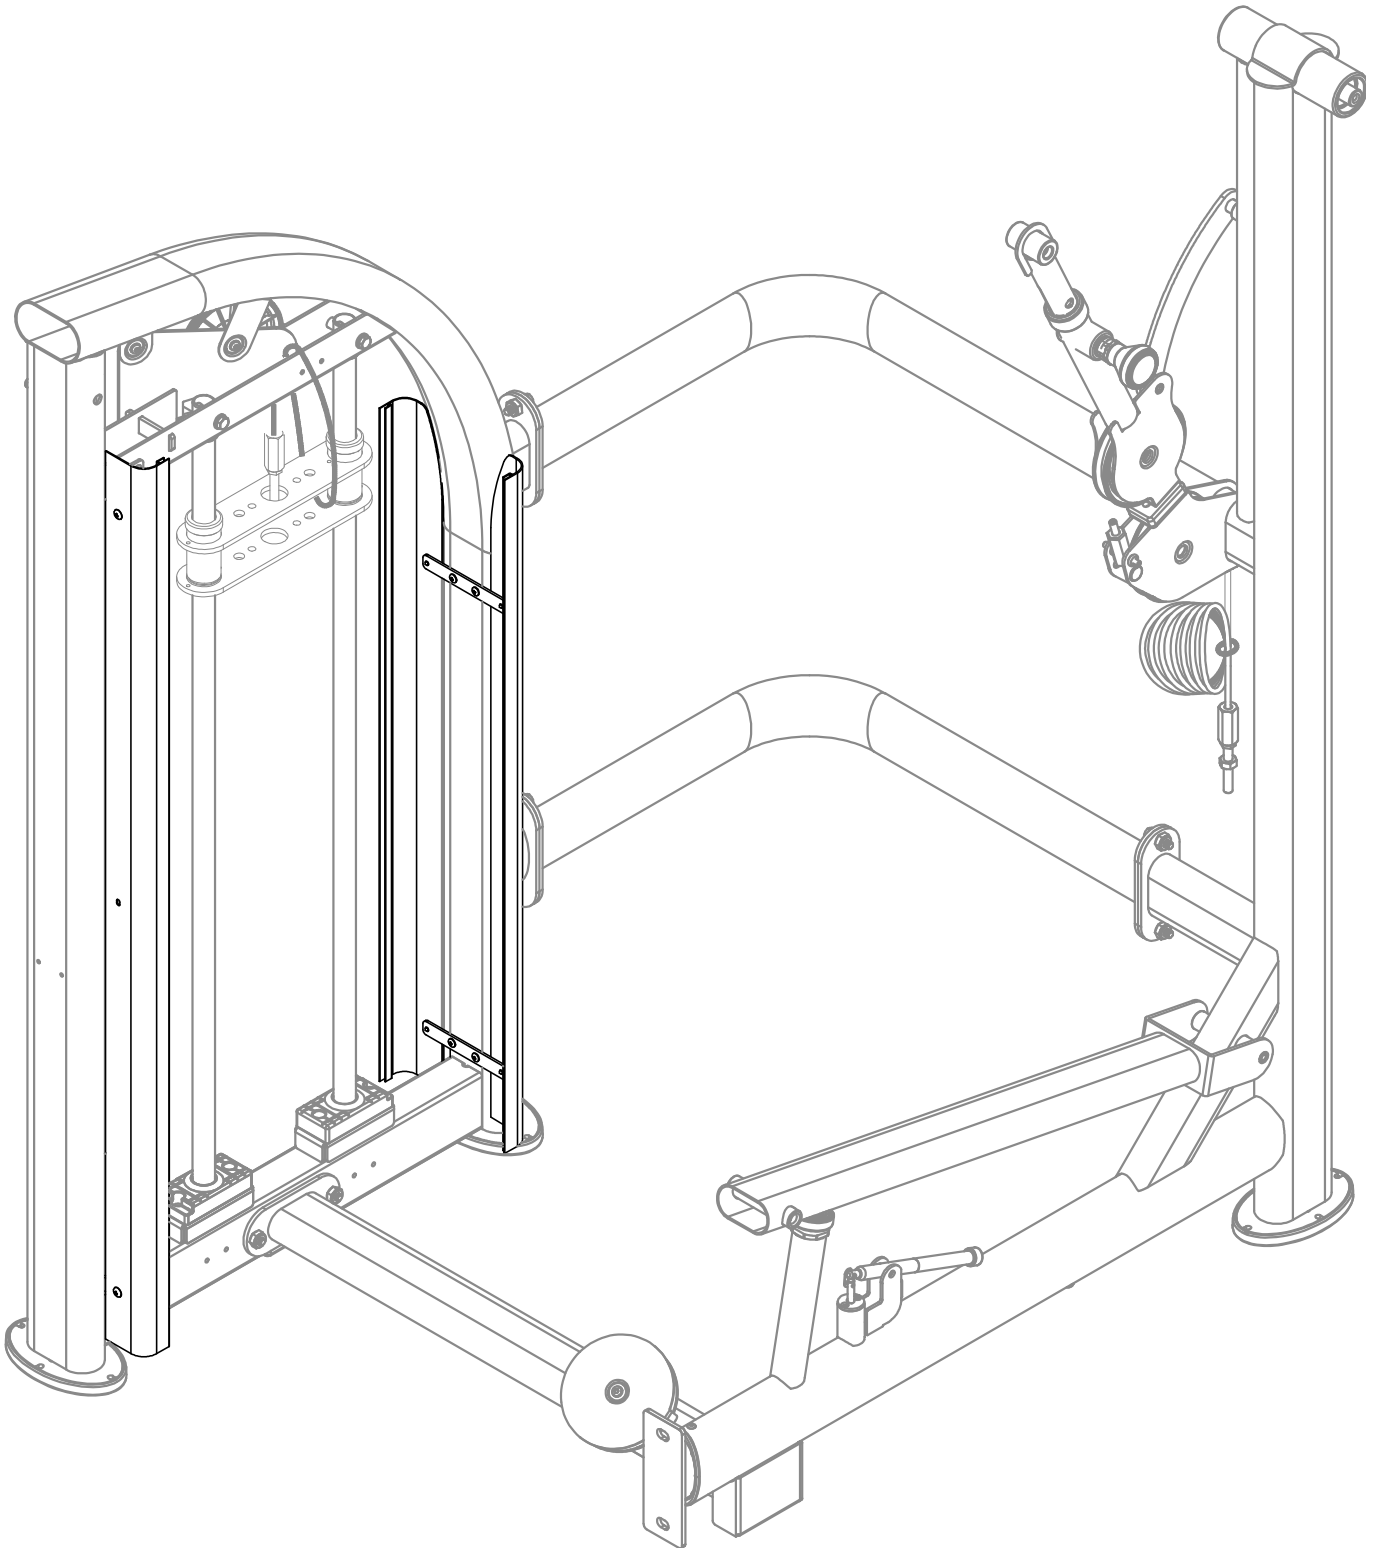


STEP 2 Cover Support Plate Installation (CONT.)

(a) Insert the screw sockets (14) into place in the main frame (A3) as shown, and then use screws (12) (13) to secure the brackets (A16) (A17) in place.

(Note: The bracket (A16) must be secured to the top of main frame as shown.)


(Note: Remove the pulley before securing the bracket (A17). Once completed, install the pulley back into place.)

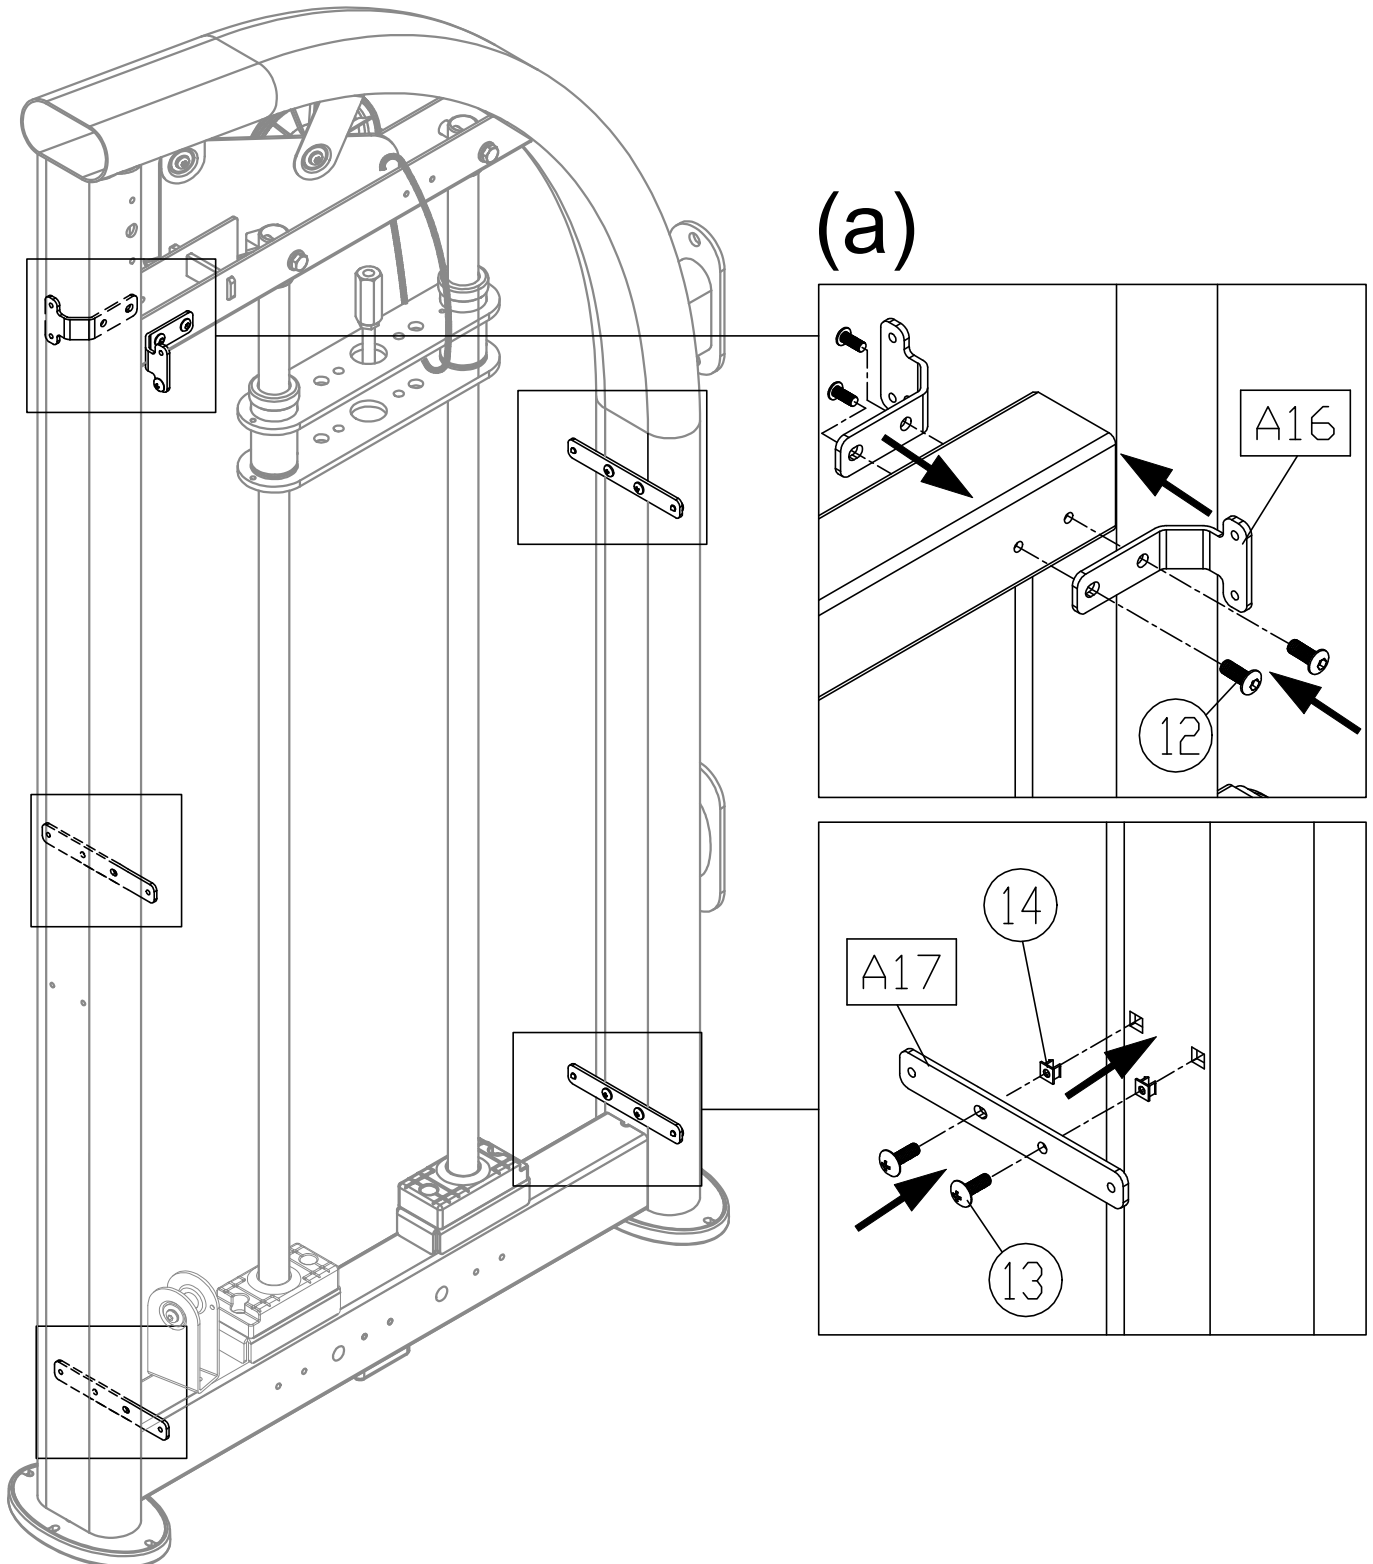


STEP 2 Cover Support Plate Installation (CONT.)

(b) Secure the plate slots (A10) to the straight frame of the weight stack tower (A3) with the screws (15) and then cover the cap nuts (60). The plate slots (A4, A5) are secured to the left and right side of the curved frame, respectively.

(Note: The plate slots have to be secured outside of the anchor brackets (A16, A17).)

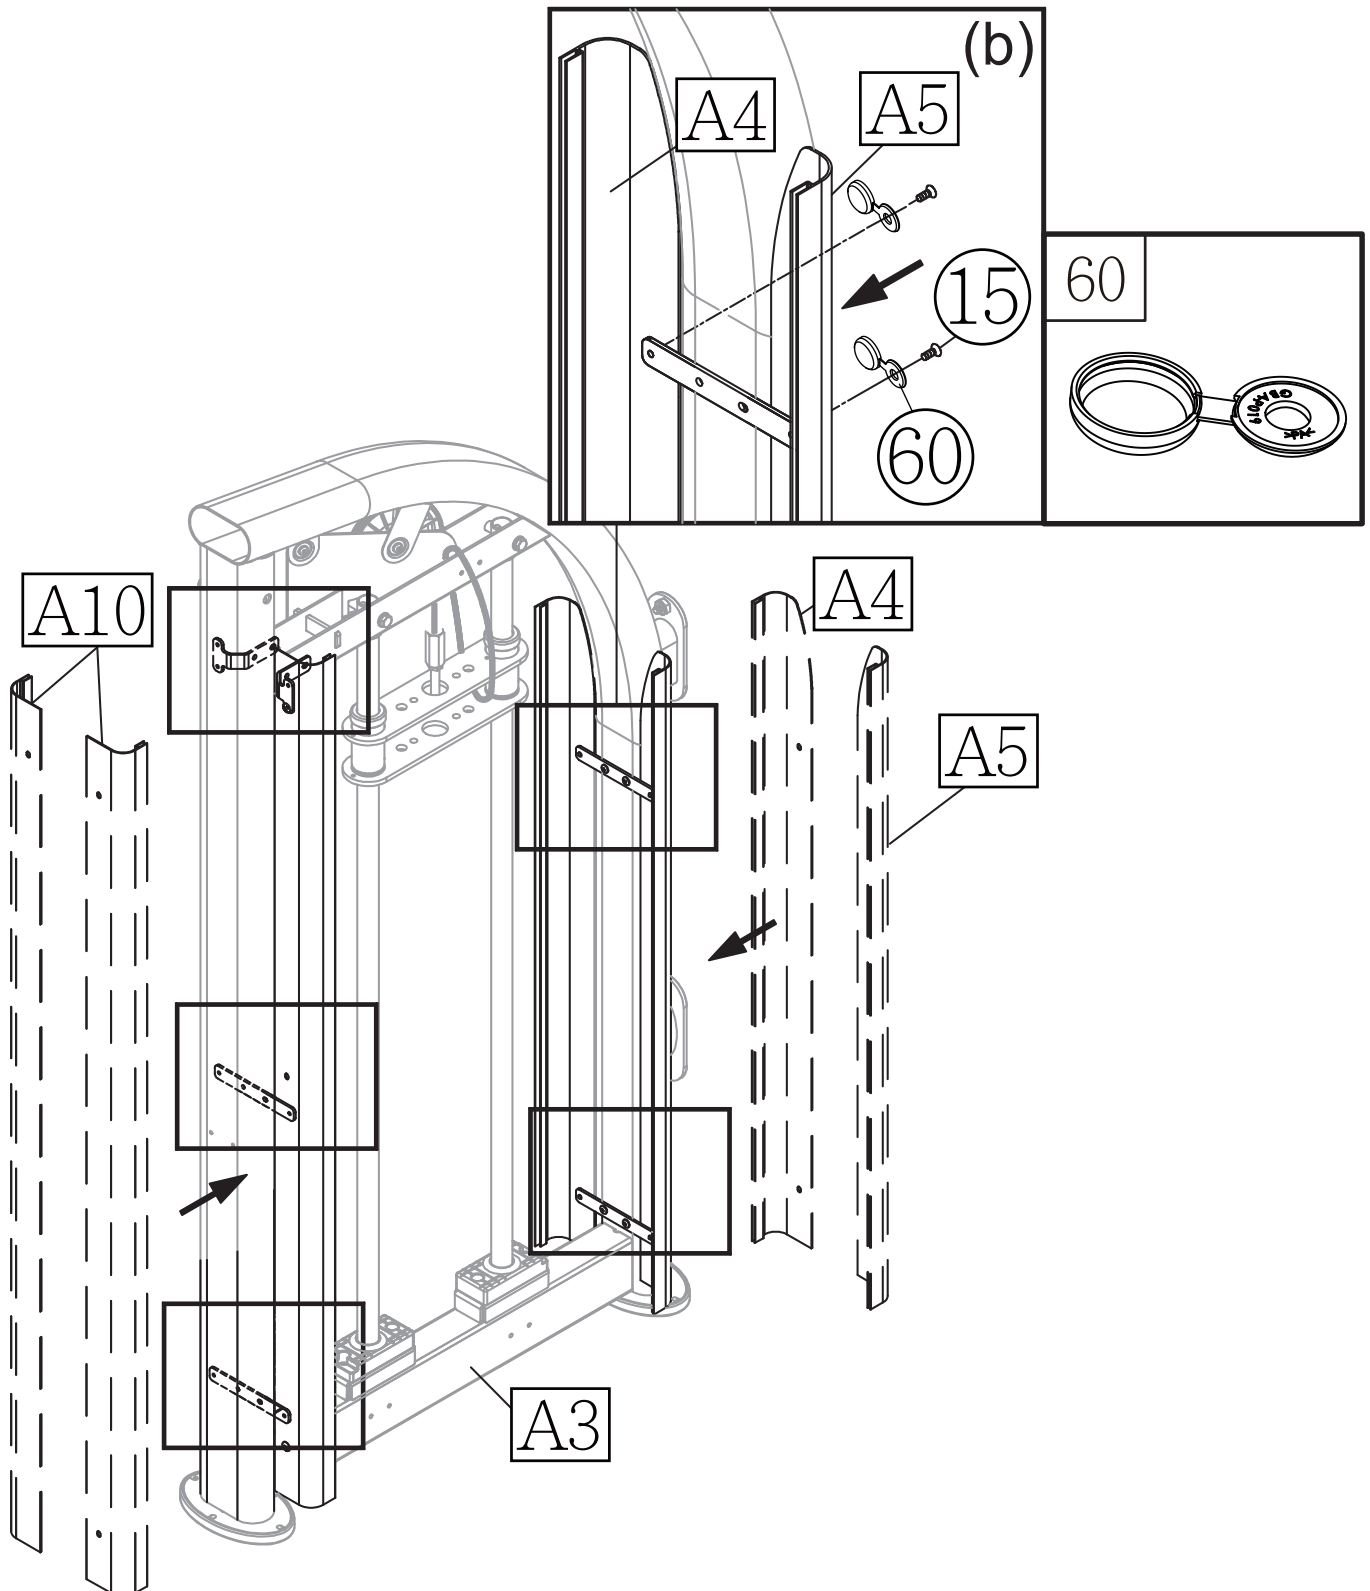

STEP 3 Weight Stack Installation

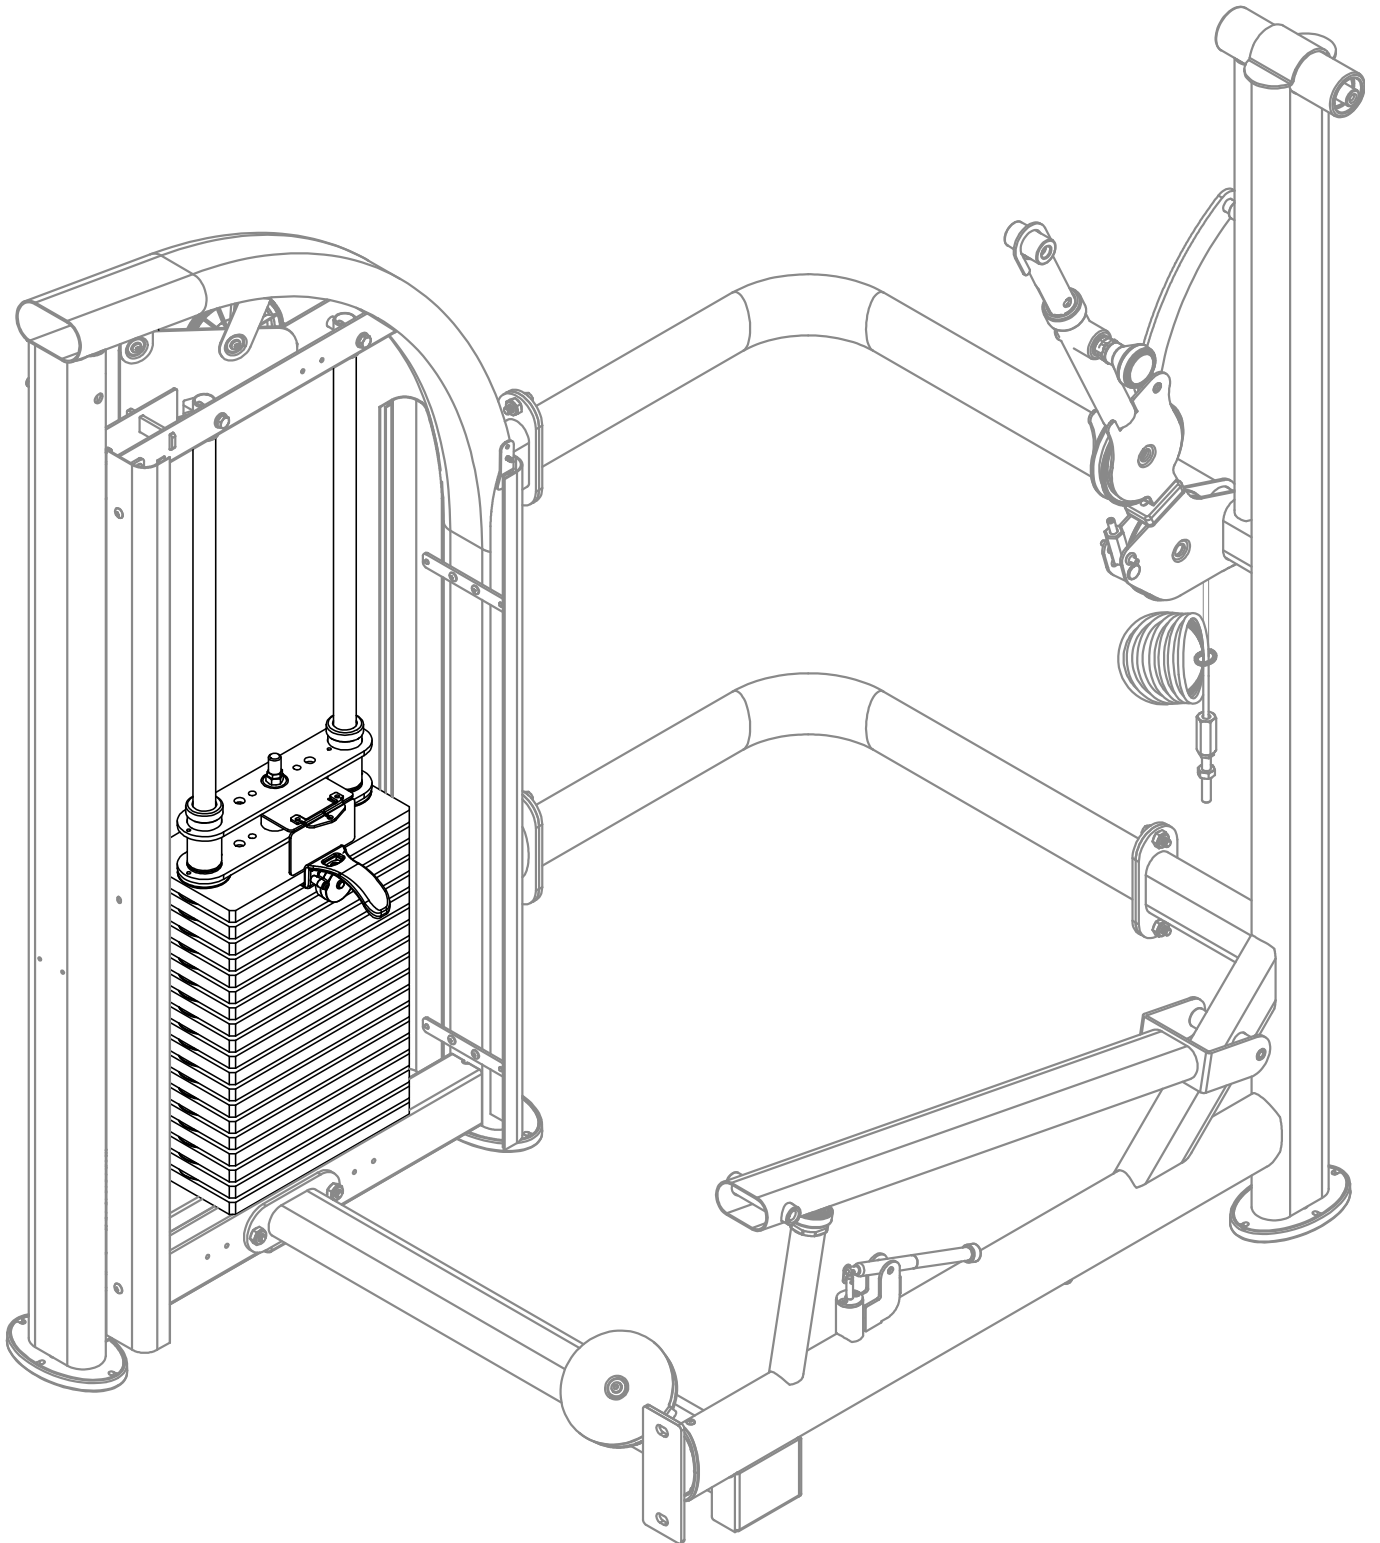




STEP 3 Weight Stack Installation (CONT.)

Follow instructions (a) through (g) to install the weight stack.

(a) Hold the upper stack carriage set (52), and then cut the zip tie. Gently lower the upper stack carriage set (52) into place as shown.

(b) Remove screws (53) (54). Set the guide rod (55) downward into place as shown.

(c) Tilt the guide rod (55) backward and then lift the upper stack carriage set (52) off the guide rods as shown. Carefully set the upper stack carriage set (52) aside.

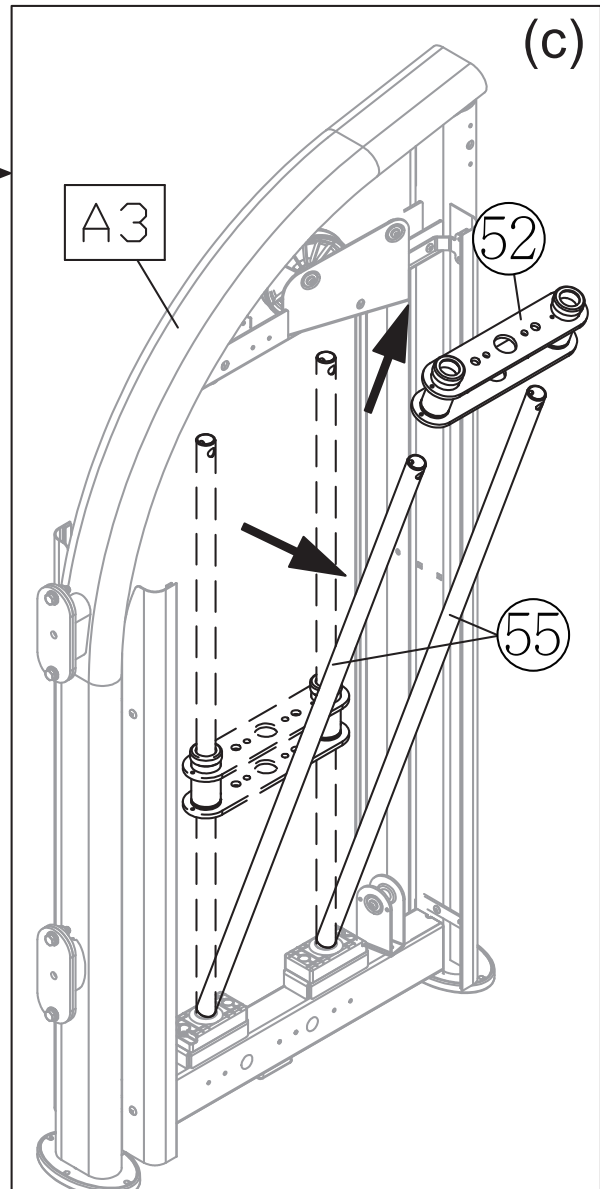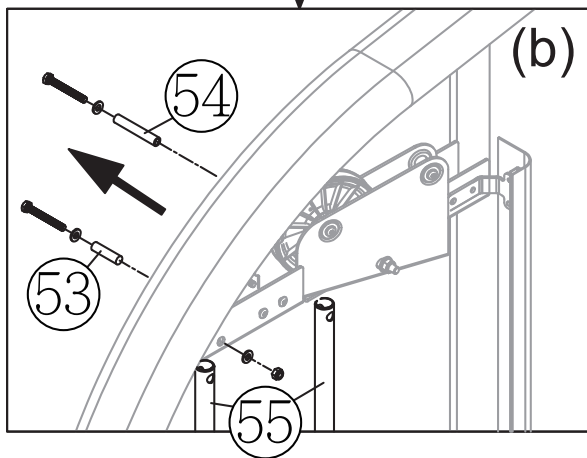
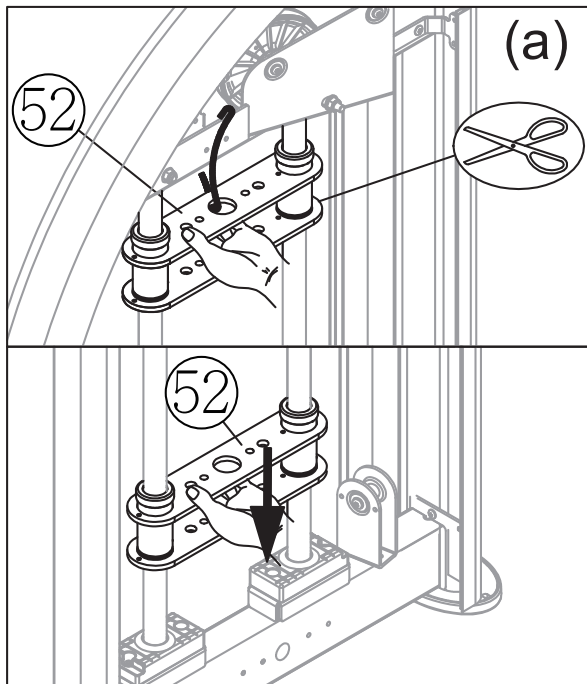


STEP 3 Weight Stack Installation (CONT.)

(d) Remove screws (56) from the stack fork (A7) and insert the weight stack rod (A8) into the central mounting position of the upper stack carriage set (52). Use screws (56) to secure the stack fork (A7) into place of the upper stack carriage set (52) as shown.

(Note: Remove the stack fork first before assembling.)

(e) Remove screws (68) from the set fork (69) to remove the bolt assy. crossover (70). Pull the cable from the stack fork (A7) to thread through the bolt assy. crossover (70) as shown. Secure the bolt assy. crossover (70) back into place of the set fork (69) with screws (68) as shown.

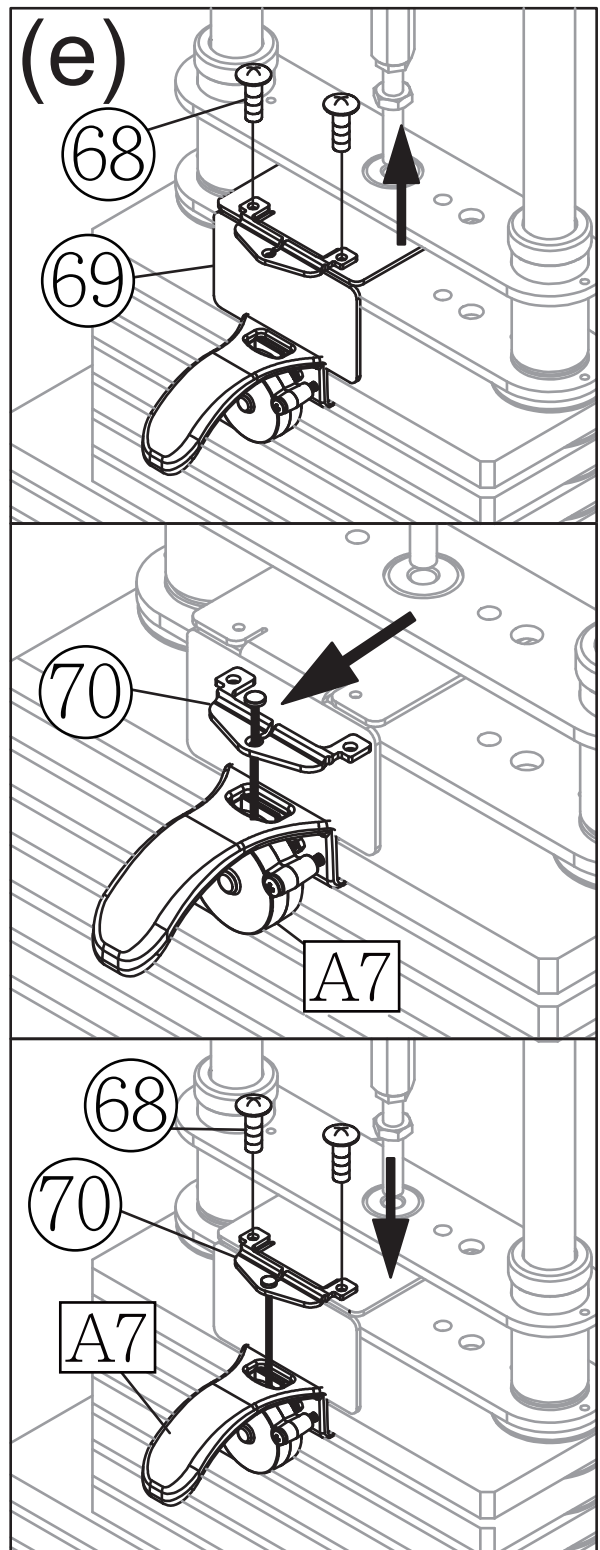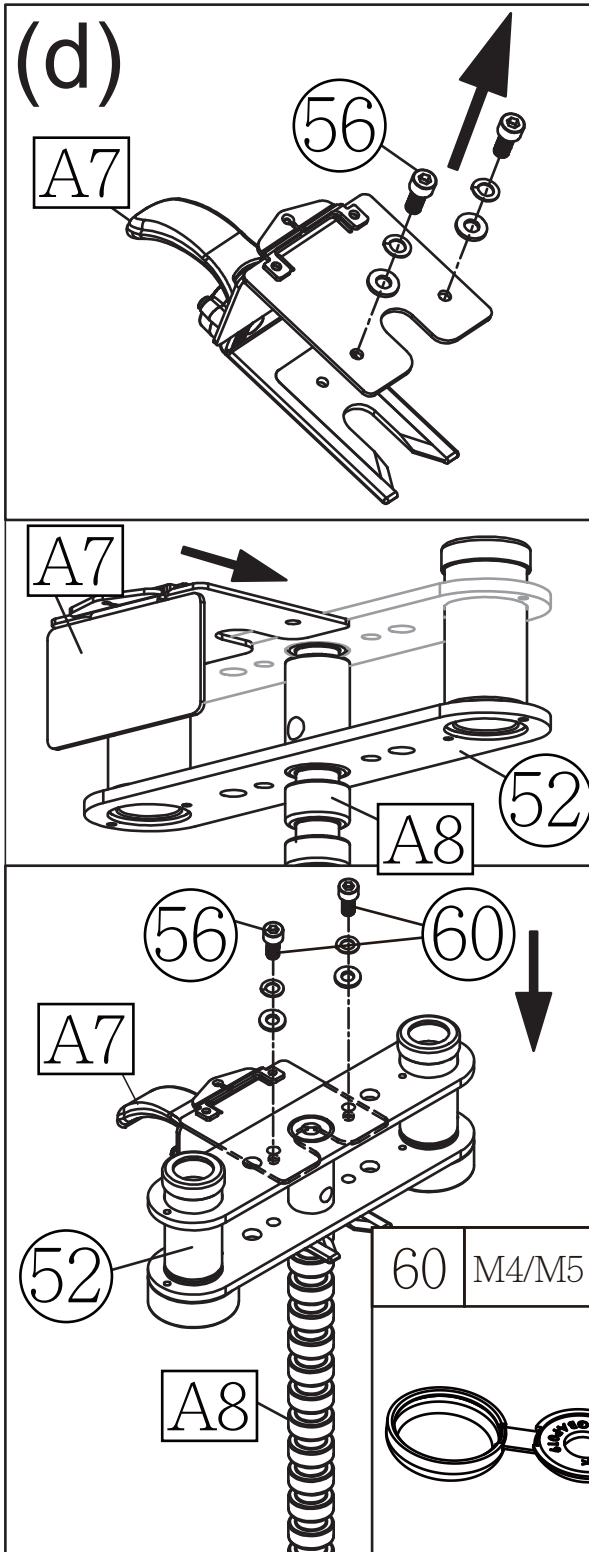


STEP 3 Weight Stack Installation (CONT.)

(f) Insert and lower the (5 kg/11lb) weight plate (A33) into place on the guide rods (55) one at a time. Once complete, slide down the upper stack carriage set (52) on top of the weight stack. *(Note: The convex side of weight plate should face up and the stack fork (A7) points toward the front.)*

*If there is an optional (7.5kg/16.5lb) weight plate installed, insert the optional weight plates before the (5 kg/11lb) weight plates (A30).

(g) Tilt the guide rods (55) back into place and then lift them up to their mounting position, and then secure the assembly with screws (53) (54).

*Install the cap nuts on the screws

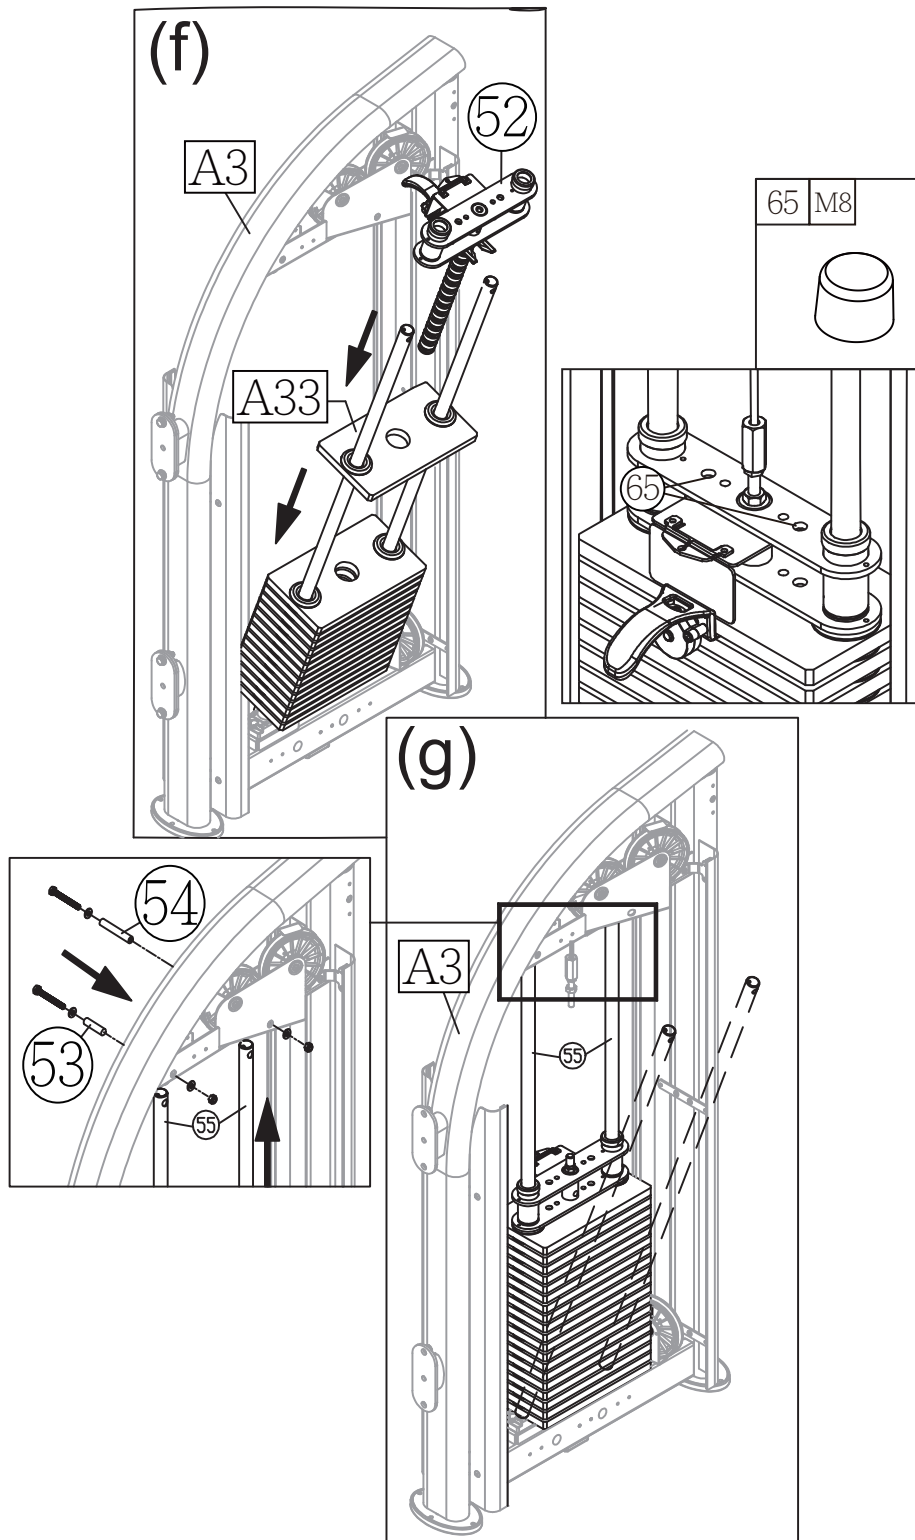


STEP 4 Apply the Weight Stack Sticker

Note: Before applying weight plate stickers, please wipe the area clean, and clean your hands before proceeding to the next step.




- (a) Align and tape the cardboard to the upper left corner of the weight plate (A30).
 - (b) Peel off the top half of the weight plate sticker (A31) backing. Leave the clear outside margin in place on the sticker. Don't peel off the margin.
 - (c) Press the numbered part of the weight plate sticker (A31) in place while you peel off the clear margin of the sticker.
 - (d) Peel off the clear margin of the sticker.
 - (e) Follow steps (b) ~ (d) to apply another weight plate sticker to the lower part of the weight stack.
- When the stickers are in place, peel off the cardboard. Press the sticker in place to ensure good contact on the weight plate.

*If there are additional optional weight plates, use the optional weight plate stickers.

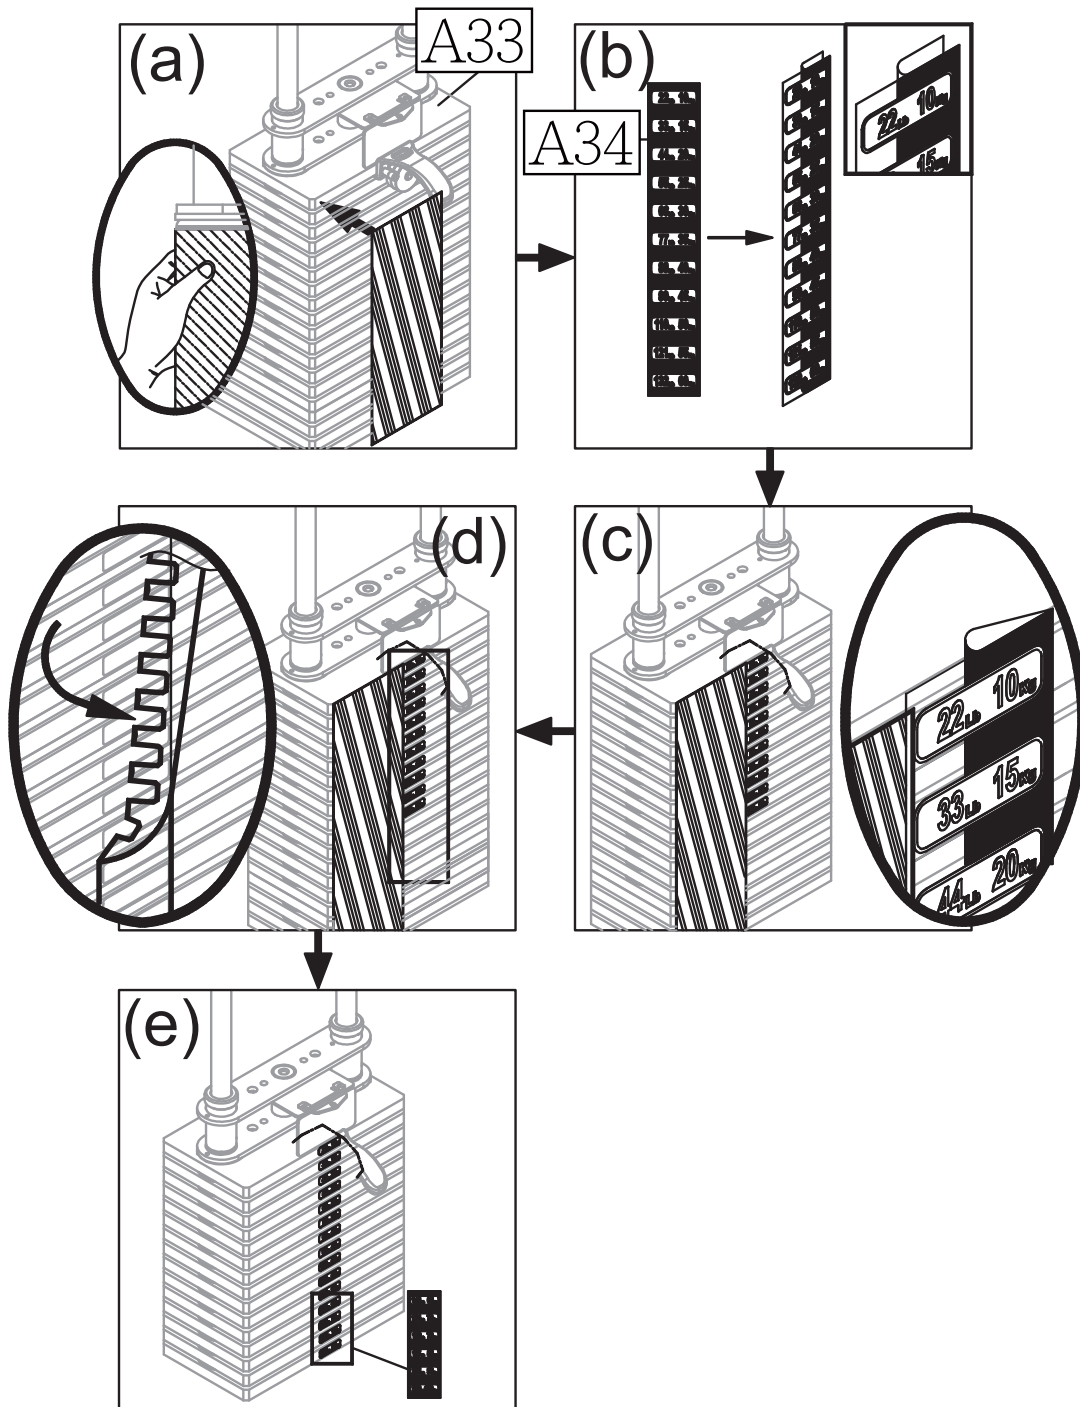


STEP 5 Press Handle Installation

- (a) First, remove the axle and screws (58) (57) from the press handle (A25) and the secondary frame (A30). Carefully set each piece aside.
- (b) Attach the press handle (A25) to the secondary frame (A30) via the axle and then loosely secure these pieces with screws (57). Do not tighten screws yet. And then secure the axle with screws (58). Finally, fully secure all screws (57) (58) as shown.

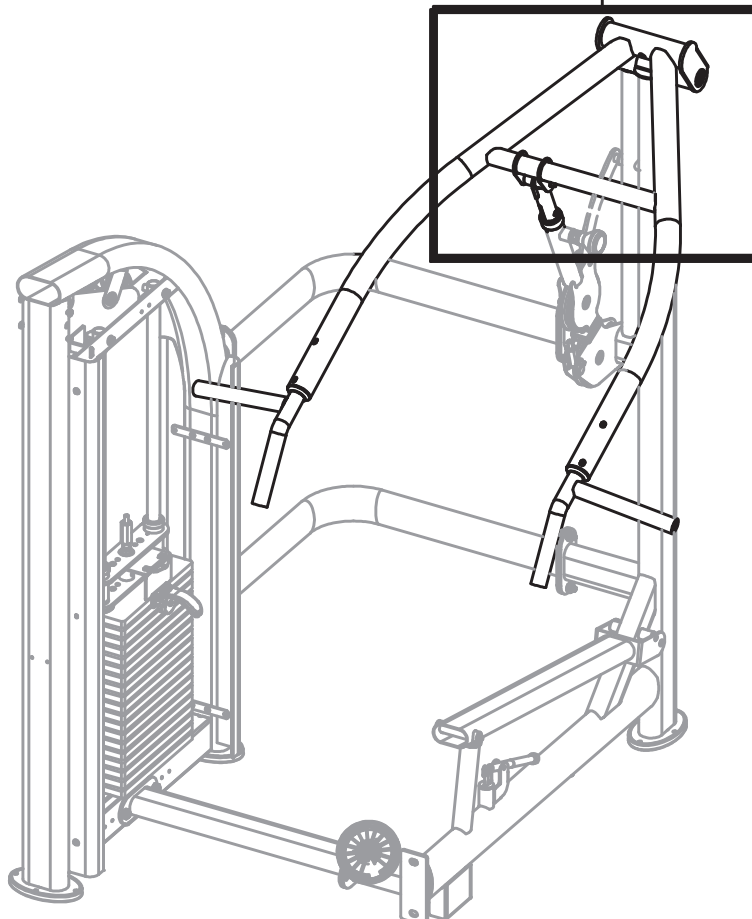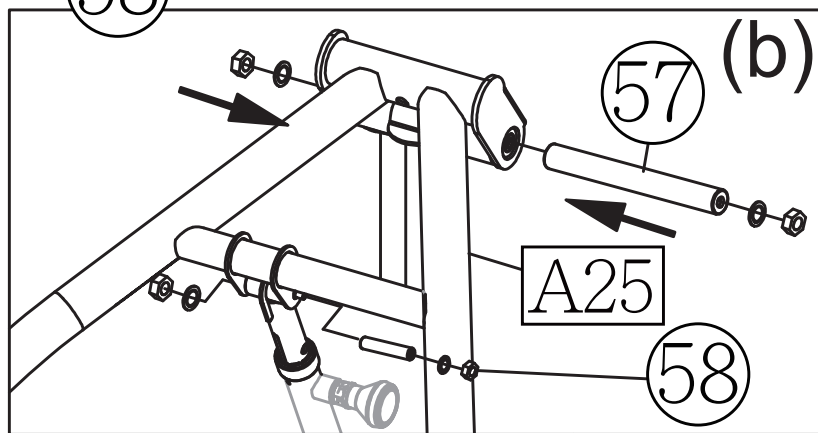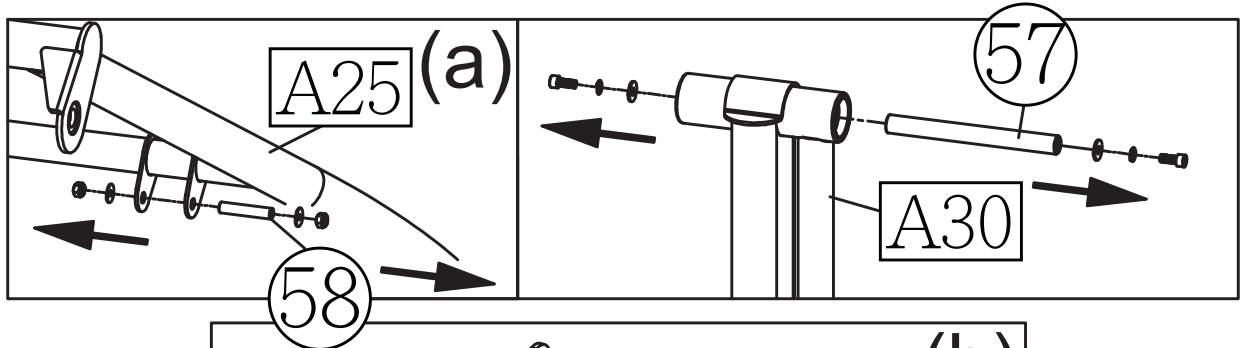


STEP 6 Seat Frame Installation

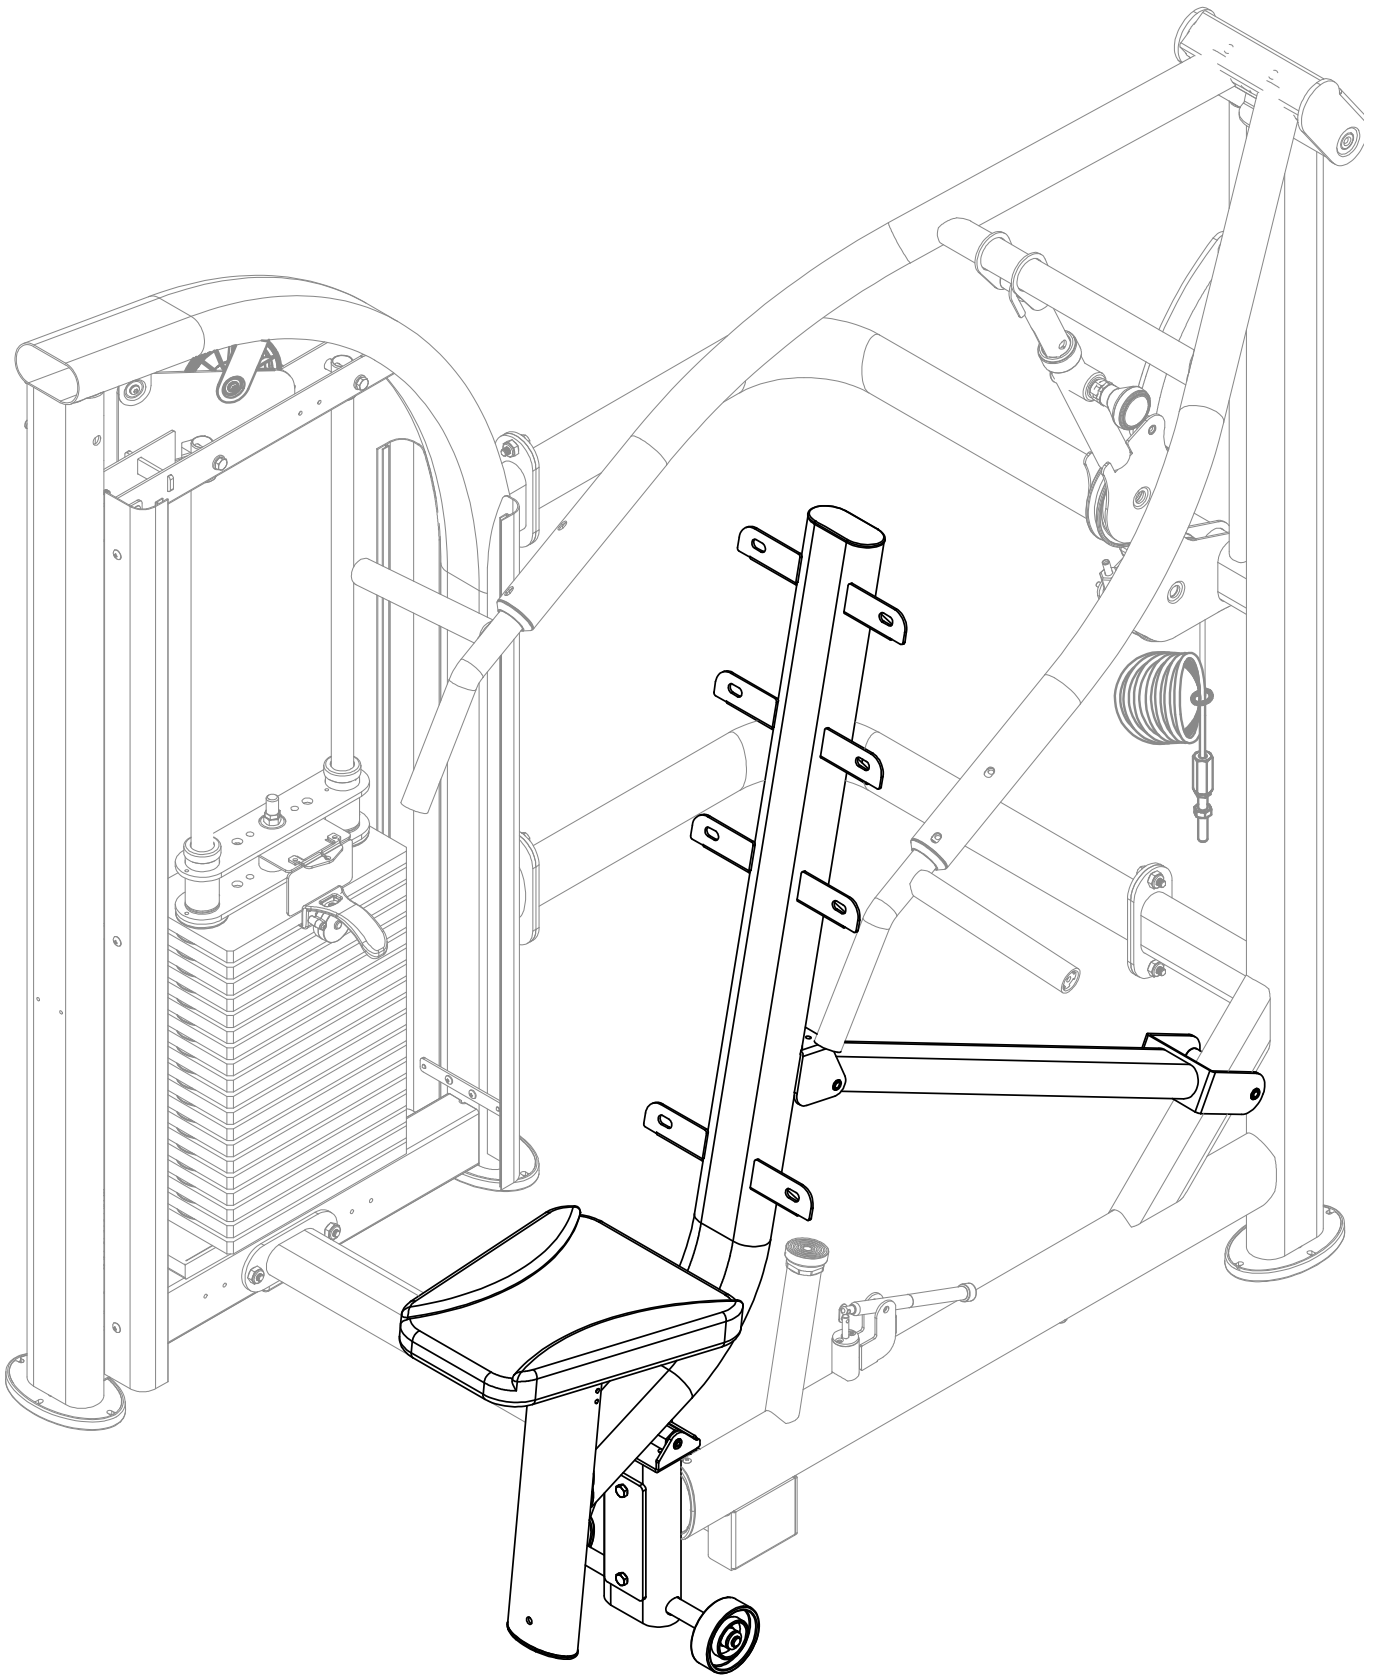



STEP 6 Seat Frame Installation (CONT.)

(a) First, remove the connecting board (59) and screws (60) from the seat frame (A27) and the secondary frame (A30). Carefully set each piece aside.

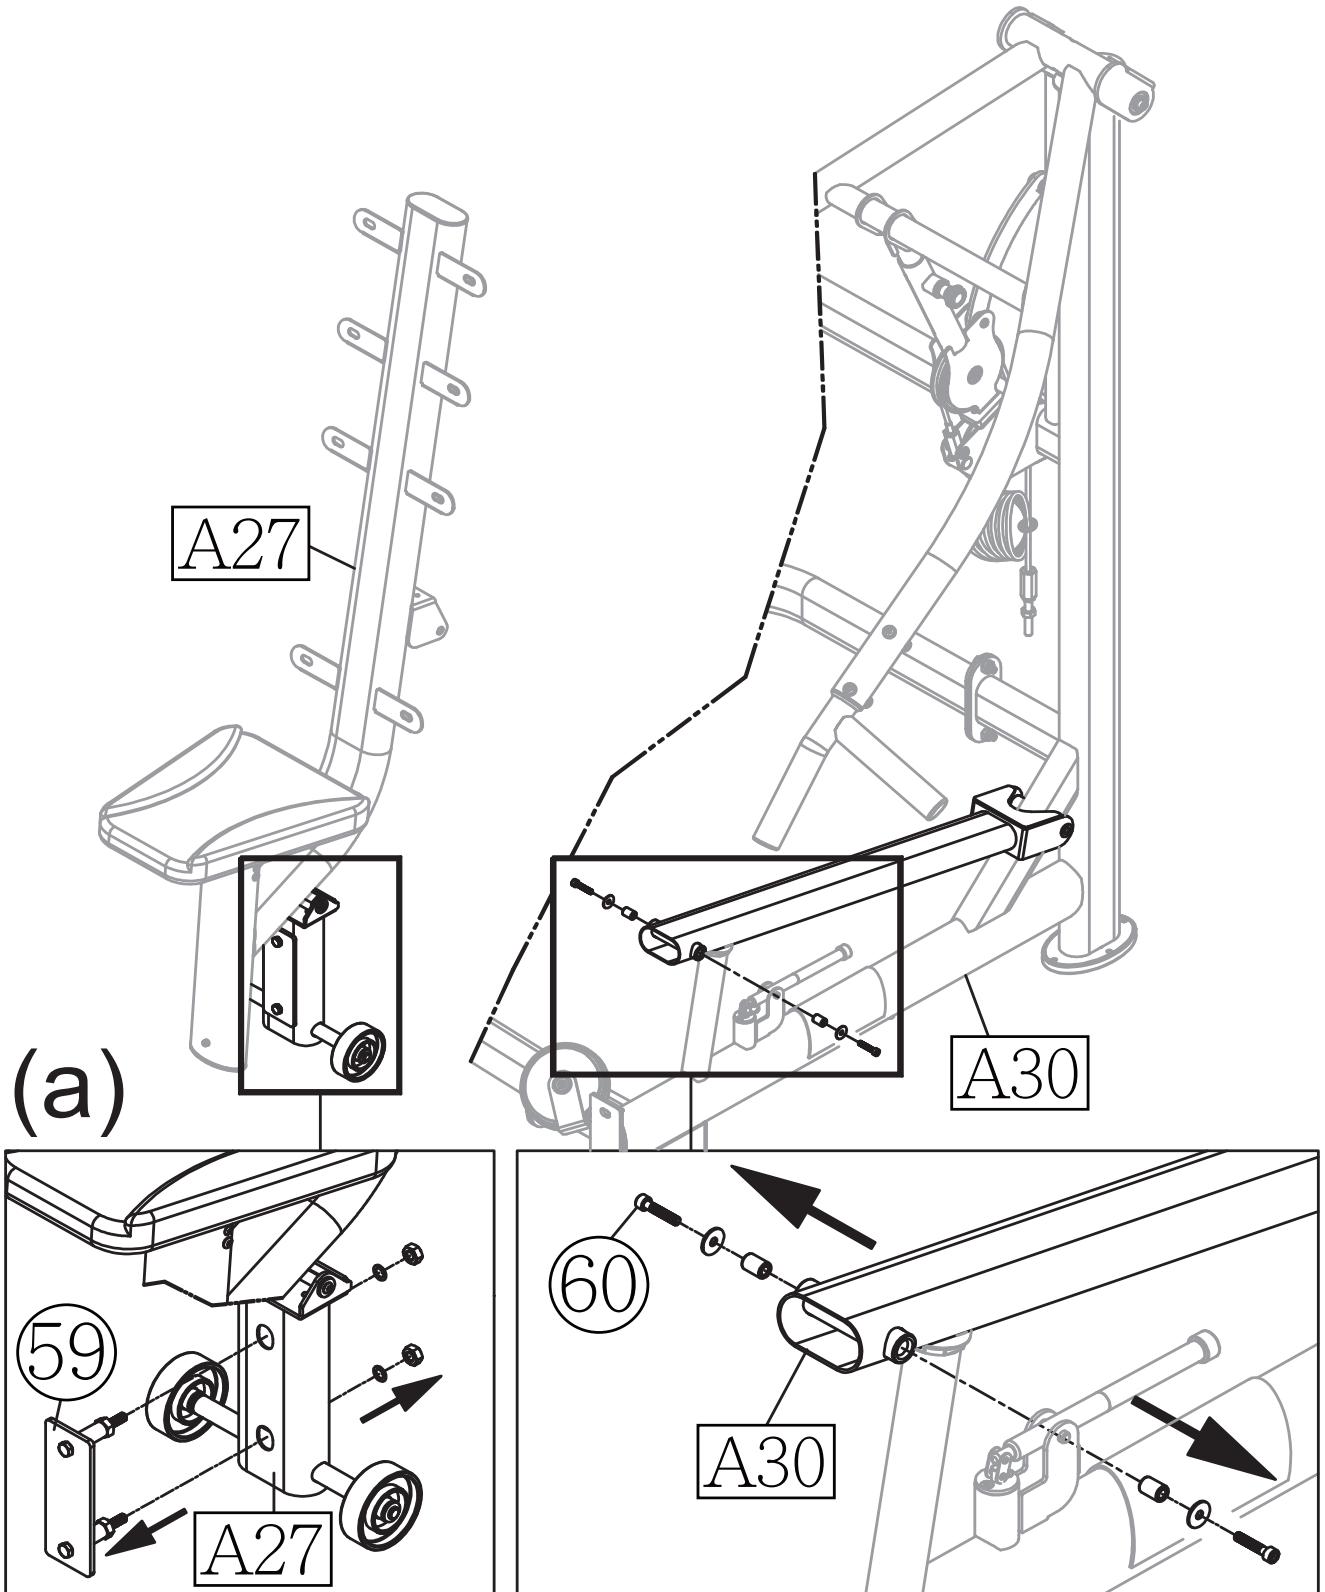


STEP 6 Seat Frame Installation (CONT.)

- (b) Use the connecting board (59) and screws (60) to secure the seat frame (A27) to the secondary frame (A30) and then raise the connector A on the secondary frame (A30) to match holes in the seat frame (A27) and then loosely secure them with screws (60) as shown. Finally, fully secure all screws.

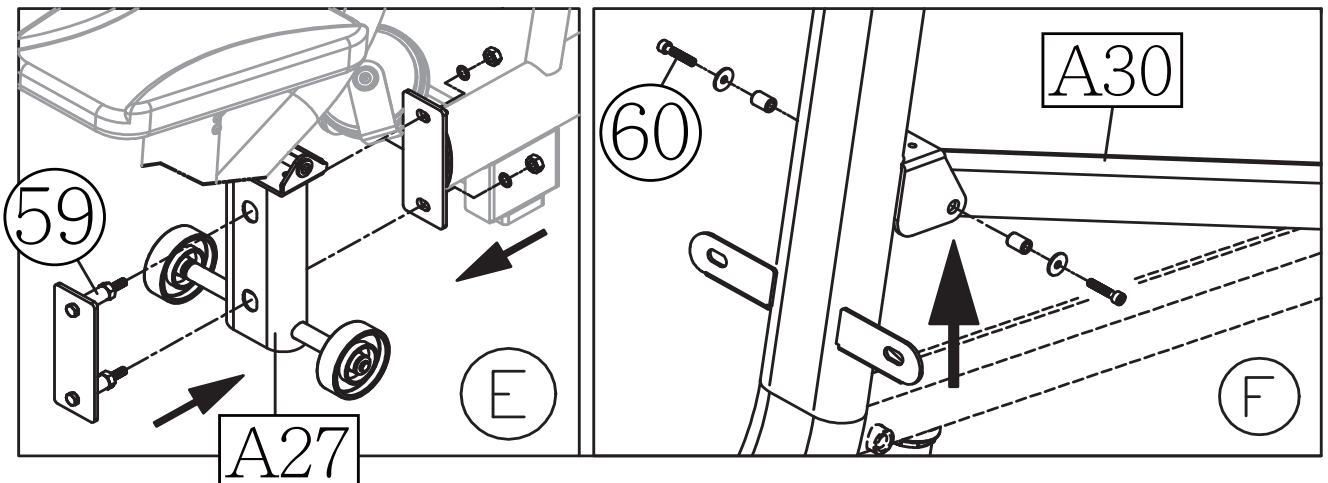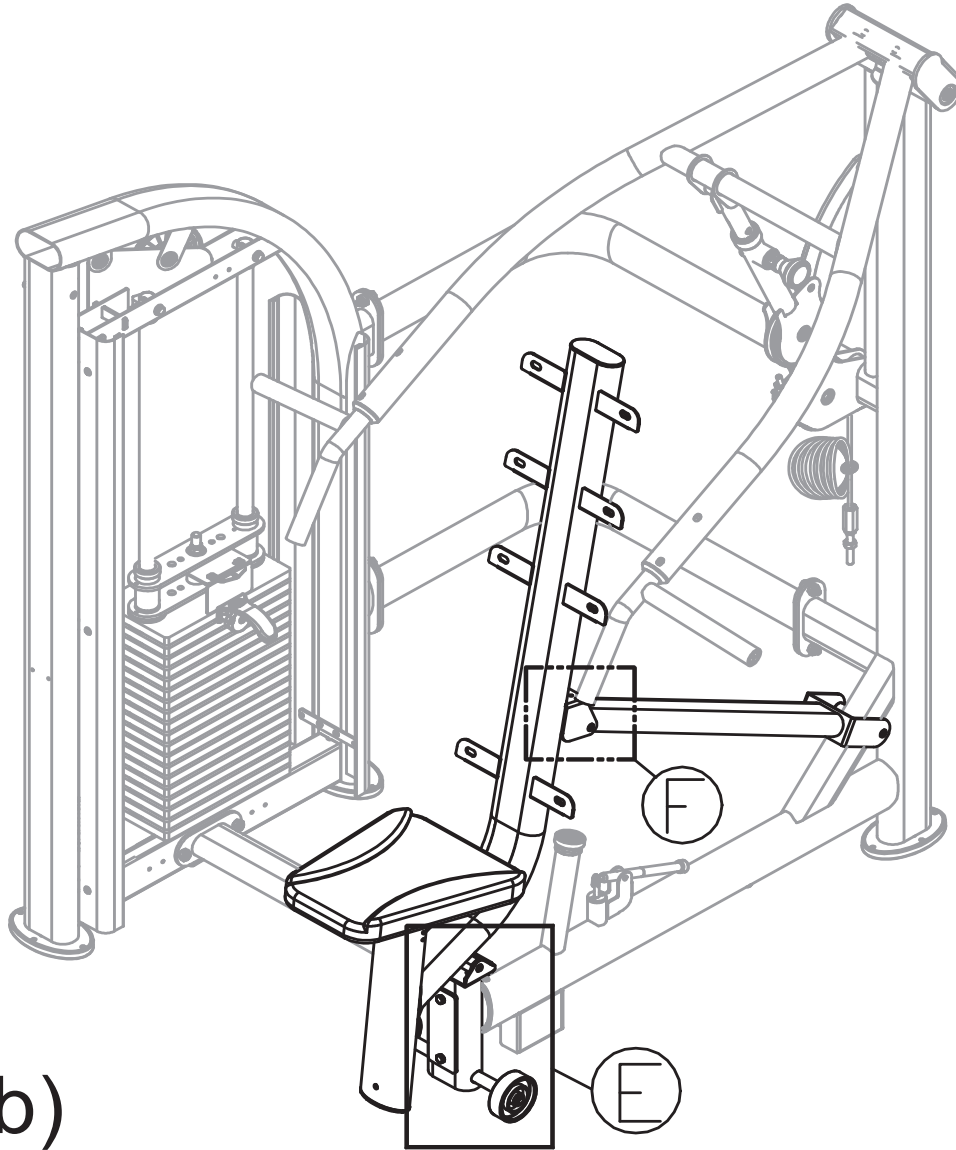

STEP 7 Seat Frame Leveling Test


- (a) Place the unit where it will be used.
- (b) Loosen screws in area B on the seat frame (A27). Press the seat frame (A27) to the shortest position, making the wheels touch the ground. Fully secure the screws in area B.
- (c) Press down on the adjustment rod in area A. Push the seat frame (A27) as shown. Make sure the wheels touch the floor.
- (d) If the unit is not level, repeat steps (b) to (c) to make the unit level. If the floor is not level, place a wood or metal plate to support the wheels.

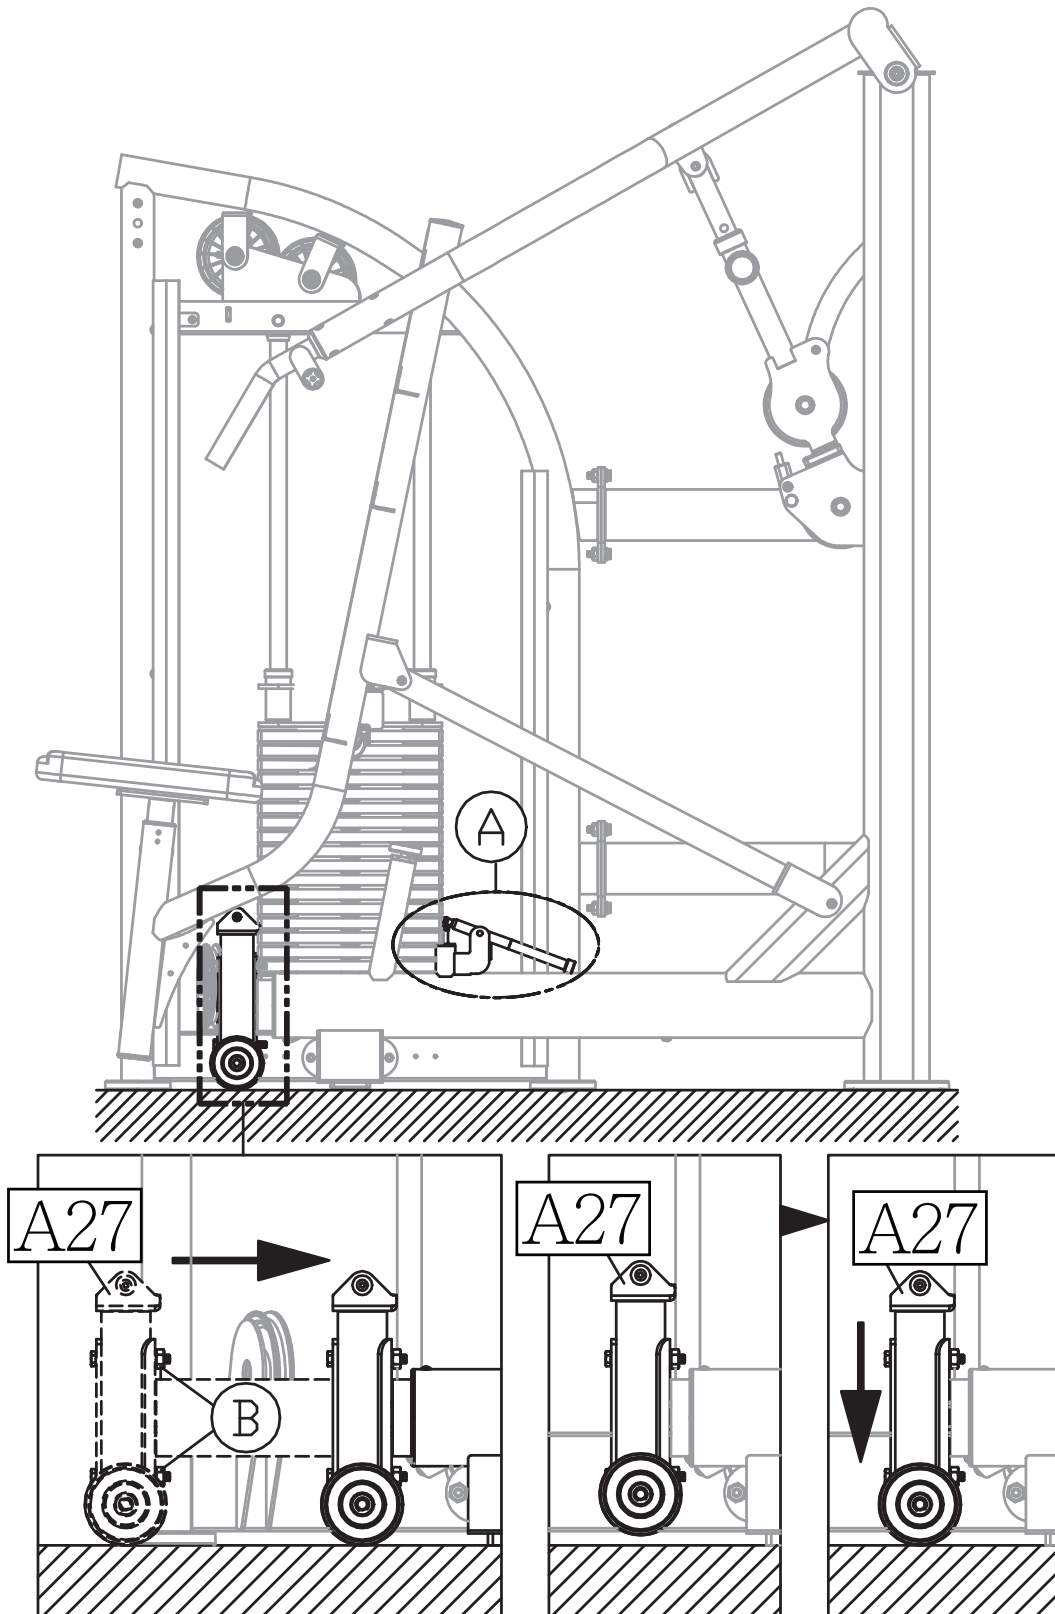


STEP 8 Seat Back Installation

(a) First, remove screws (61) from the seat back (A26).

(b) Use screws (61) to secure the seat back (A26) onto the seat frame (A27) as shown.

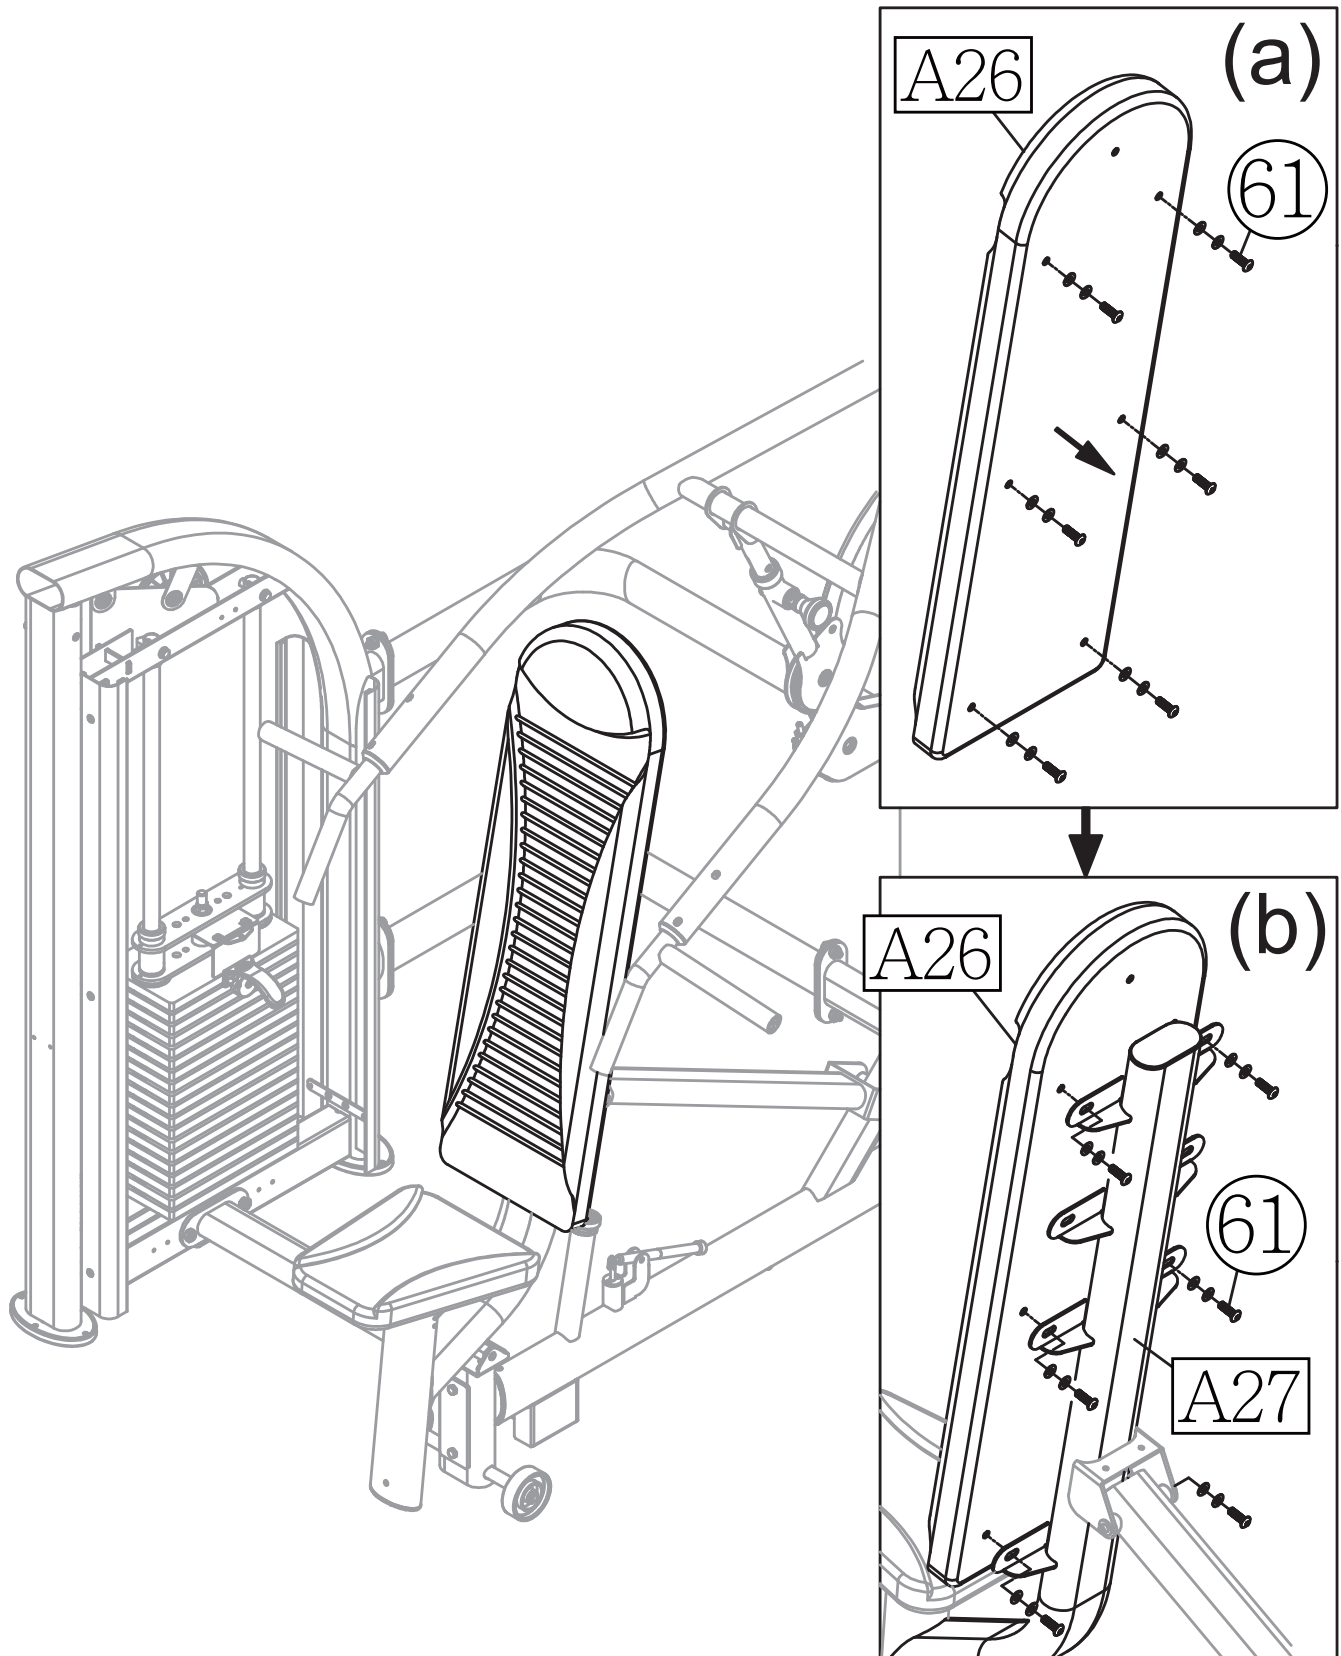


STEP 9 Cable Installation

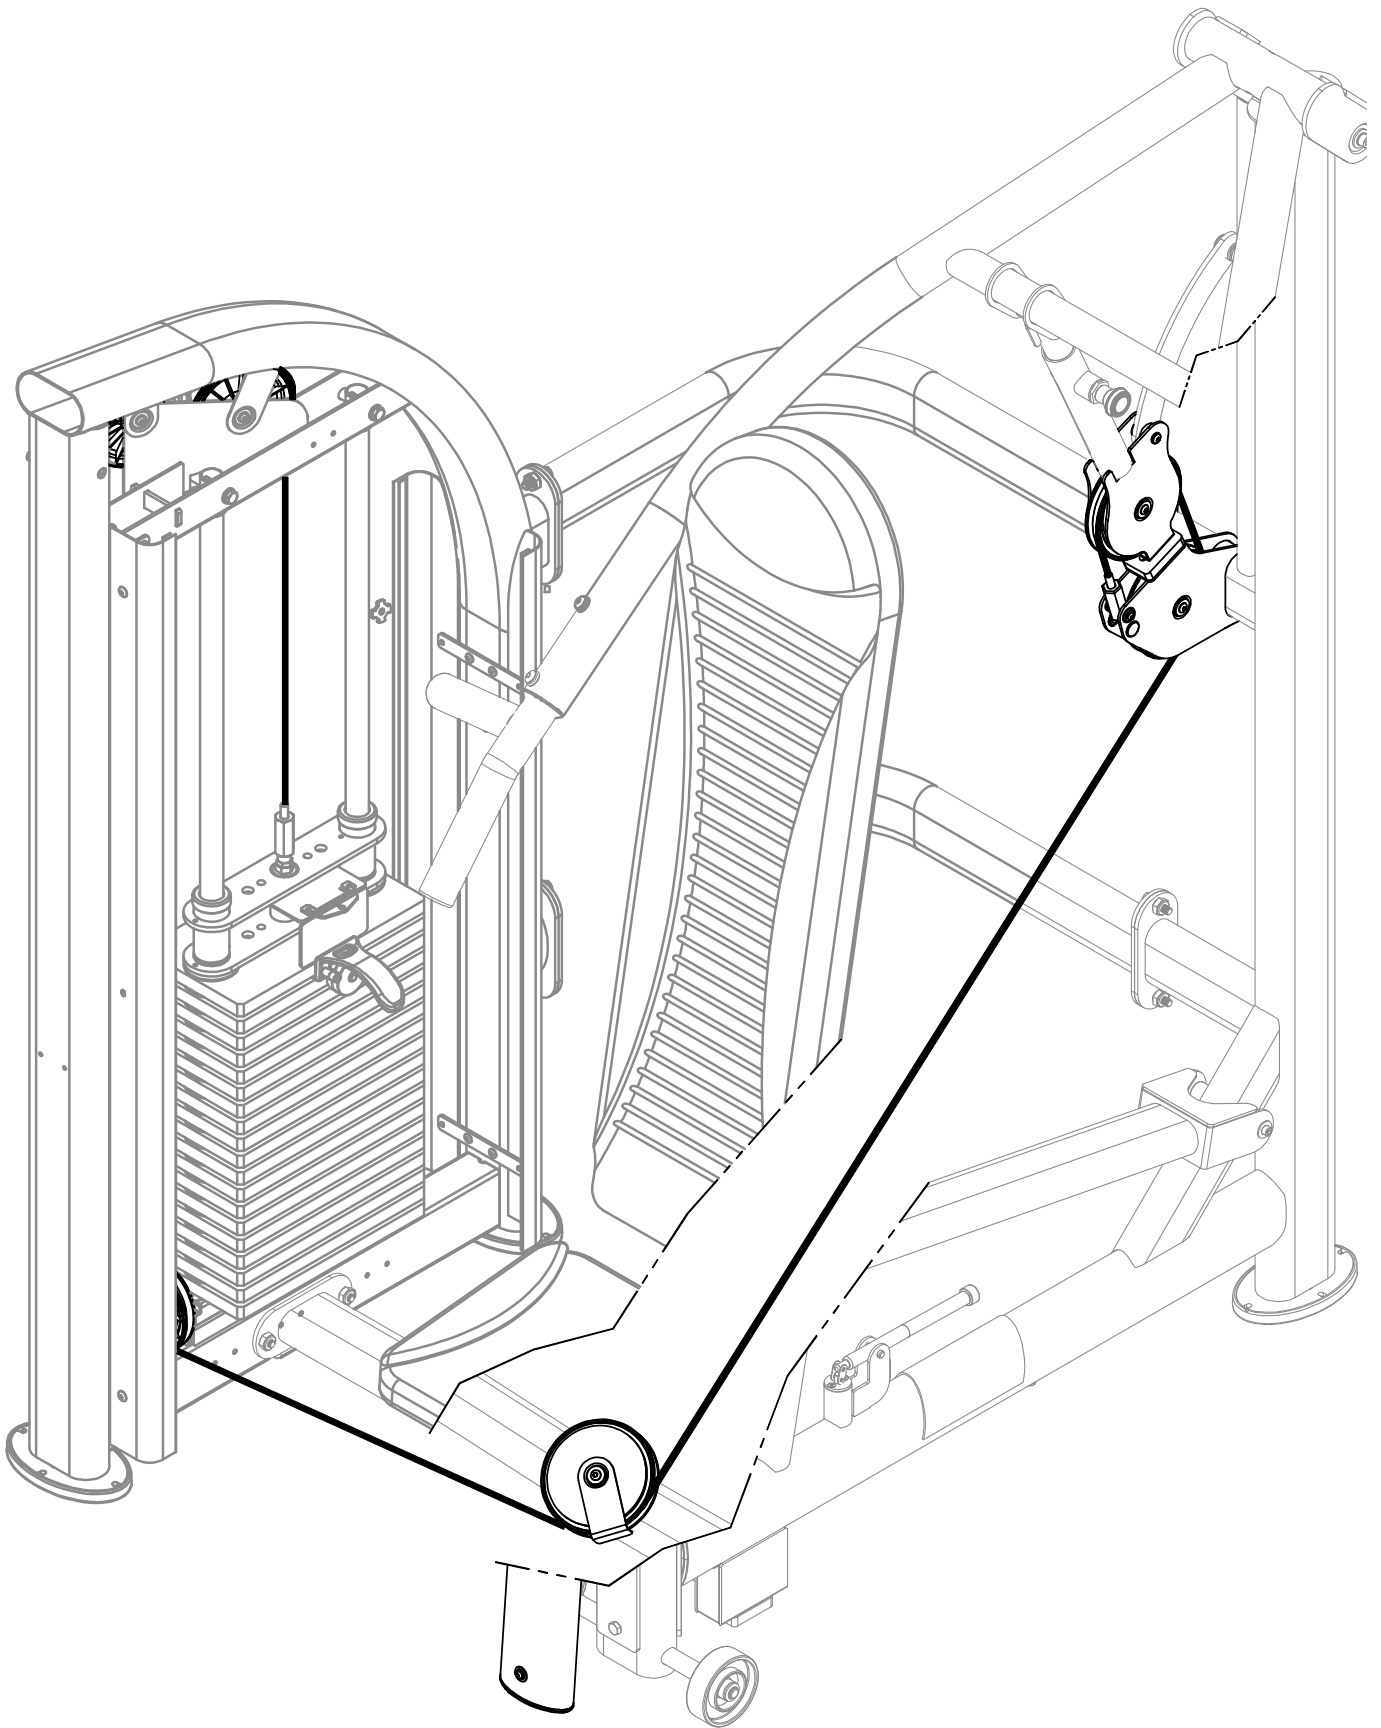


STEP 9 Cable Installation (CONT.)

(a) Before installing the cable, first remove the cover (71) and screws (72) in area K and the pulley cover (73) and screws (67) in area F as shown. Carefully set each piece aside in a safe place for later use.

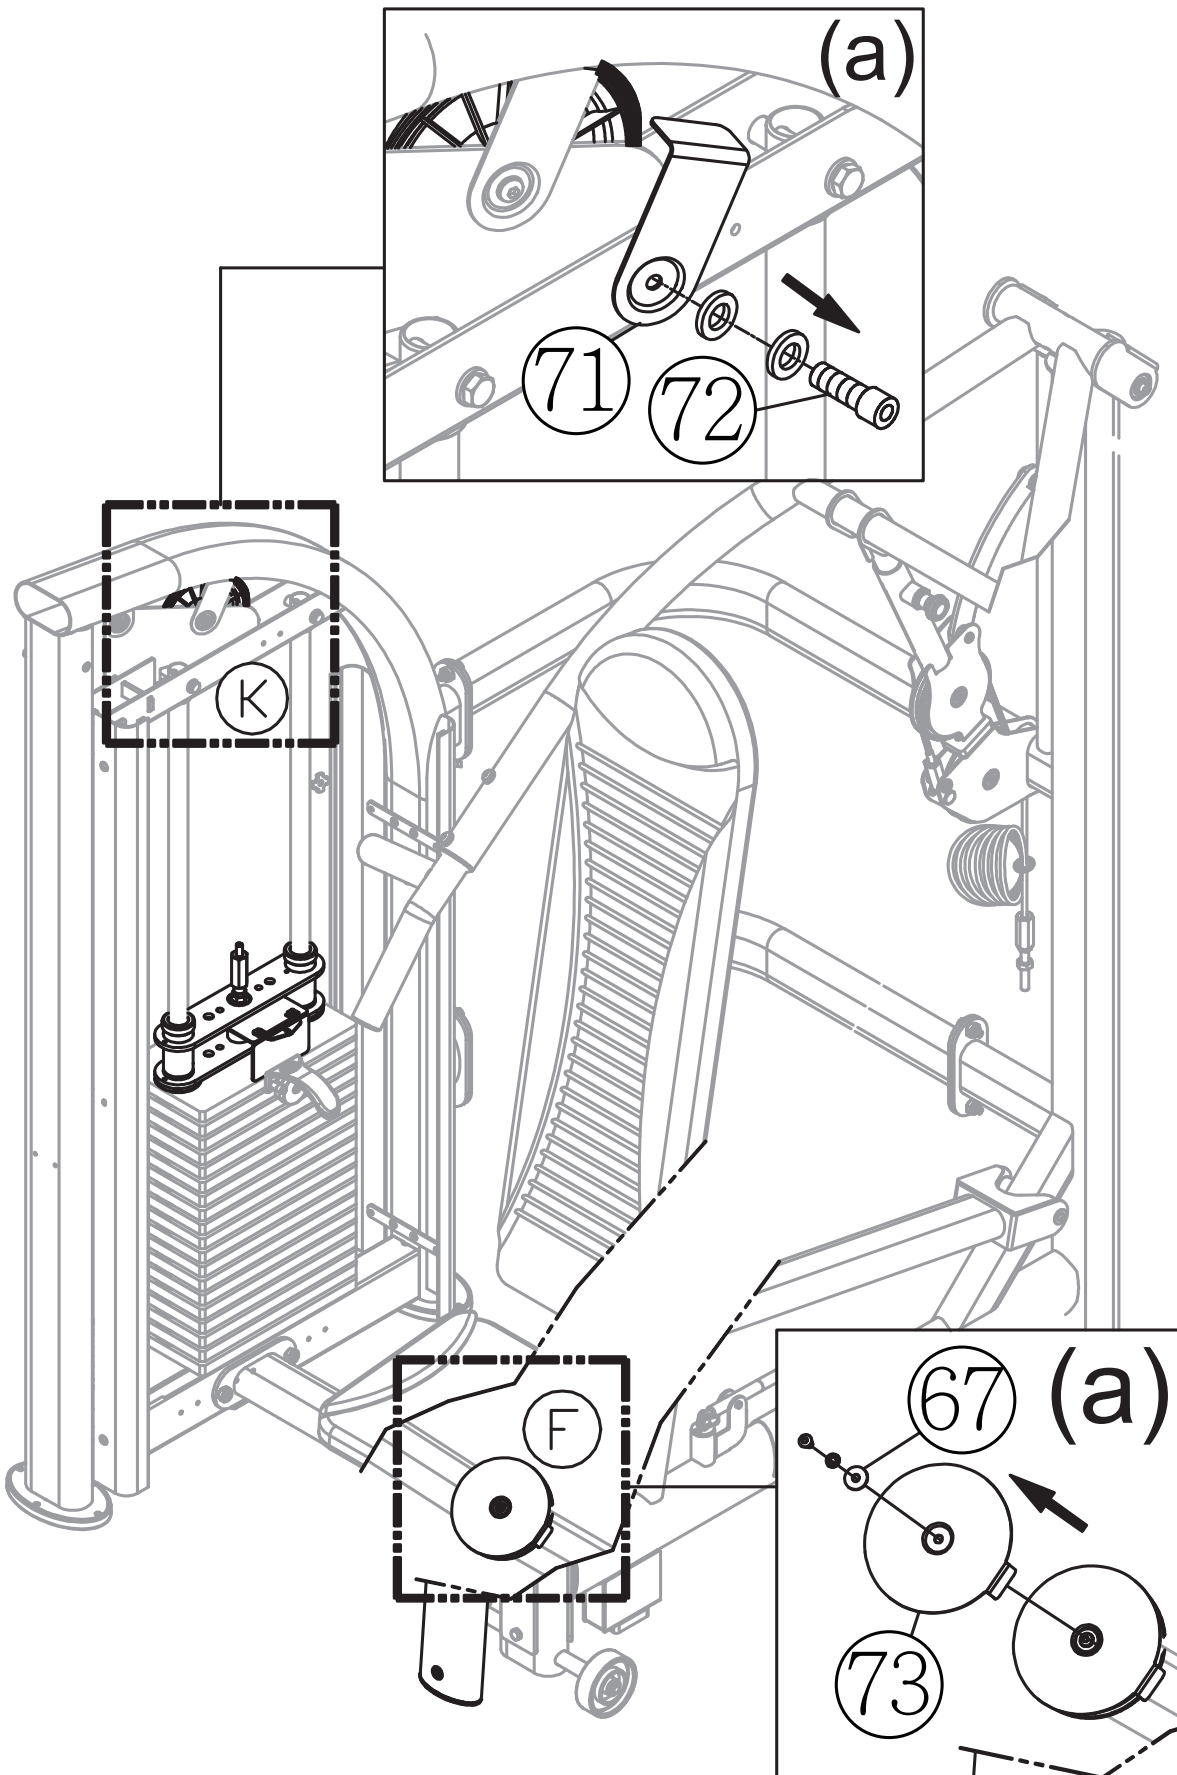

STEP 9 Cable Installation (CONT.)

(b) Cut off the zip tie in area E to uncurl the cable. Pull the cable to thread through the pulley in area F as indicated by the arrows and then secure the pulley cover with screws (67). And thread the cable through pulley (A20) in area G and secure with screws (75). Next thread the cable as indicated by the arrows through the upper pulley (A20) in area H and push the pulley onto its mount as shown and then secure the cover (71) with screws (72). Thread the cable through the pulley in area K and secure the cover (71) with screws (72). Finally, secure the cable nut onto the weight stack rod as shown.

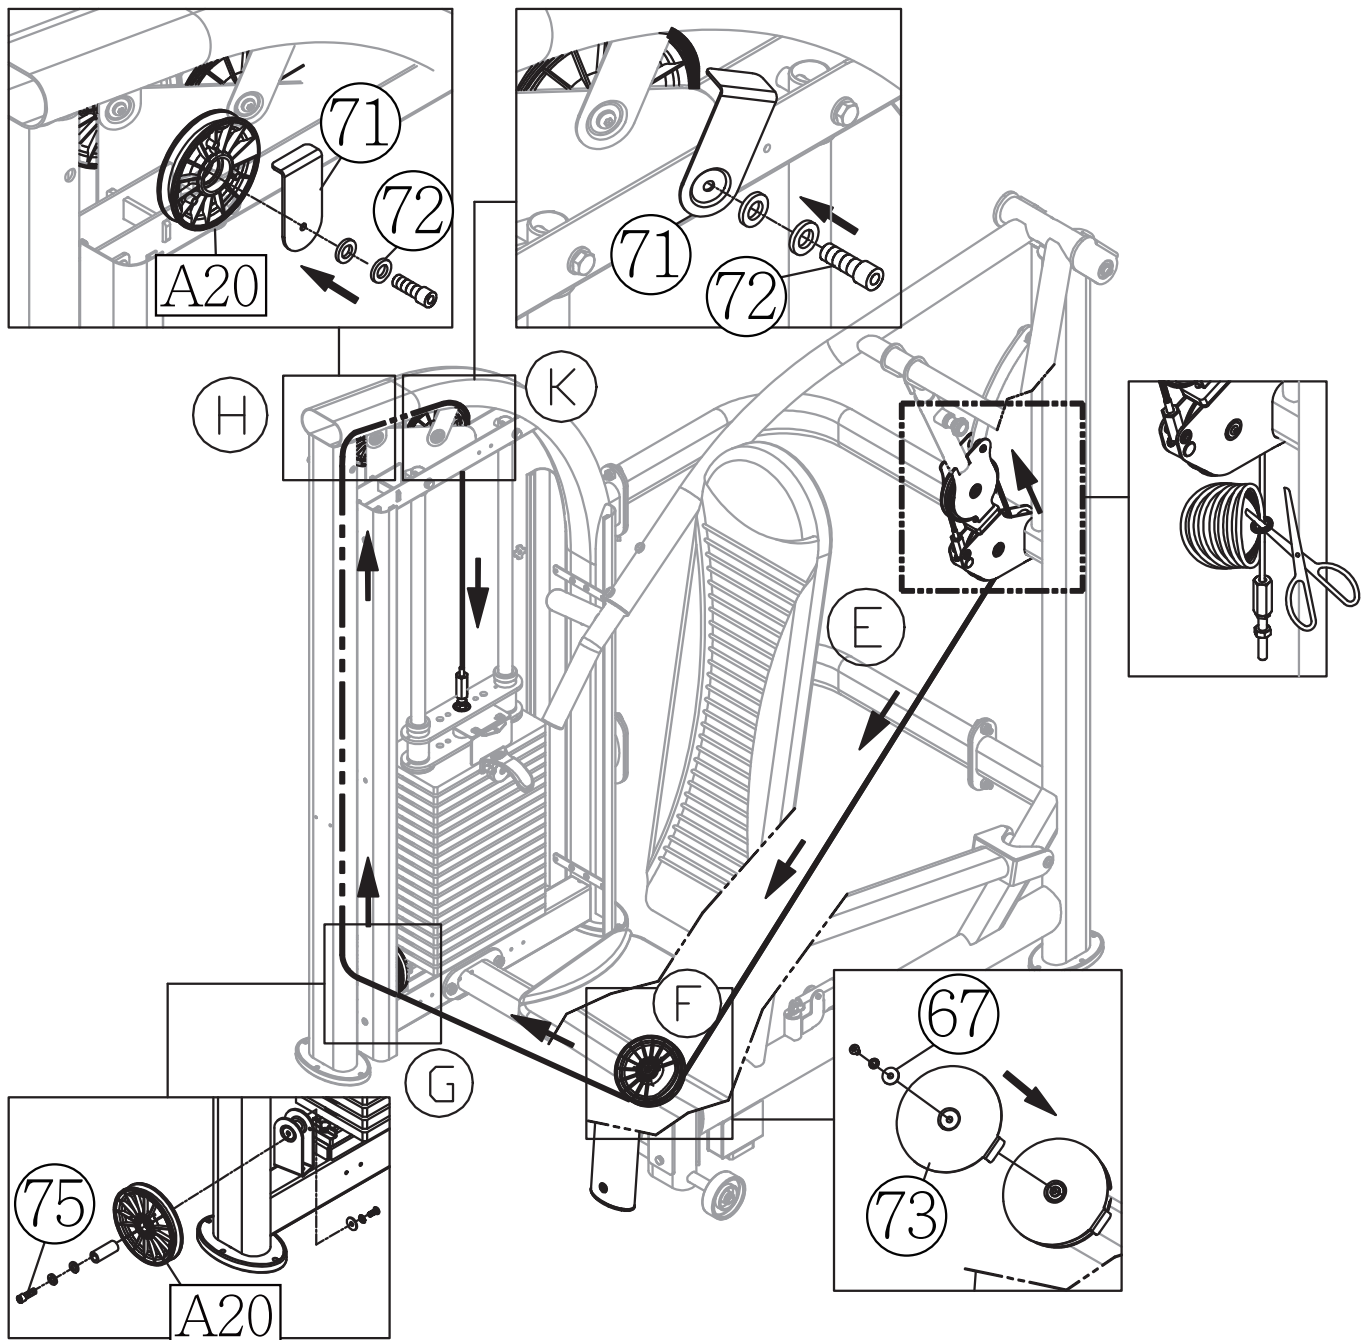


STEP 10 Cable Adjustment

(a) After securing the cable nut onto the weight stack rod (A8). Make sure the gap between the (X) and (Y) nut is within 40mm (1.6") and the (X) nut is secured to a depth of 20mm at least. If the gap exceeds the 40mm limit, the cable needs to be adjusted to the proper length to avoid it's come off.


(b) Insert the stack fork (47) into the gap under the lowest weight plate and then adjust the nut (Y) until the upper stack carriage moves slightly.

To adjust the cable, first insert an open end wrench into (Z) hole. Loosen (Y) nut and then adjust (X) nut. If the cable is too long, adjust (X) nut downward. If too short, adjust (X) nut upward. After adjusting (X) nut, tighten (Y) nut against the weight stack to secure this position.

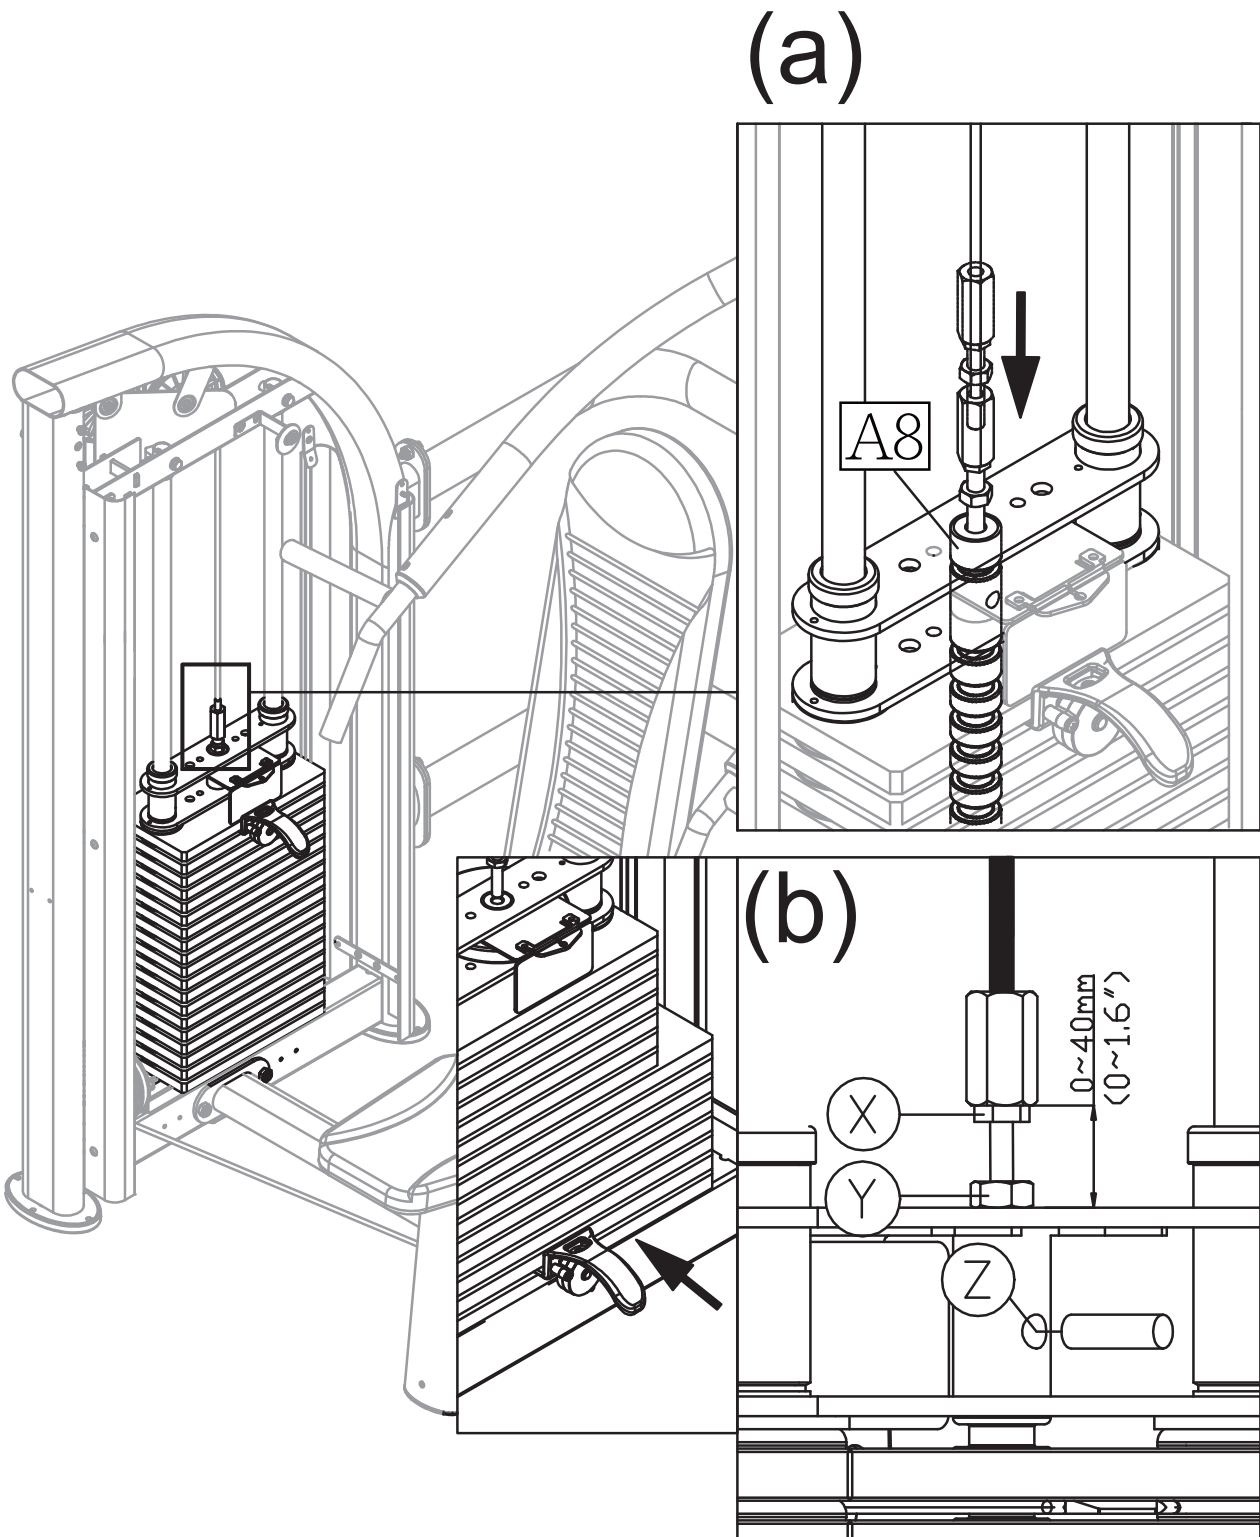


STEP 11 Cable Adjustment if too Loose

If there is no way to adjust area C, please rotate area C out 30mm (about 1 inch). Remove the bushing and screws (64) from hole E, and soft cap (65) from hole F in area D and then put the cable screw in hole F. And put the bushing and screws (64) back into hole F, and soft cap (65) back into hole E as shown.

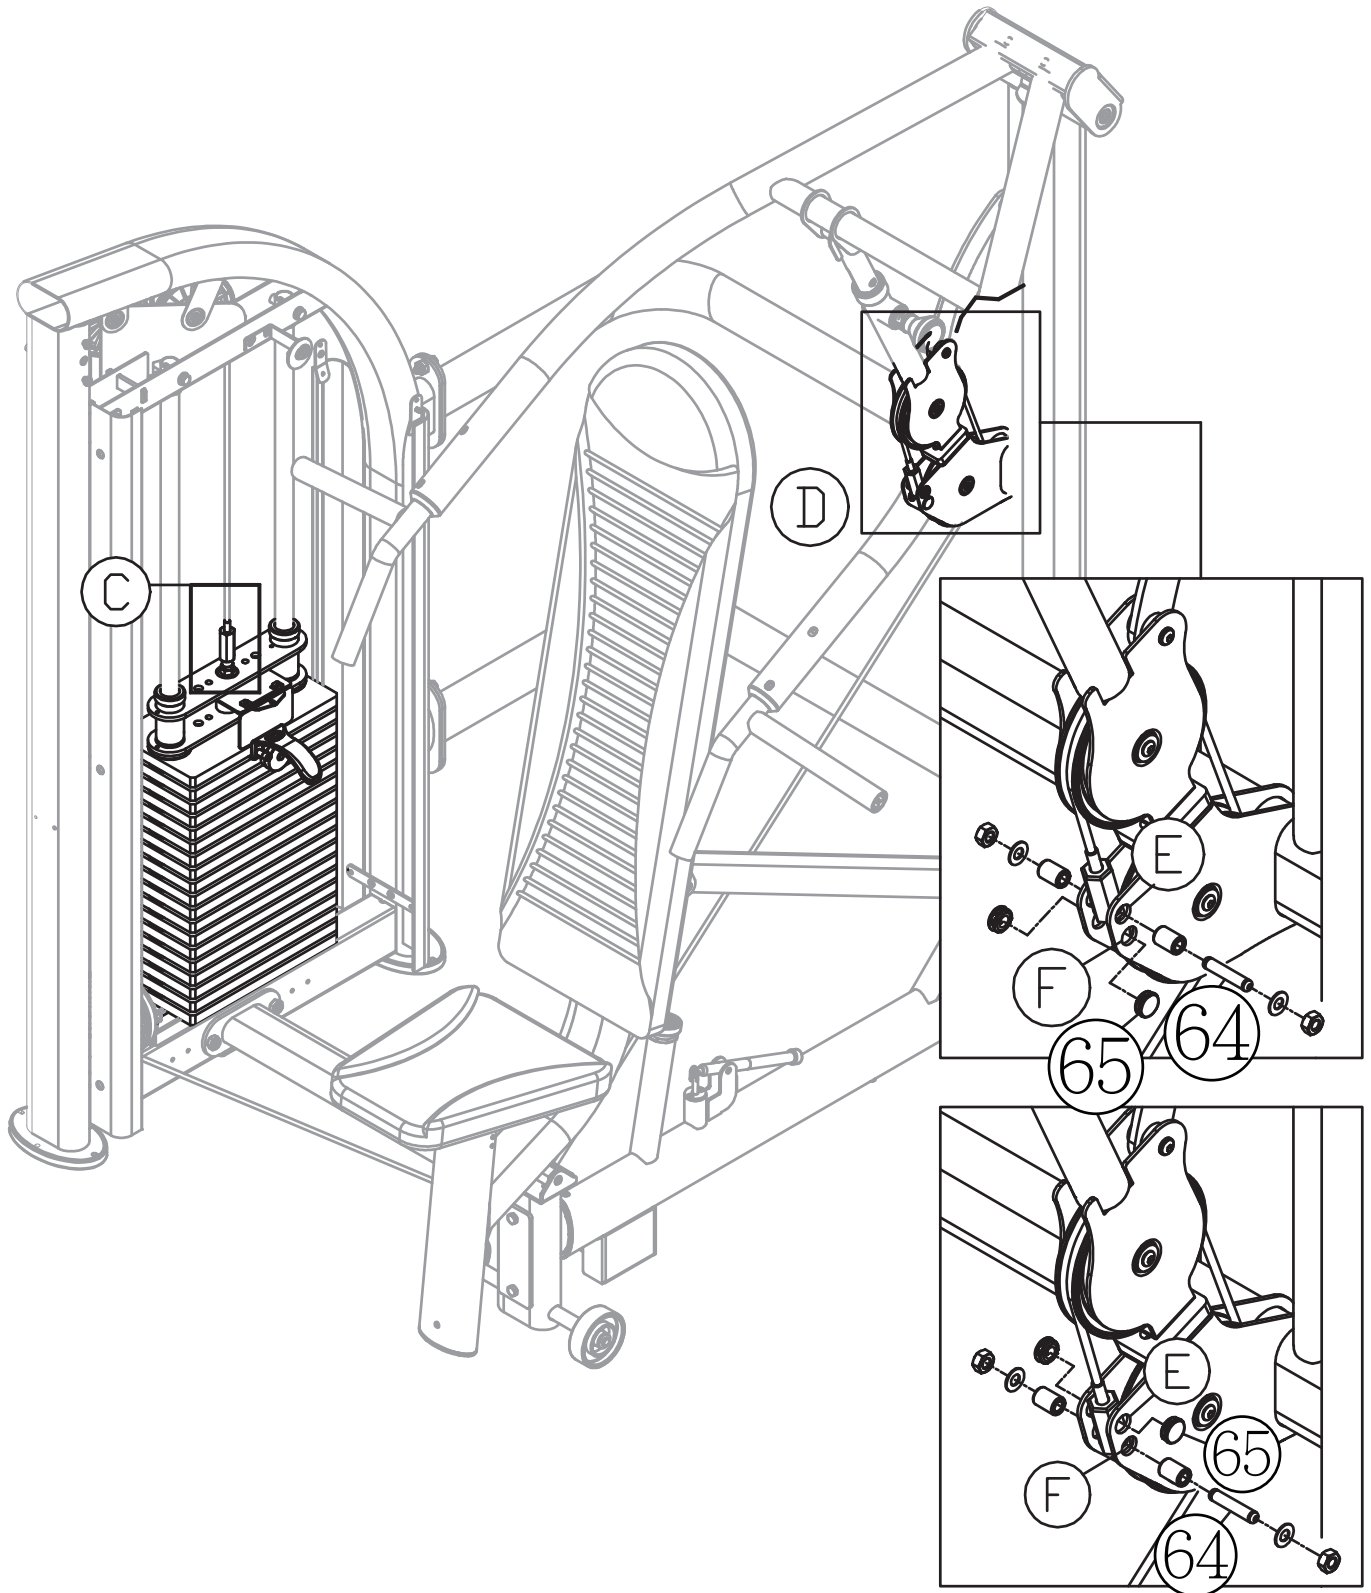


STEP 12 Covers Installation

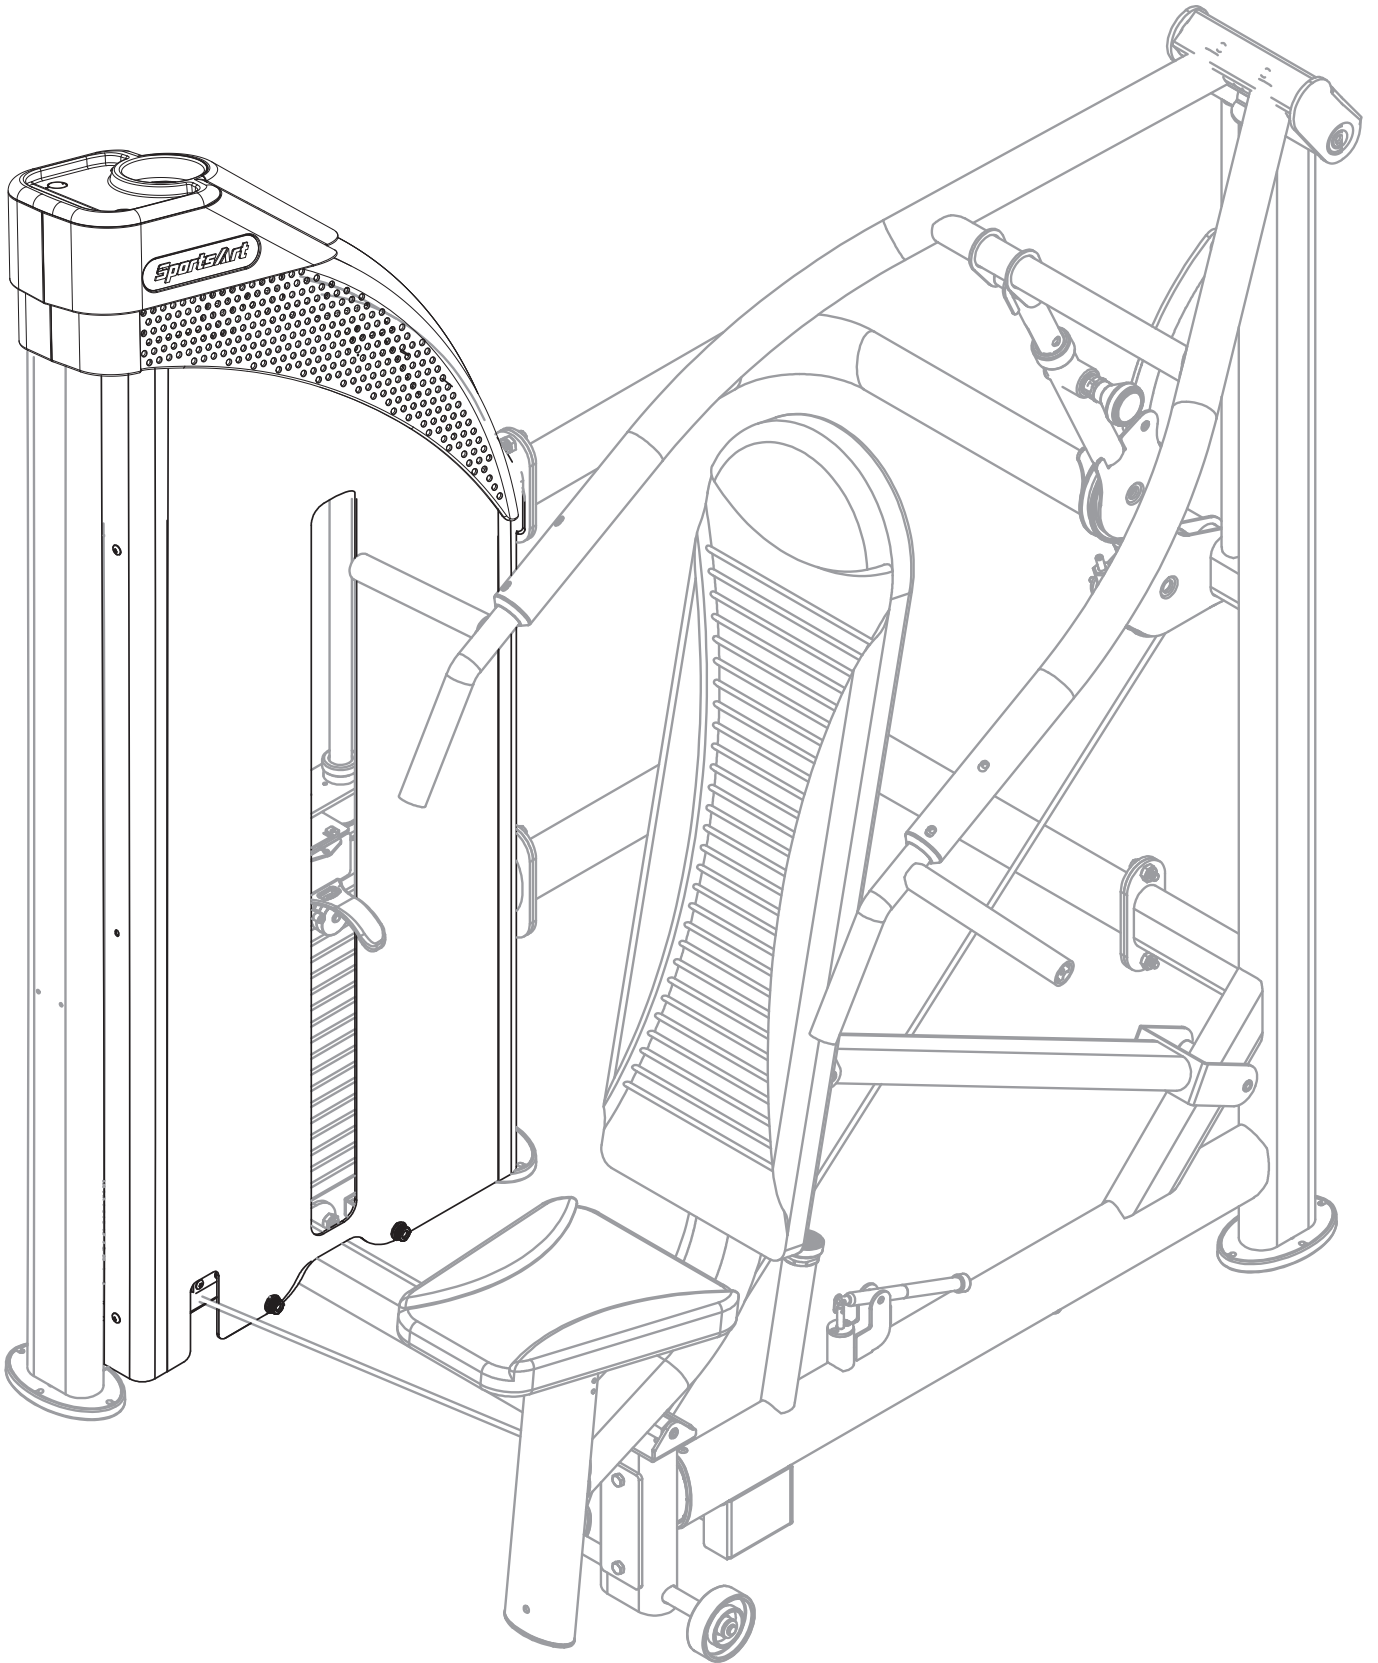

STEP 12 Covers Installation (CONT.)

Install the front and rear covers






- (a) Install the square snap bushings (14) to the anchor brackets of shroud (square hole) (A9-1). Secure the anchor brackets of shroud (square hole) (A9-1) with the square snap bushings (14) to the front and back of the upper crossmember assembly of weight stack tower (A3) with screws (11). Secure the anchor brackets of shroud (tapped hole) (A9-2) to the front and back of the lower crossmember assembly of weight stack tower (A3) with screws (11).
- (b) Insert the front and rear shrouds (A14, A15) along the plate slot from the top into the main frame. (Note: To avoid damage to the shrouds, place the weight selector (A7) on the top weight before inserting the shrouds.)
- (c) Secure the lower shroud with the screw (80).

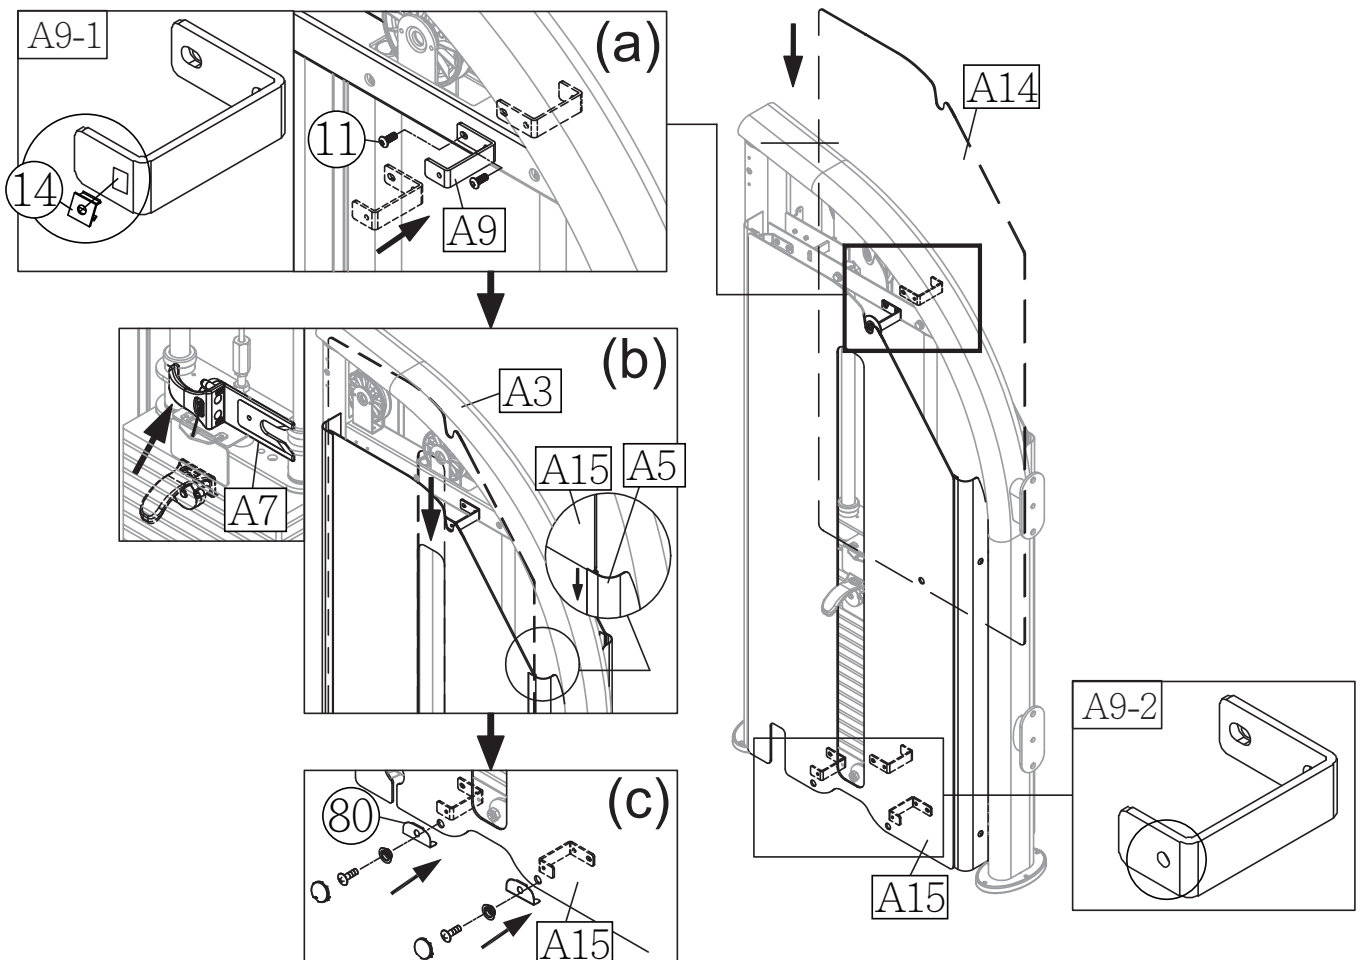

STEP 12 Covers Installation (CONT.)


Install plastic cover

- (a) Install the square snap bushing (14) and fastener (24) to the anchor bracket (A36) and remove the screws (81) on the main frame. Secure the anchor bracket (A36) to the main frame with the screws (81).
- (b) Secure the left/right perforated boards (A1) to the main frame with the screws (21).
- (c) Assemble the right side cover (A2) and the front cover A (A6) together before installing to the main frame.
- (d) Assemble the left side cover (A2) and the front cover A (A6) together and then embed the top cover (A35), which is the water bottle holder, at an oblique angle.
- (e) Secure the top cover (A35) to the main frame with the screws (22) and then install the round screw caps (23).

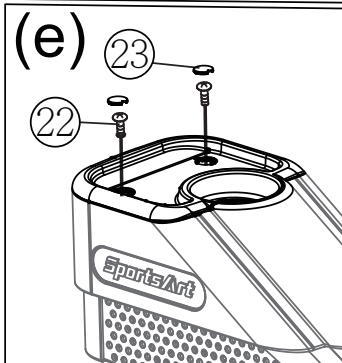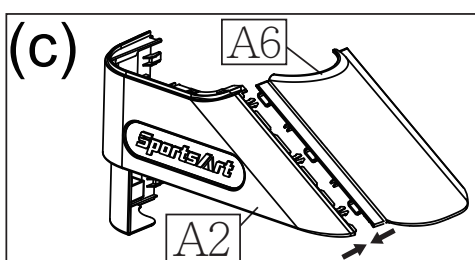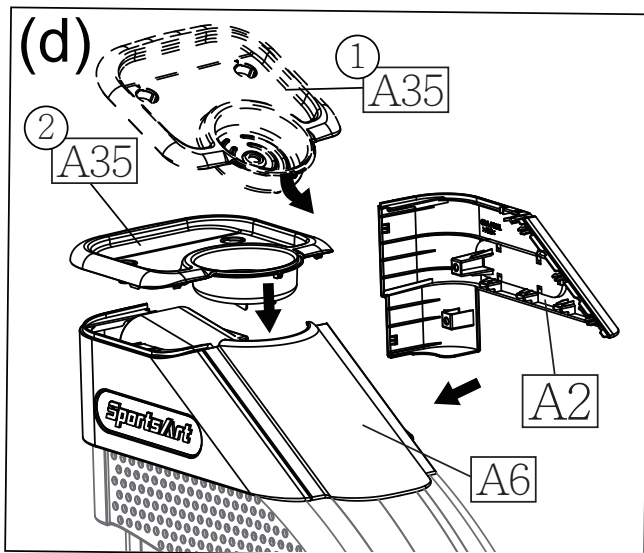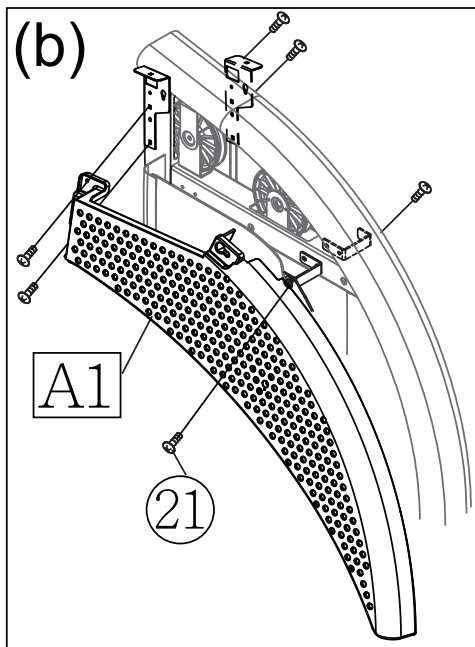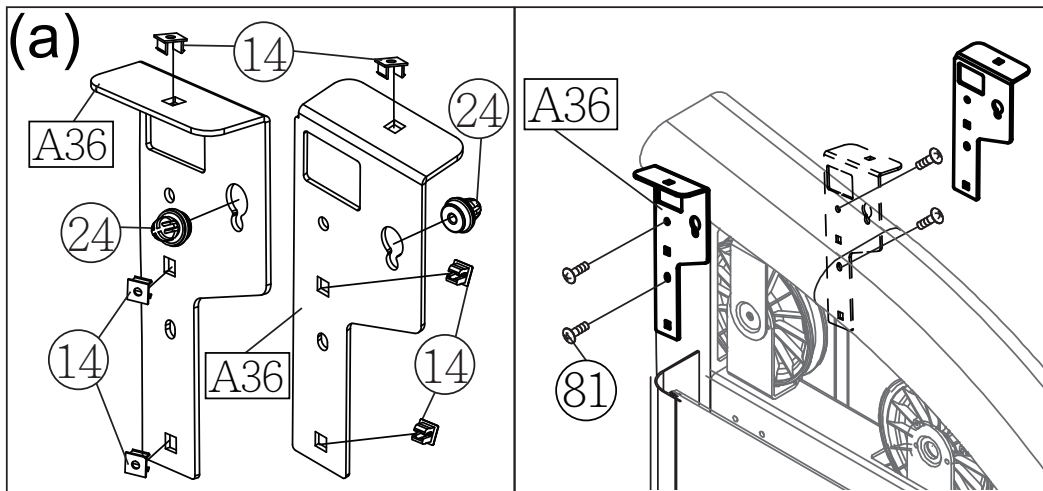

STEP 13 Install cap nut


Install the cap nuts to the corresponding positions according to the following numbers.

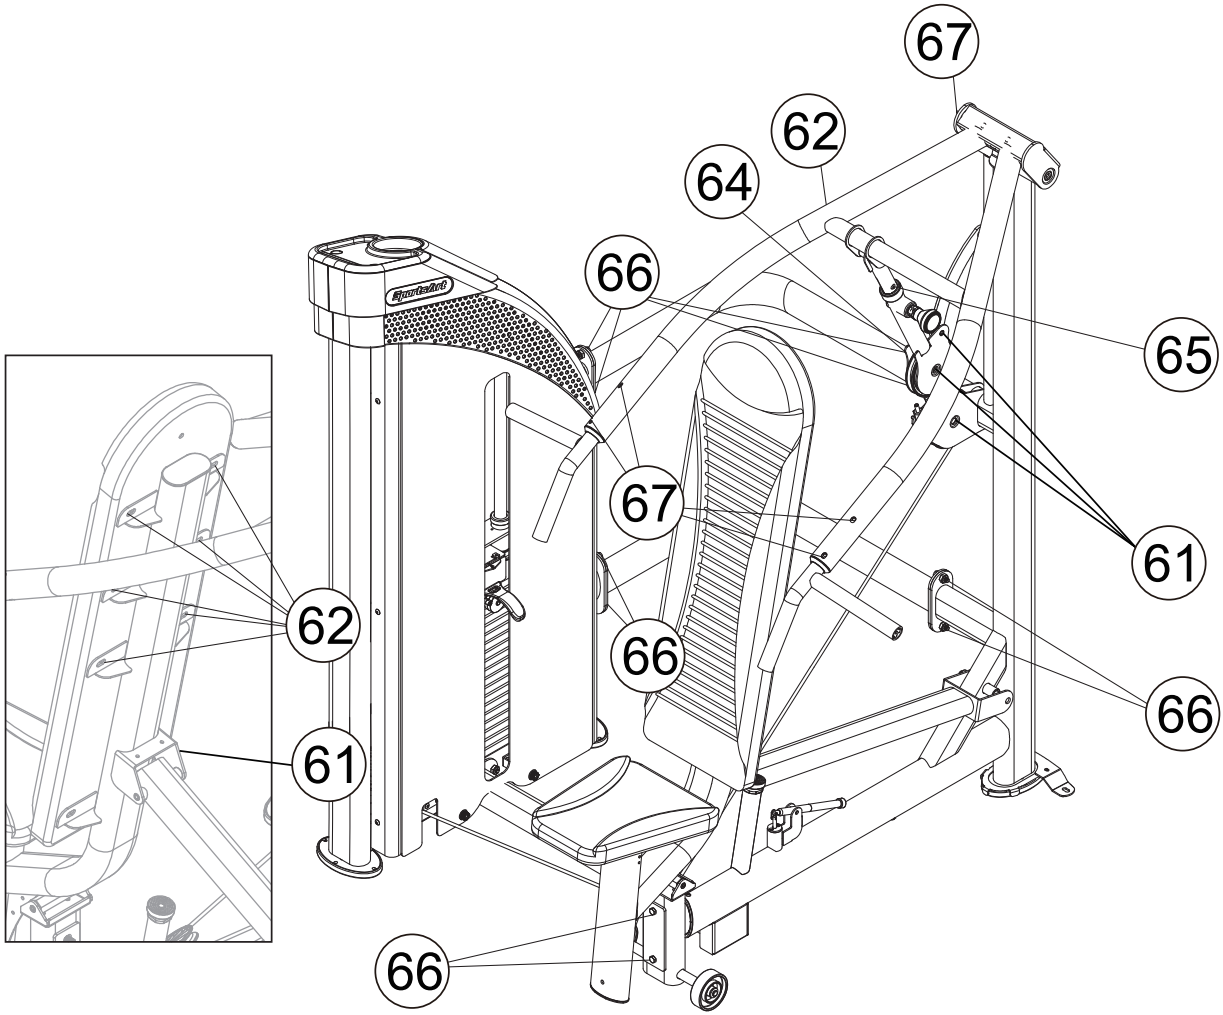

60 GBA-P019	61 GBA-P024	62 GBA-P014	63 GFA-P136	64 GBA-P018
65 GBA-P017	66 GBA-P016	67 TAO-P096A	68 GFA-P137	69 GFA-P138

STEP 14 Secure the Product


- (a) Remove screws (66) from the floor fixing bracket (A18).
- (b) Insert the U clip (A19) onto the machine (Make sure the U clip with the correct side downward as shown below), and then secure the floor fixing bracket (A18) with screws (66).
- (c) Secure the floor fixing bracket to the floor with the floor fixing bolt, nut and washer as shown to make sure the machine is firmly fixed to the floor when operating.
(Note: The screw hole of floor fixing bracket is $\varnothing 9\text{mm}$, please make sure using the suitable floor fixing bolt and drilling the proper hole on the floor.)

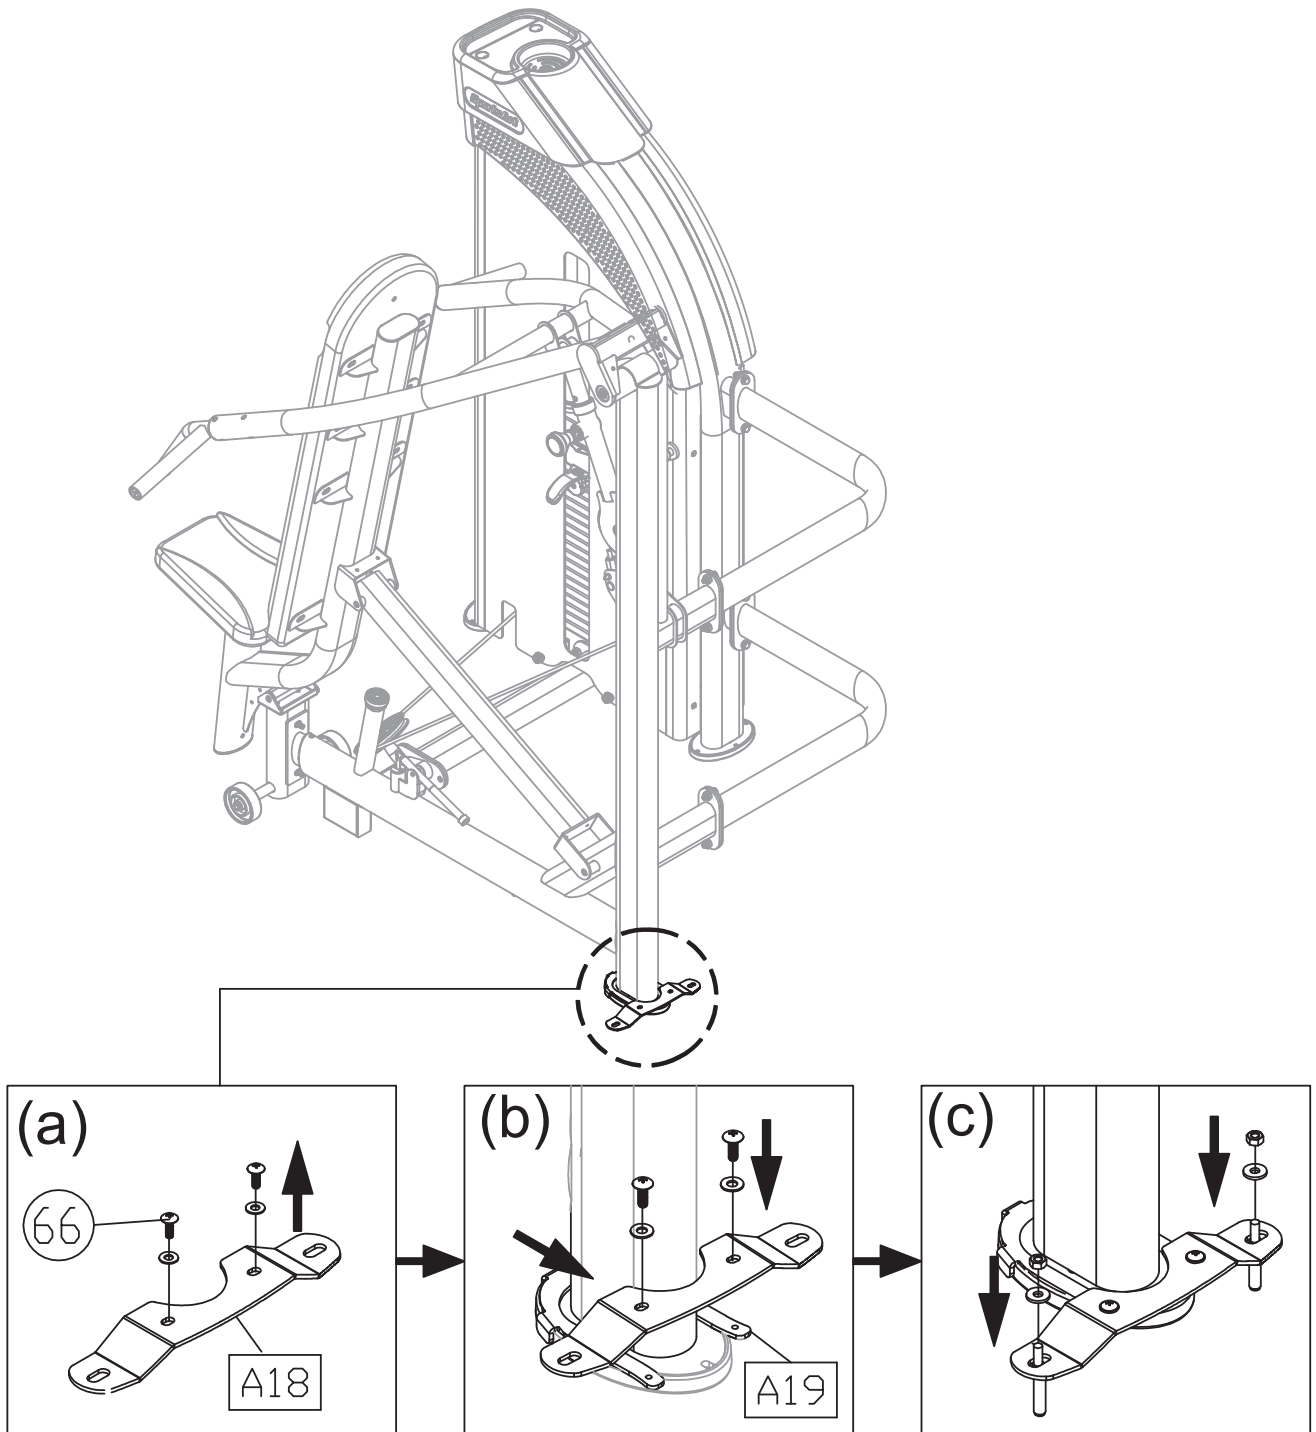

STEP 15 Level the Product


If the product is installed on an uneven surface to cause the instability of the product, place the support spacer under the foot pad to make sure its stability.

(A few support spacers are provided in the packaging of this product.)

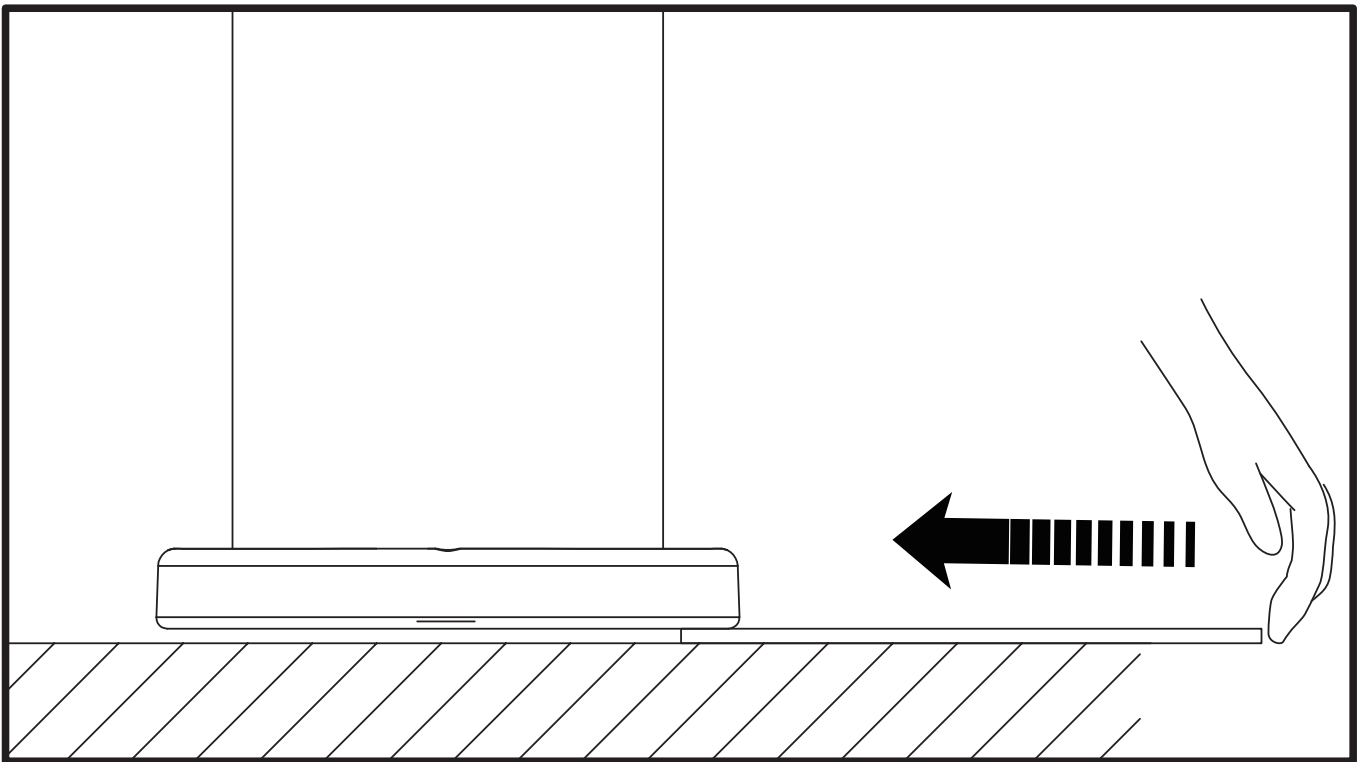

STEP 16 Stack Fork Inspections

- * Please follow operating instructions on the product sticker to test operation and confirm that the equipment is working properly.
- * Insert the stack fork to make sure that every weight plate can be engaged easily.
- * Insert the stack fork at the heaviest weight setting at which you can safely operate the equipment.
- * Exercise to lift the stack several times, and then inspect the cable for proper tightness. If necessary, make adjustments according to the instructions "Cable adjustment" of this manual.
- * Ensure that anyone who is not operator does not near the equipment when testing.

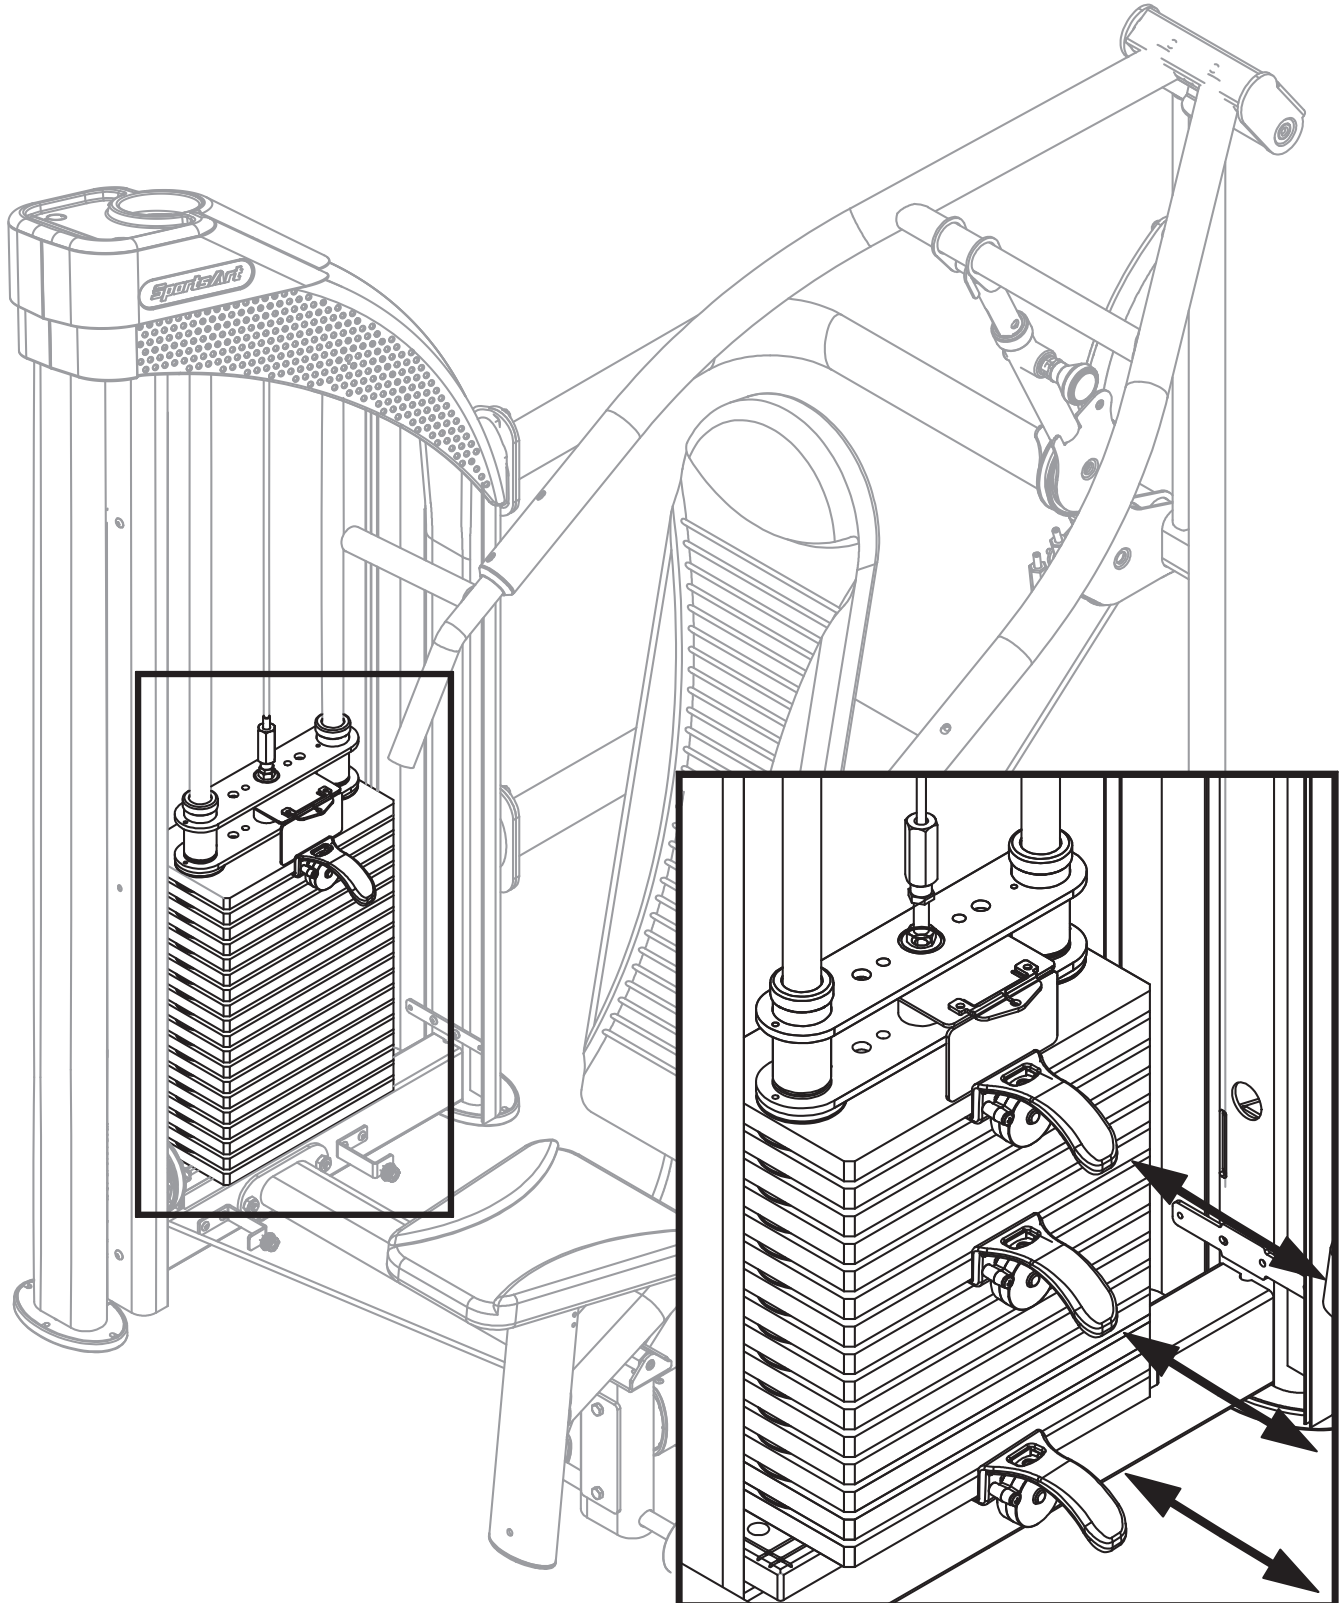

STEP 17 Unit Inspection


After completing the assembly or regular maintenance, please follow instructions (a) through (c) below to inspect the unit. If the unit is disassembled or has been damaged in any way, it might cause injuries or cause the unit to fail.

- (a) Make sure the unit is steady and on a level surface. If the unit is not steady, make adjustments according to the instructions “Level the Unit” of this manual.
- (b) Make sure all parts are assembled and all fasteners are tightened.
- (c) Please follow operating instructions to test operation and confirm that the equipment is working properly. (Please refer to “Operate the Product” of this manual.)

5. OPERATION INSTRUCTION


OPERATION **Operating the Product**

* To raise the seat bottom, simply pull it upward. To lower the seat bottom, pull the adjustment knob outward and lower the seat bottom.

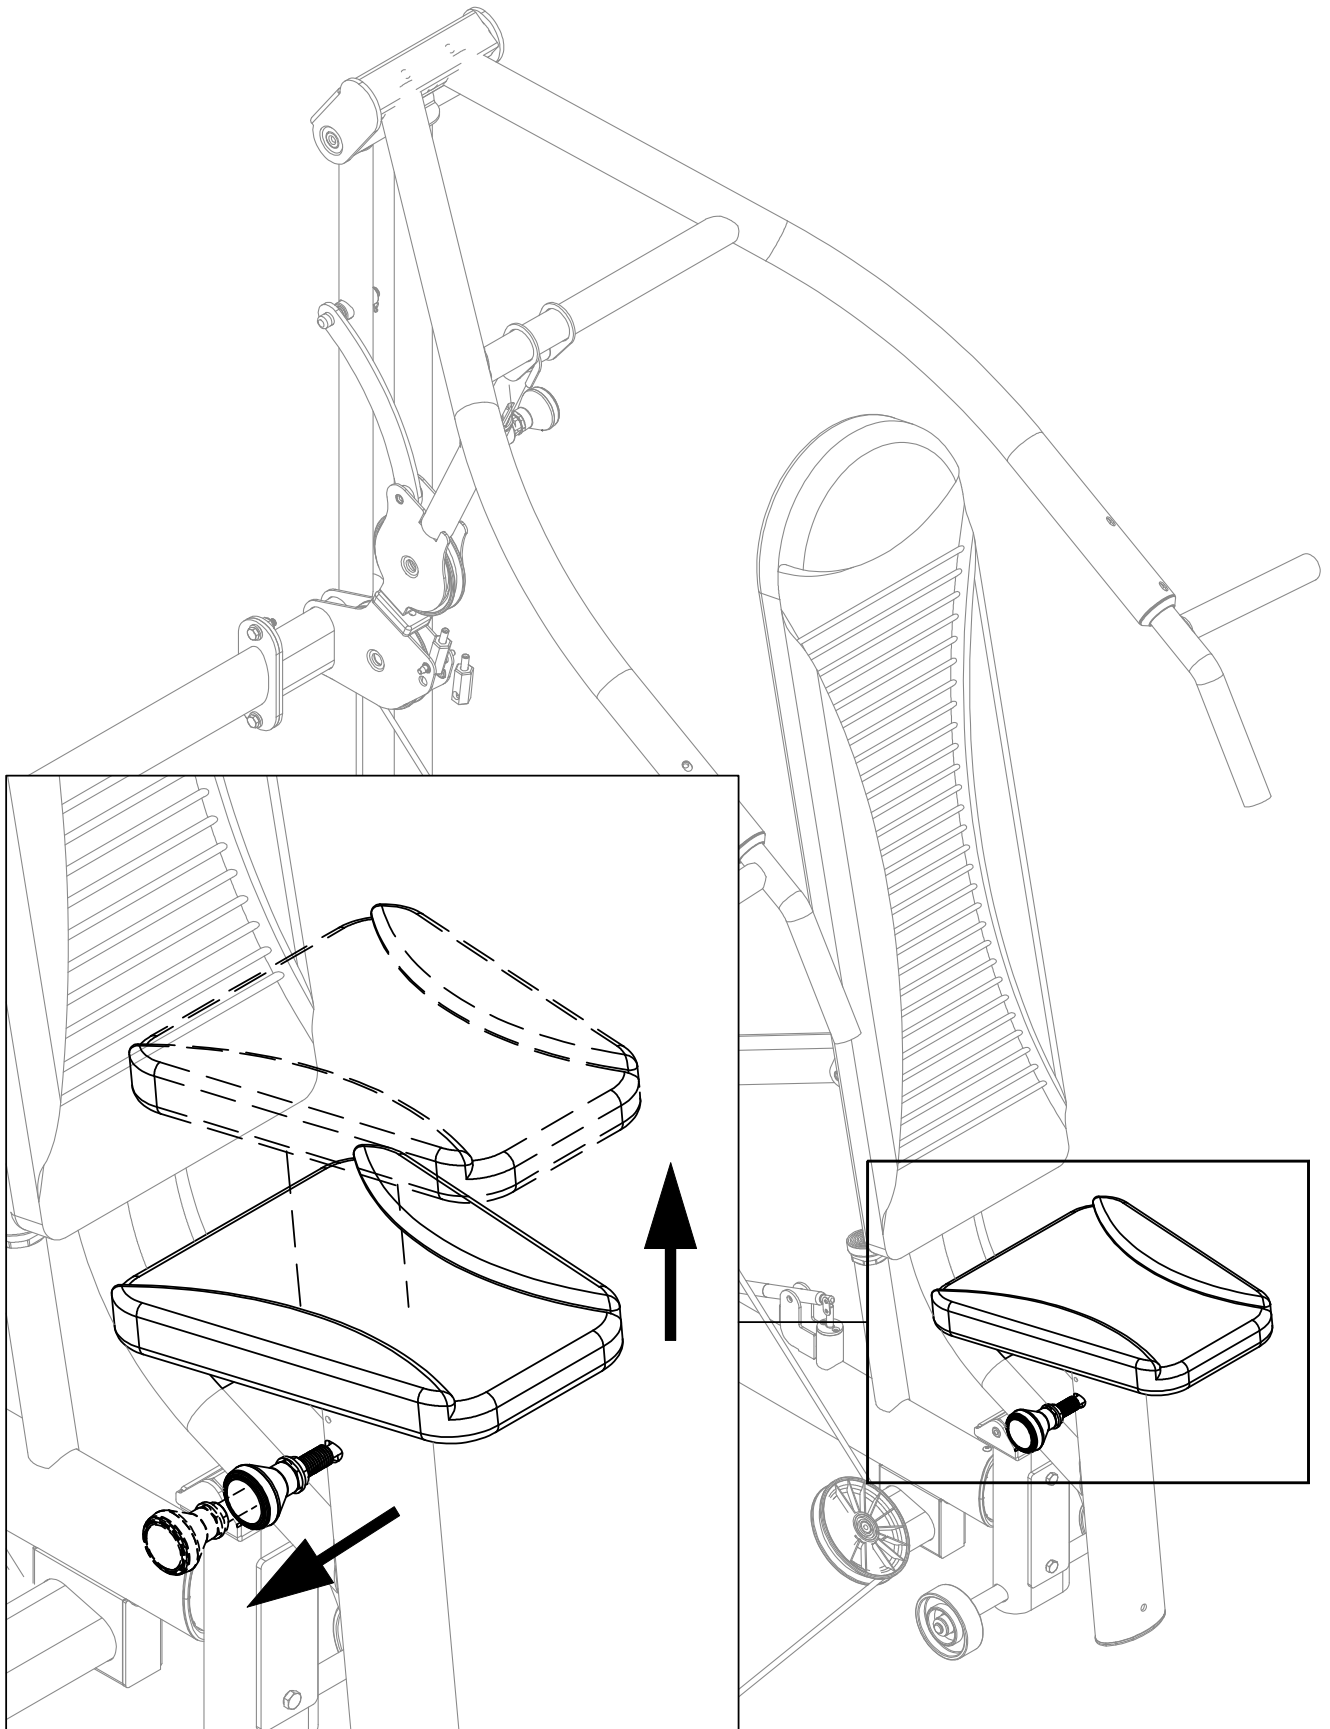


OPERATION Operating the Product (CONT.)

* To adjust the seat back position, press the adjustment lever with your foot. Then move the seat back to the position you desire.

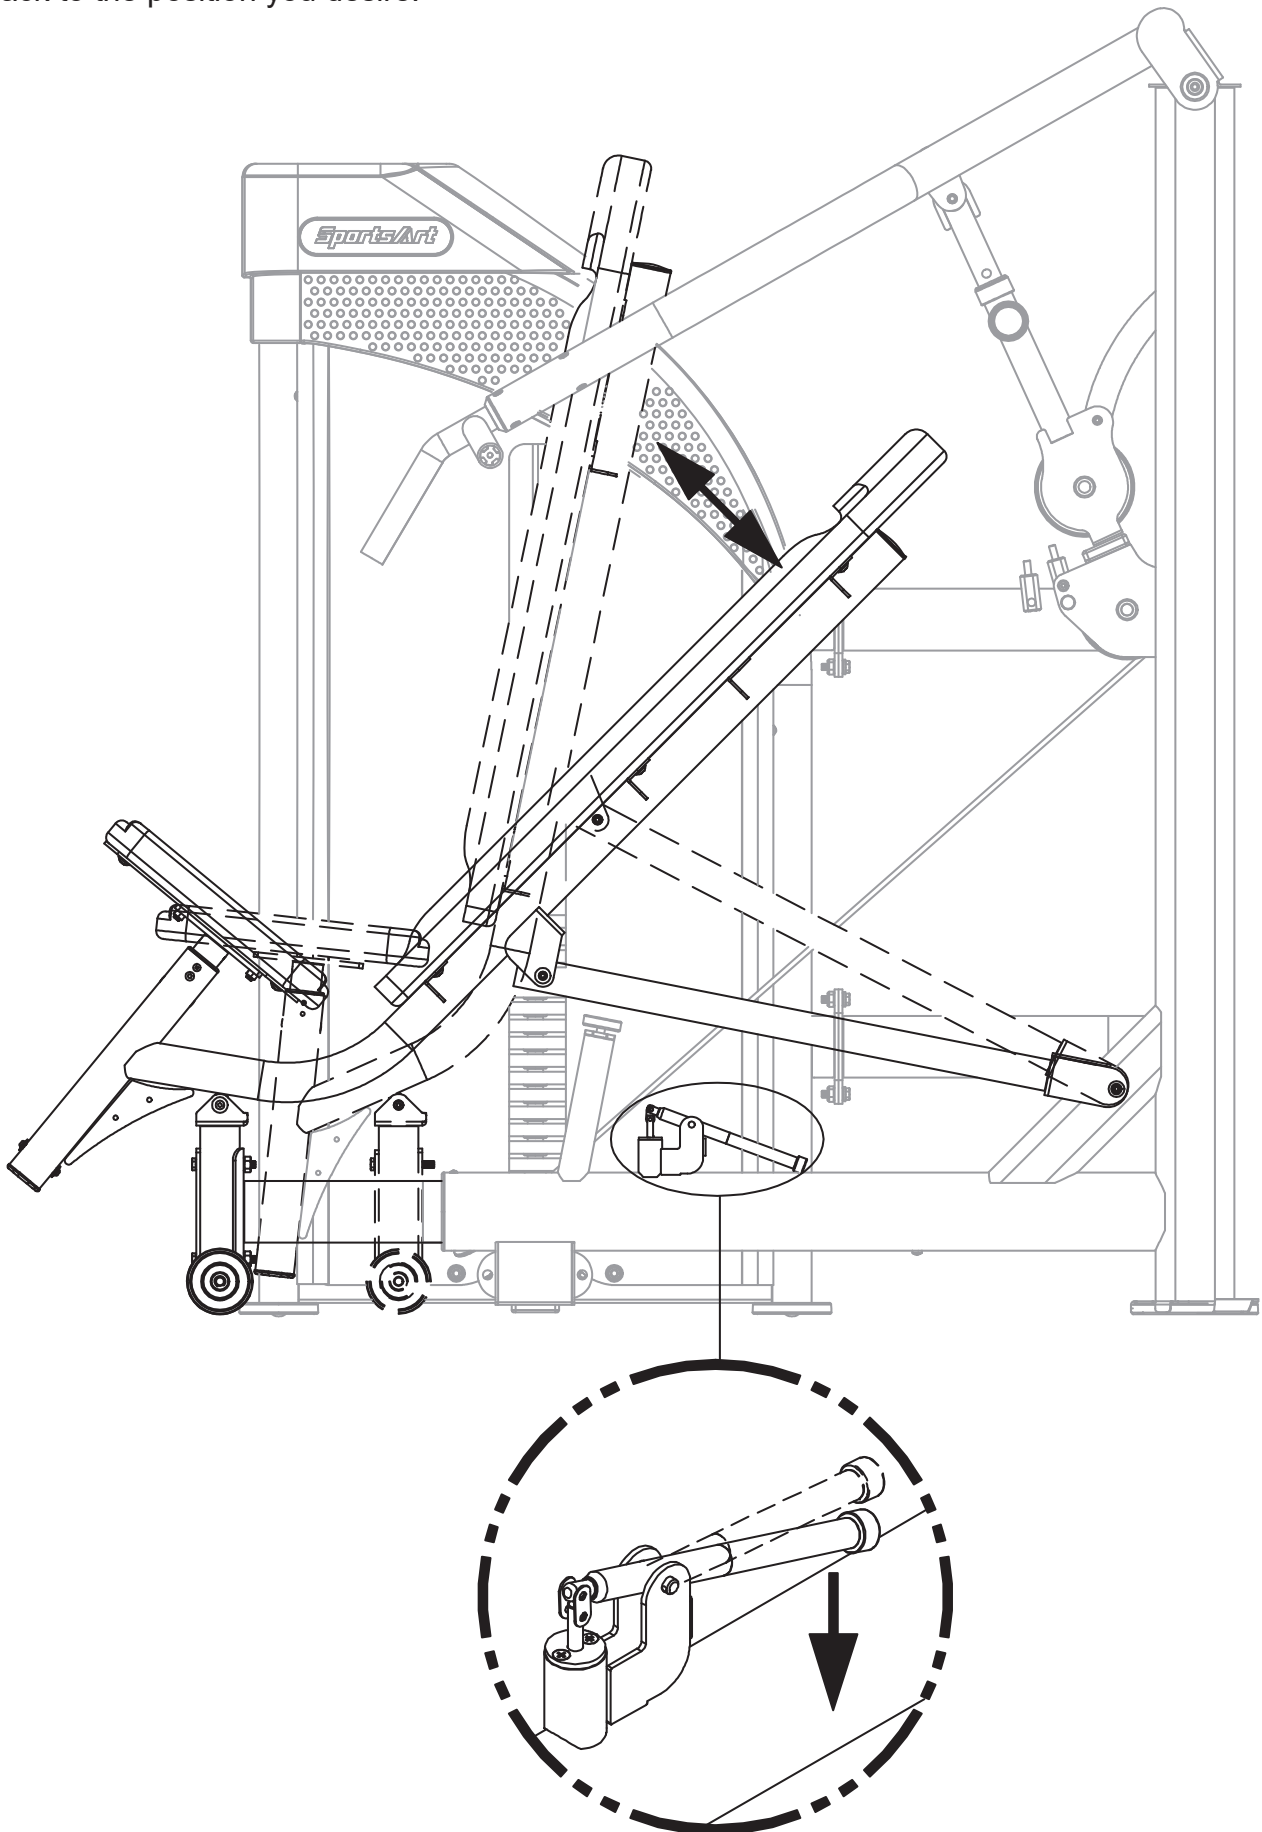

OPERATION Operating the Product (CONT.)

* To adjust the press handle, pull the adjustment knob outward and move the handle to the desired position.

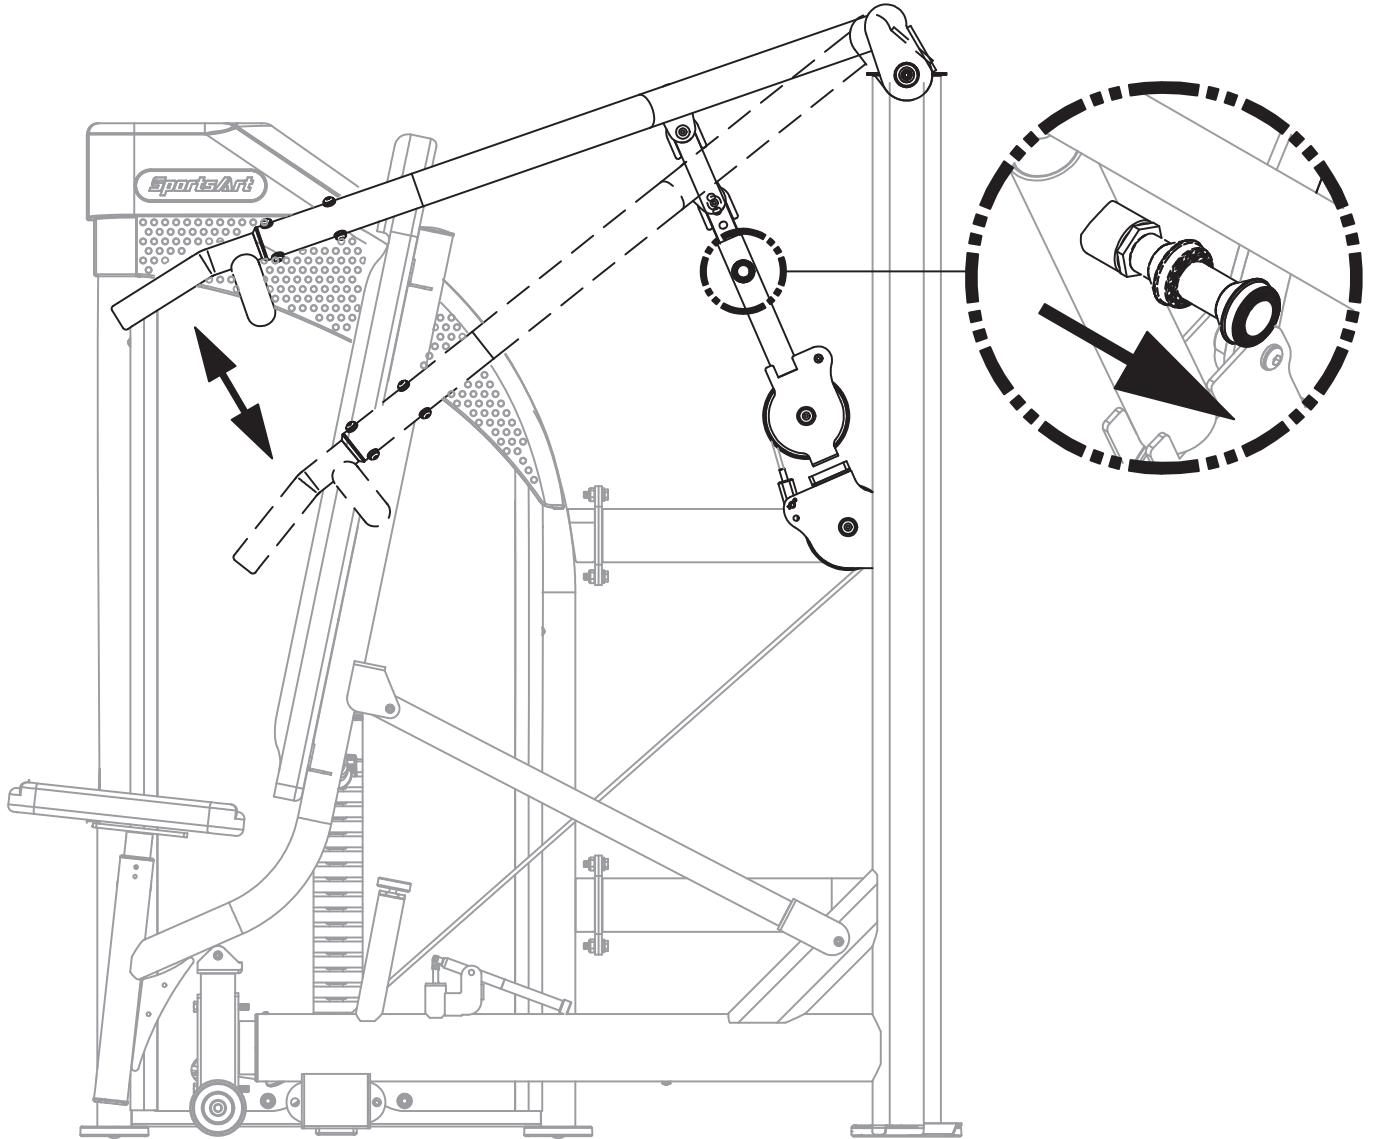


OPERATION Exercising Instructions

- (a) Select the appropriate weight plates according to your recommended exercise level.
 - (b) Adjust the seat height and seat back to the most comfortable position and make sure the knob is engaged to secure the position.
 - (c) Perform the exercise in a controlled manner. Inhale when pushing up against resistance and exhale when returning to original position.
- * Please exercise within the range of your skill and training. DO NOT work to exhaustion.
 - * All users operate this machine must be supervised under coaches instructions at all times in order for safety.


Please follow the operating instructions as below to test operation.

- (a) Please follow operating instructions on the product sticker to test operation and make sure the equipment is working properly.
- (b) Insert the stack fork at the heaviest weight setting at which you can safely operate the equipment. Exercise to lift the stack several times. Then inspect the cable for proper tightness. If necessary, make adjustments according to the instructions in this manual.

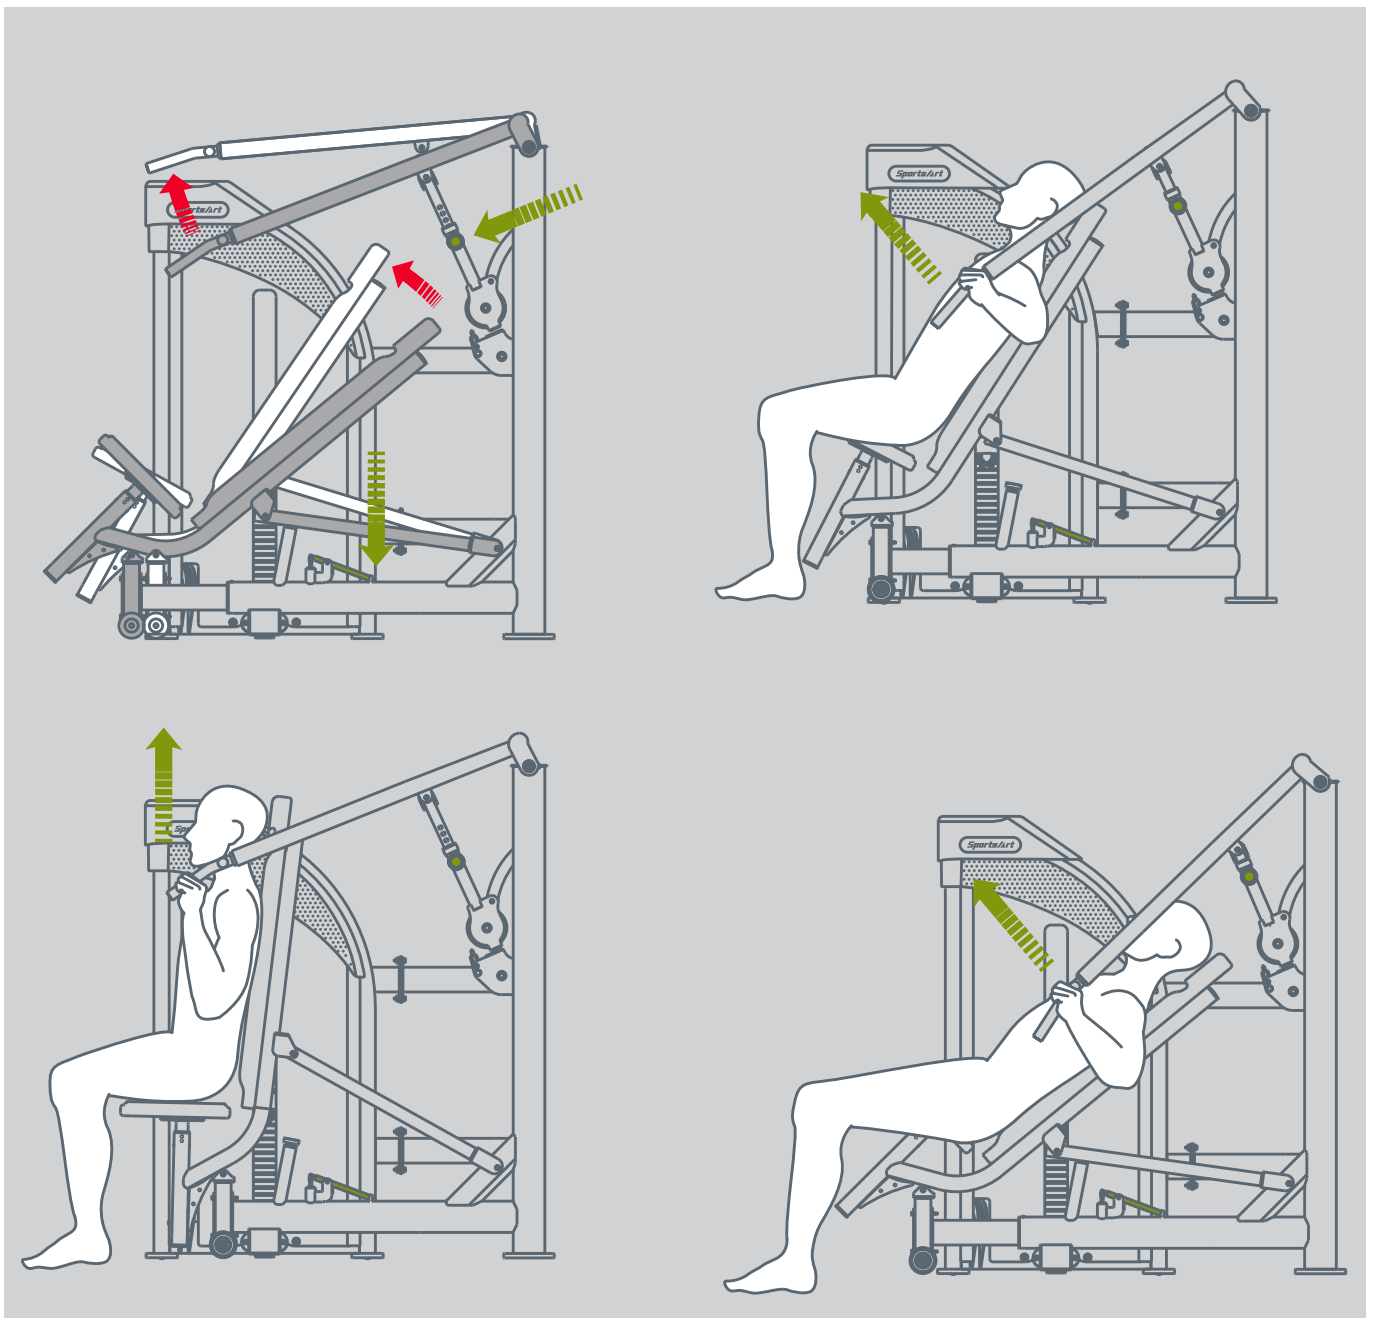

OPERATION Safety Operating Area

- (a) Safety clearance required as shown below. Do not allow people to be near this area when operating.
- (b) Noise emission under load is higher than without load.
- (c) Over exercising or improper workout position may result in serious injury.
- (d) This product is intended for exercise chest and shoulder.

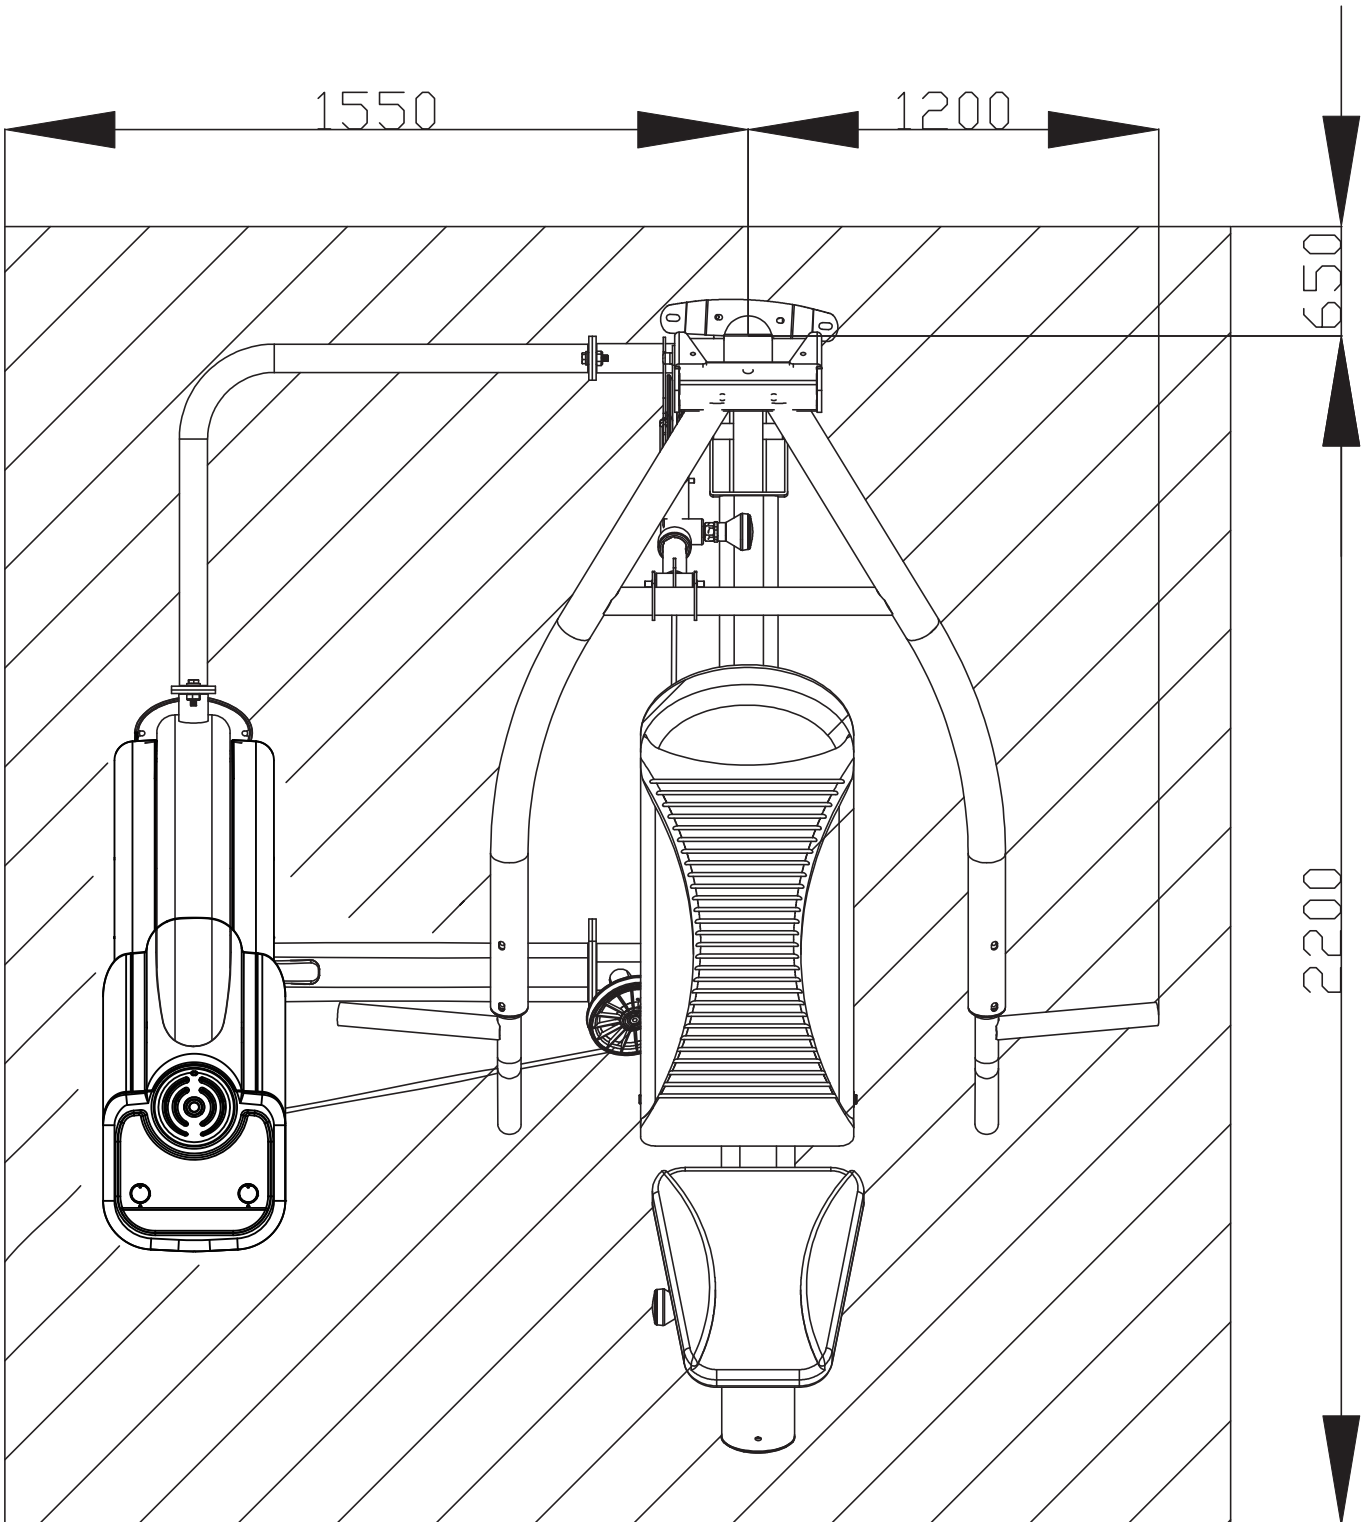

6. MAINTENANCE


This section covers maintenance topics and includes a maintenance schedule, task list, and log.

MAINTENANCE Safety Precautions

- Please follow standard safety precautions when servicing this product.
- Do NOT use a water damp towel to clean the product and do perform the following maintenances.
- Do NOT use cleaners with alcohol, ammonia, or other damaging chemicals. The use of such chemicals can damage the product and void the warranty. Never spray or pour any liquid directly onto the product. Doing so can damage components and void the warranty.
- Use a clean, lint-free towel, dampened with a mixture of Simple Green® all-purpose cleaner, to thoroughly clean the handlebar and the console.
- This product has moving parts that can be hazardous. Exercise caution when maintaining, operating, or moving this product.
- Do not use accessories or parts that are not specifically recommended by the manufacturer (SportsArt) . Such parts might cause injuries or cause the unit to fail and void the warranty. We are not responsible for any safety issue that arises due to the misuse of accessories or parts. At the same time, we will terminate the warranty terms of this equipment.
- Maintenance and repair must be performed by trained service personnel only. Improper maintenance would not only damage the machine, but may also present a danger to the exerciser.
- Keep this product out of use until maintenance is completed.

MAINTENANCE Guide Rod Cleaning and Lubricating

1. Apply lubricant to the guide rods every week. Procedure:
 - (a) Put some lubricant on a clean, lint-free cloth. Rub the lubricated cloth on the guide rods.
 - (b) Load the upper stack carriage set. Exercise to test operation.
 - (c) Repeat steps (a) and (b) 2-3 times. (Note: the cloth should be lint-free.)
2. After lubricating the guide rods, inspect cable tightness. Refer to the manual, and adjust it if necessary.

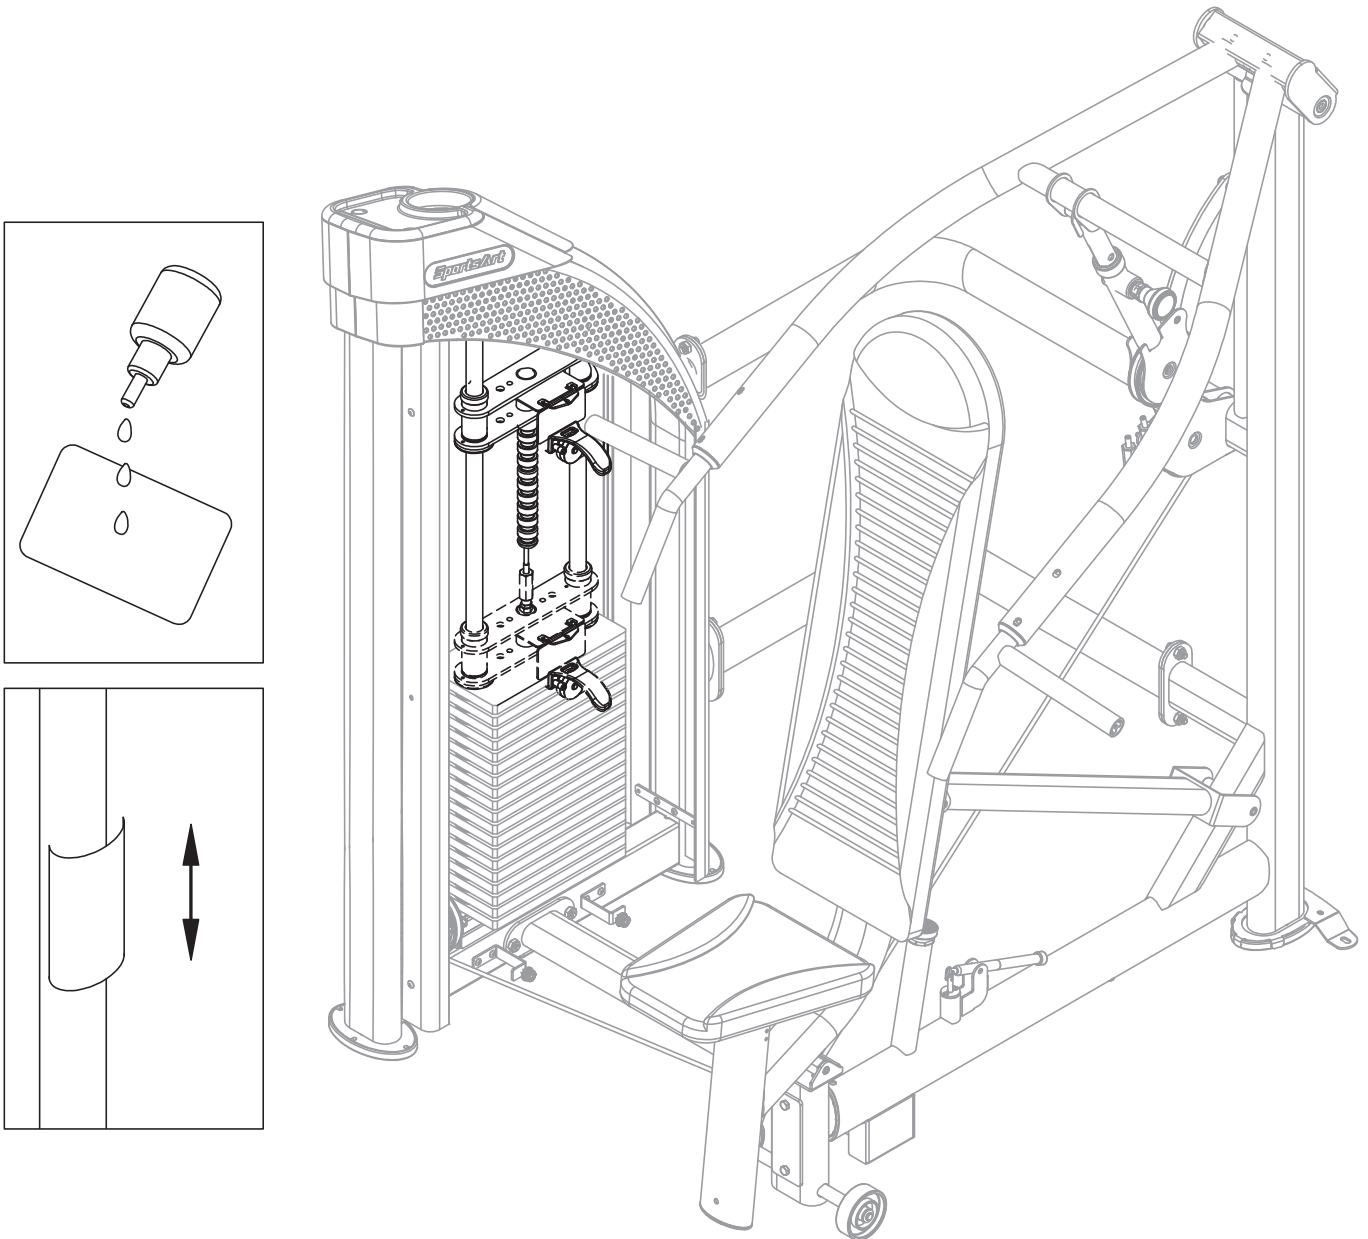

MAINTENANCE Schedule

If there is a need for maintenance of components, please visit the SportsArt website.
cleaning requirements


1.directive 93/42/CEE

2.directive biocide 98/8/CEE

The disinfectant has to be in compliance with Medical Device Directive 93/42/EEC (MDD) and Biocidal Products Directive 98/8/EC (BPD).

It is suited for sensitive synthetic surfaces such as synthetic leather, polycarbonate (PC), acrylic glass and polysulfone, and for the keyboards and control panels.

	Area	Day	Week	Month	Quarter	Year	Notes
1	Exterior	●					Clean.
2	Screws	●					Inspect for looseness and secure if necessary.
3	Test	●					Check for proper equipment operation.
4	Cushions	●					Use damp cloth to clean.
5	Cable		●				Check for damage or wear. Replace it if necessary.
6	Guide Rod		●				Clean and lubricate.
7	Extension Tube		●				Clean and lubricate.

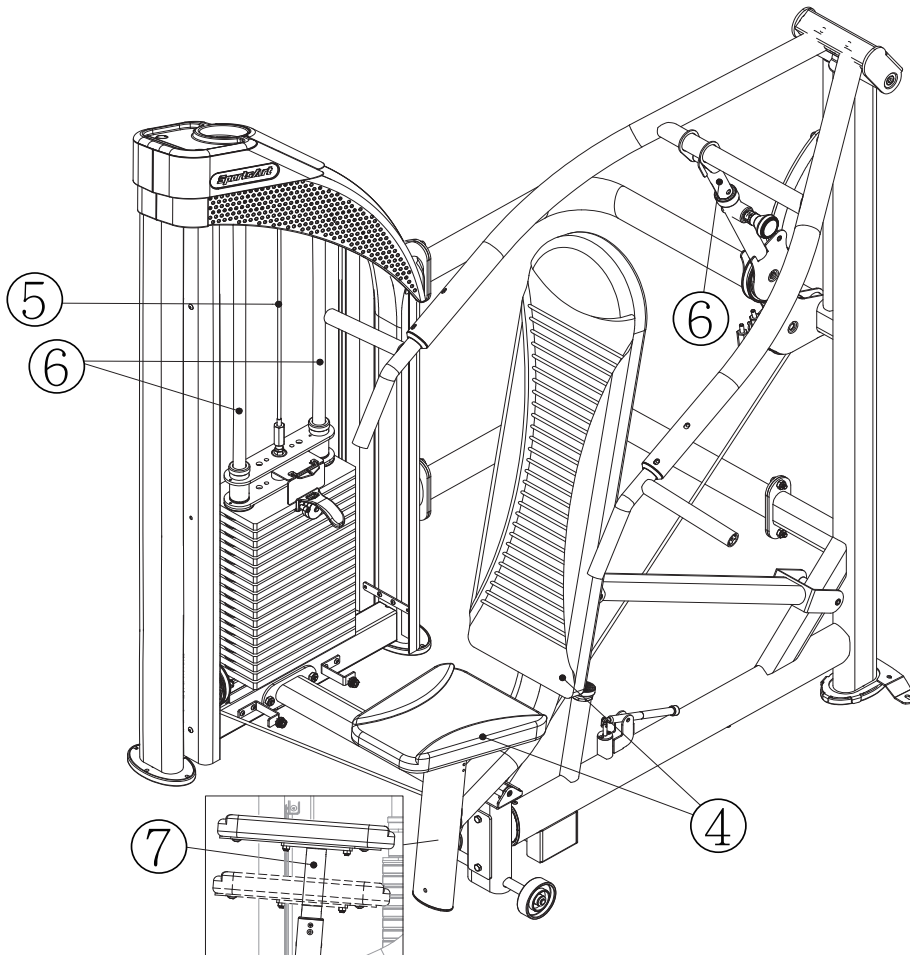

MAINTENANCE Task List

Like cars, fitness products require maintenance. Regular maintenance extends product life, and failure to maintain products can void the manufacturer's warranty. Copy the maintenance log sheet, and record maintenance work for each fitness product.

Daily tasks

1. Use a clean, lint-free towel to wipe down the product exterior.
2. Inspect all screws. Secure if necessary.
3. Make sure the machine is working properly.
4. Wipe all cushions clean with a damp cloth.

Weekly tasks

1. Check the cable for damage or tear.
2. Clean and lubricate the guide rods.

Caution

- Please follow standard safety precautions when servicing this product.
- Do NOT use cleaners with alcohol, ammonia, or other damaging chemicals. The use of such chemicals can damage the product and void the warranty. Never spray or pour any liquid directly onto the product. Doing so can damage components and void the warranty.

MAINTENANCE One-Year Maintenance Log

Facility: _____ Supervisor: _____

Product model number: _____ Serial number: _____

Start date: _____ End date: _____

Daily Tasks	Weeks 1-7	Weeks 8-14	Weeks 15-21	Week 22-28
Completed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Daily Tasks	Week 29-35	Week 36-42	Week 43-49	Week 50-52
Completed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Weekly Tasks	Weeks 1-7	Weeks 8-14	Weeks 15-21	Weeks 22-28
Completed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Weekly Tasks	Weeks 29-35	Weeks 35-42	Weeks 43-49	Weeks 50-52
Completed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Monthly tasks	1	2	3	4	5	6	7	8	9	10	11	12
Completed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Quarterly Tasks	Quarter 1	Quarter 2	Quarter 3	Quarter 4
Completed	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Yearly Tasks	Year 1
Completed	<input type="checkbox"/>

Notes: _____

7. CONSIGNES DE SÉCURITÉ IMPORTANTES



Le produit SportsArt a été conçu et fabriqué afin d'assurer une sécurité optimale. Cependant certaines précautions s'appliquent chaque fois que vous utilisez votre produit.

- Lisez entièrement le manuel avant l'assemblage et l'utilisation. Veuillez aussi noter les consignes de sécurité suivantes:
- Veuillez lire attentivement les instructions et installer le produit selon les instructions.
- Assemblez et faites fonctionner le produit sur une surface solide et plane; NE PAS l'utiliser à l'extérieur ou près de l'eau.
- En aucun cas, ne laissez des enfants à proximité ou sur le produit.
- Vérifiez le tapis de course avant chaque utilisation. Assurez-vous que toutes les pièces sont assemblées et que tous les éléments de fixation sont serrés. NE PAS utiliser le produit si l'appareil est démonté de quelque façon.
- Gardez vos mains loin des pièces mobiles.
- Portez des vêtements d'entraînement appropriés; NE PORTEZ PAS de vêtements amples. NE PORTEZ PAS de chaussures à semelles en cuir ou à talons hauts. Attachez les cheveux longs.
- Soyez prudent lors du montage et démontage de l'appareil.
- NE PAS utiliser d'accessoire non spécifiquement recommandé par le fabricant. Car cela pourraient provoquer des blessures ou entraîner une panne de l'appareil.
- Débranchez l'appareil de la prise avant l'entretien ou la suppression de toute pièce.
- Une surveillance étroite est nécessaire quand le produit est utilisé par ou à proximité d'enfants, de malades ou de personnes handicapées.
- Utilisez ce produit uniquement pour l'usage prévu dans ce manuel.
- La limite de poids de l'utilisateur pour le produit est de 227 kg, 500 lb.
- Ce produit n'est pas destiné à être utilisé par des personnes (y compris des enfants) dont les capacités physiques, sensorielles ou mentales sont réduites ou qui ne disposent pas de l'expérience ou du savoir nécessaires, sauf si celles-ci ont au préalable été formées eu égard à l'utilisation de produit par une personne responsable de leur sécurité.
- Les enfants doivent être encadrés afin d'empêcher qu'ils ne jouent avec le produit.


ATTENTION

Si vous ressentez une douleur ou si vous avez une sensation anormale, ARRÊTEZ VOTRE ENTRAÎNEMENT et consultez immédiatement votre médecin. Entraînez-vous à votre niveau d'exercice recommandé. NE PAS s'entraîner jusqu'à l'épuisement. Avant de commencer un programme d'exercice, vous devriez consulter votre médecin. Il est recommandé de faire un examen physique complet. Dans ce manuel, les mots "gauche" et "droit" sont utilisés en référence aux pièces et au produit. Comme tels, les mots "gauche" et "droit" font respectivement référence aux côtés gauche et droit de l'exerciseur. De même pour plus de concision, le mot «vis» est utilisé dans certains cas où des rondelles, des vis et autres matériels sont associés.


DF-308 Multi-Press



Shoulder Press



Inclined Chest Press

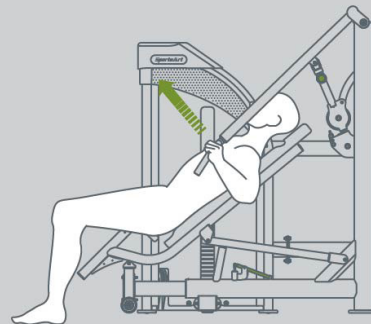


Chest Press

- 1 Adjust Seat positions while standing:
 - a. Seat Bottom - Adjust seat bottom up by simply lifting the seat. To lower, pull the side knob and move it into desired position.
 - b. Seat Back – Step on the foot lever behind the seat to release and move it into desired position.
 - c. Handles – Pull knob behind upper seat to adjust handle starting position.
- 2 Take your seat pressing your back into back cushion.
- 3 Select a safe manageable weight.
- 4 Grip handles and press in a controlled motion. Exhale while pushing against resistance.

CAUTION

Do not use this machine if you are unfamiliar or do not know how to operate it. Do not allow people near this machine when in use. Keep clear of parts not intended for contact during exercise. For your safety, exhale while you exert force. Never allow unattended children on or near fitness equipment.

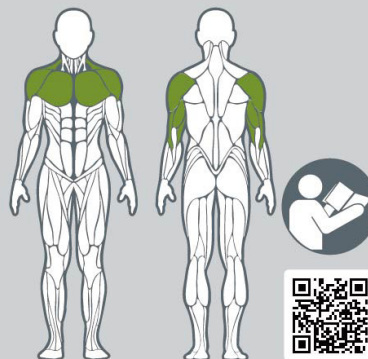

www.gosportsart.com

Your Authorized Distributor